

SPECIFICATIONS

MECHANICAL

Mechanical Life: 1000 operation cycles per switch.

Operation Force: 500gf max.

Operation Temp: -40°C to 85°C

ELECTRICAL

Electrical Life: 1000 operation cycles per switch 24VDC,25mA

Non-Switching Rating: 100mA,50VDC










Contact Resistance: 100mΩ max.at initial.

Insulation Resistance: 100MΩ min (at 500VDC)

Dielectric Strength: 300VAC/1 minute

Capacitance: 5pf max.


HOW TO ORDER

Model No.	No. of Positions	Seal	Package Style	
   	 			
DHN DHN F	02 04 06 08 10	□: Regular T: Top Tape Sealed	□: Tube T: Tape & Reel	V=Lead Free Solderable

TERMINATION / NUMBER OF POSITIONS

DHN

DHN -10	10	13.93[.548]
DHN - 8	8	11.39[.448]
DHN - 6	6	8.85[.348]
DHN - 4	4	6.31[.248]
DHN - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

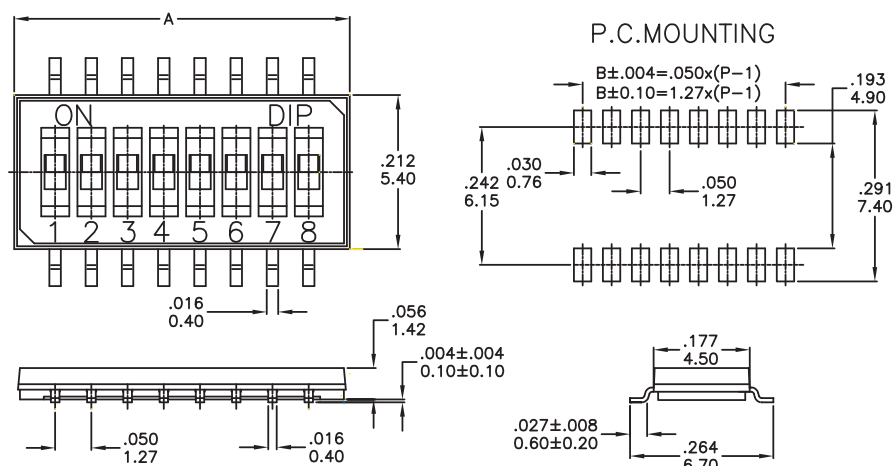

DHNF

DHNF -10	10	13.93[.548]
DHNF - 8	8	11.39[.448]
DHNF - 6	6	8.85[.348]
DHNF - 4	4	6.31[.248]
DHNF - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

