


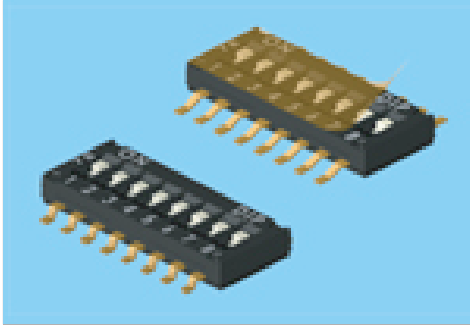


DS

DHN(F) 1.6mm Half Pitch Type**SPECIFICATIONS**

CONTACT RATING: 25mA @24 VDC (switching Rating)
 100mA @50VDC(non-switching Rating)
 ELECTRICAL LIFE:1,000 operation cycles
 CONTACT RESISTANCE: 100 mΩ max. initial
 INSULATION RESISTANCE: 100 MΩ min. @500 VDC
 DIELECTRIC STRENGTH: 300 V AC /1 min
 OPERATION FORCE: 500 gf
 STORAGE TEMPERATURE: -40 °C to 85 °C


DIMENSIONS

DHN

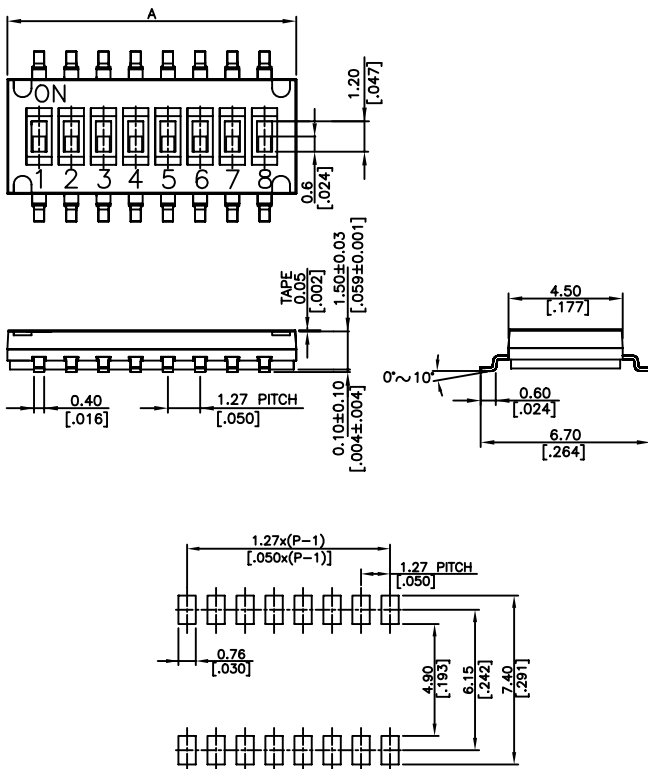

P.C.B. LAYOUT

DHN(F)

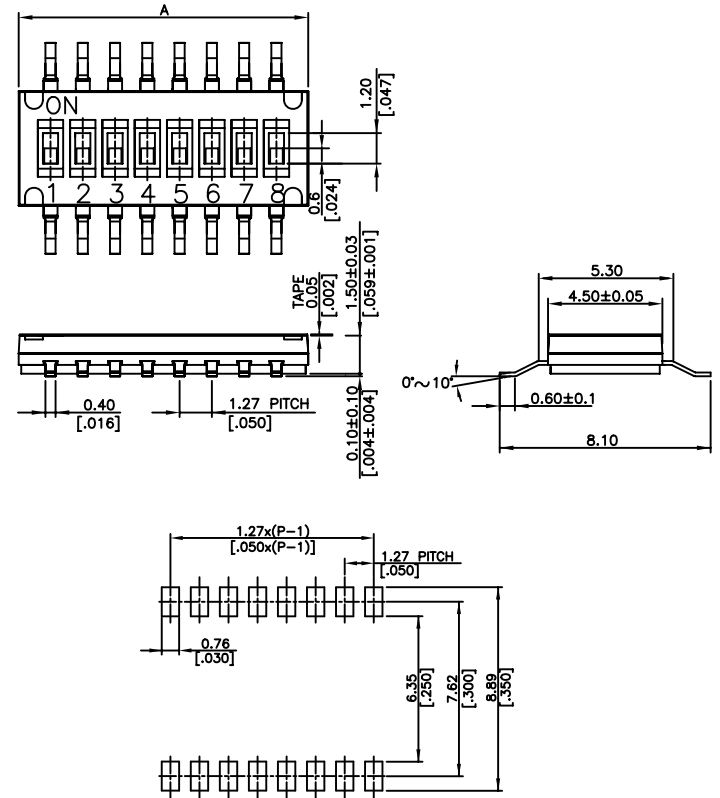

P.C.B. LAYOUT

General Tolerance:±0.2mm(±0.008")

HOW TO ORDER

D H N ☐ - ☐ ☐ F - ☐ - ☐ - H

RoHS Compliant

Package Style:
☐ = Tube
 T/R = Tape & Reel

☐ = Regular
 T = Top Tape Sealed

"OFF" Position

Positions:
 02, 04, 06, 08, 10

Length:
☐ = 6.7mm
 F = 8.1mm

MODELS

DHN(F)-02	2	3.77[.148]
DHN(F)-04	4	6.31[.248]
DHN(F)-06	6	8.85[.348]
DHN(F)-08	8	11.39[.448]
DHN(F)-10	10	13.93[.548]
PROD. NO	NO.OF POS	DIM A