


PUSH

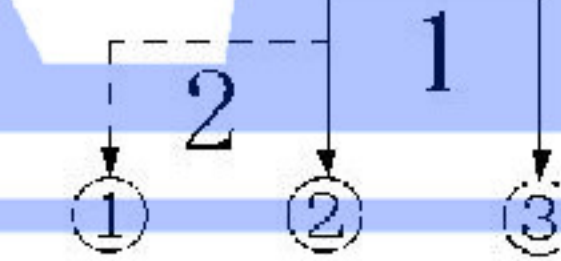

PUSH
SCHEMATIC

FEATURES

- Light operating force.
- Long term low contact resistance.
- Momentary or latching operation.
- Short stroke 1.5mm to latch.
- Compact spacing on PCB of 5.8mm.

SPECIFICATIONS

1.ELECTRICAL

• Contact rating	0.1 A, 30VDC
• Contact resistance	50mW Max.
• Insulation resistance	100M W Min. at 250VDC
• Dielectric strength	250VAC Min. for 60 sec.

2.MECHANICAL AND ENVIRONMENTAL

• Temperature rating	Operating: +5℃ to +55℃ Storage: -25℃ to +65℃
• Operation force	1.60±80gf
• Stroke	Lock Stroke: 1.1±0.2mm Full Stroke: 1.9±0.2mm
• Operating life	Full load: 1 x 10 ⁴ cycles No load: 1 x 10 ⁵ cycles
• Contact form	DPDT

PAPT NO	XKB5858-X-80
OPERATION	W:NO LOCK Z:LOCK

						DSND		DATE		SCALE: N/A	MODEL TYPE:
ΔX						ANGLAR					PUSH SWITCH
ΔX						L f 4				VIEW:	PART NO.:
ΔX						4< f 16				UNIT: mm	DWG NO.:
MARK	DESCRIPTION	DATE	REVISED	APPROVED		16< f 63				SIZE: A4	XKB5858-X-80
REVISIONS						L> 63					
UNSPECIFIED TOLERANCES						XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											1.0g
											SHEET
											1/1
											REVISION
											AO