








TER	ANG. (20°)	(15°)	(15°)	(20°)
①				
②				
③				

$$CCW \longleftrightarrow CW$$


CODE TABLE



Circuit Diagram

Typical Specifications


1. Rating : DC 0.1A 12V
2. Operating Force:
lever portion 2-80±50gf
Push portion 250±50gf
3. Mechanical life: 3,000 cycles
4. Operation Stroke: 0.8±0.2mm

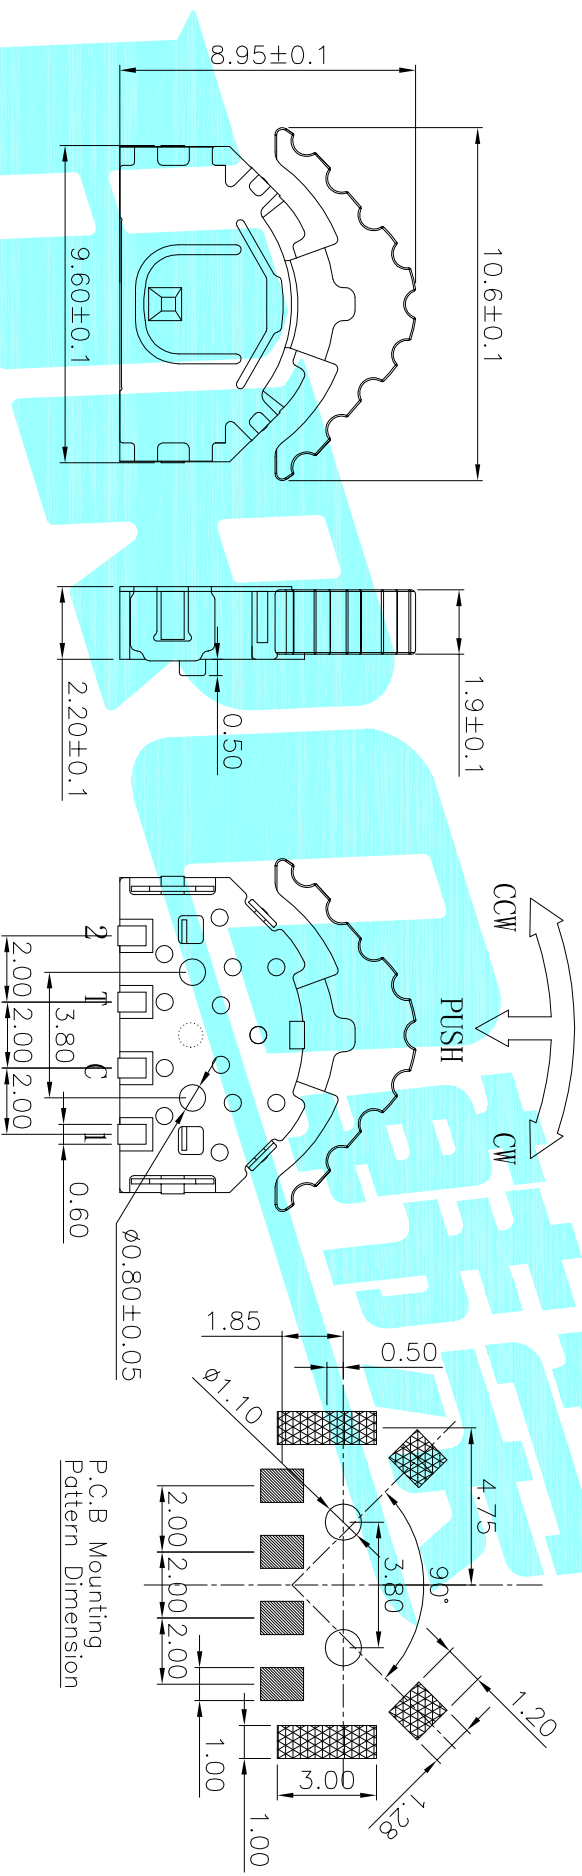

A technical drawing of a mechanical assembly, likely a pump or motor component, shown in two views. The top view is a side profile, and the bottom view is a cross-section. Numbered callouts (1-6) point to specific features:

- 1: Points to the outer casing or housing.
- 2: Points to the internal rotor or impeller assembly.
- 3: Points to the central shaft or hub of the rotor.
- 4: Points to the internal vanes or blades of the rotor.
- 5: Points to the internal seal or bearing assembly.
- 6: Points to the mounting flange or base.

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Contact	—	1	F Ag/Bross	—	—
⑤	Terminal	—	4	Brass(0.15t)	Plating silver	—
④	Base	—	1	Nylon	Black	—
③	Spring	—	1	SUS	—	—
②	Cover	—	1	SUS	White	—
①	Keystoke	—	1	Nylon	Black	—

APPROVALS		 ELECTRONICS CO.,LTD
DATE		
DRAWN	J.X.Zhong	2018/8/1

[illegible]