

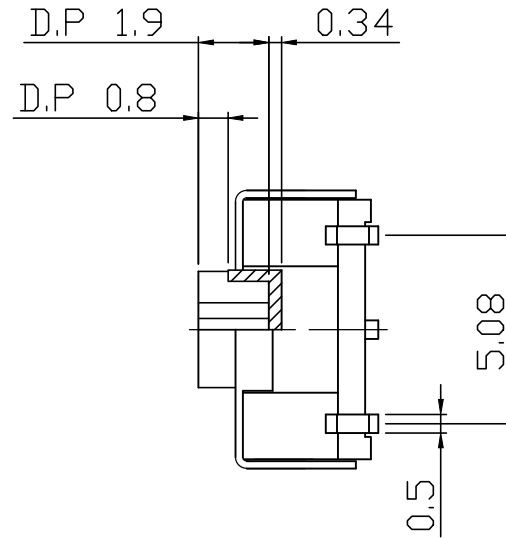
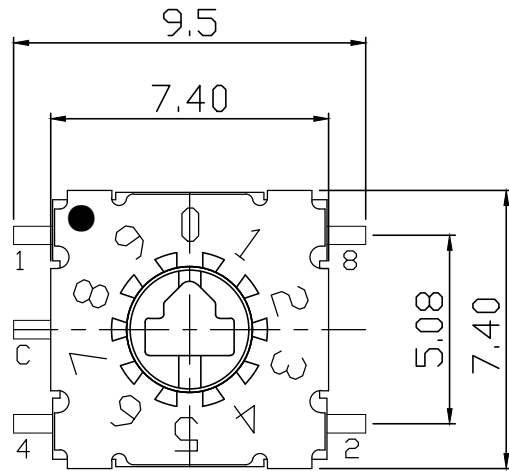
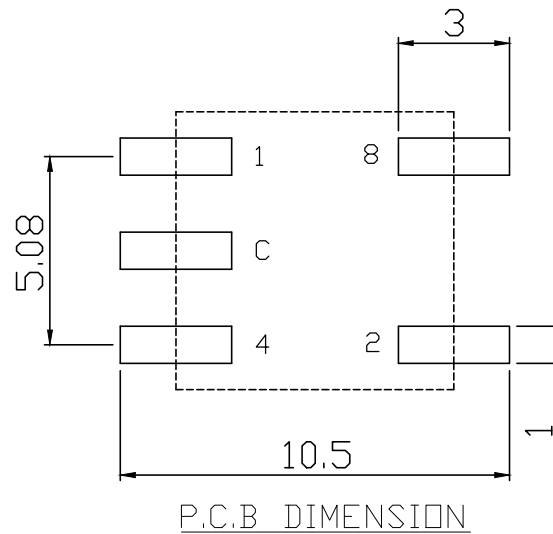


MARK	DATE	REMARKS
△		
△		

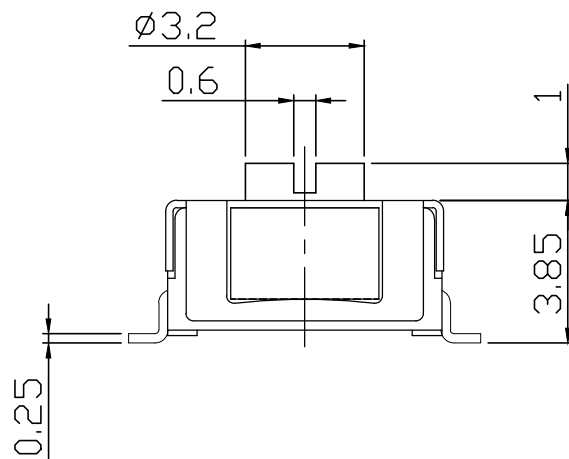

SPECIFICATION

- Operating Voltage : 42V
(None-Switching : 400mA)
(Switching : 100mA)
- Contact Resistance : 80mΩ Max
- Insulation Resistance : 100MΩ Min
- Operating Force : 120gf.cm ±30 Max
- Life Cycle : 25,000 steps
- Sealing : Comparable IP67

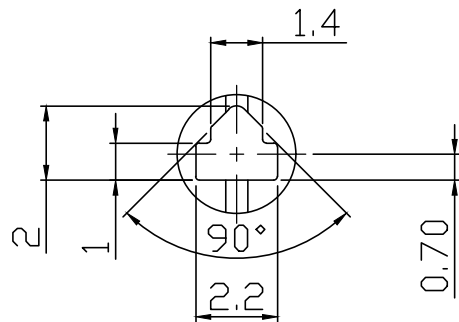

Complement Coded					
	C	1	2	4	8
0	●	●	●	●	●
1	●		●	●	●
2	●	●		●	●
3	●			●	●
4	●	●	●		●
5	●		●		●
6	●	●			●
7	●				●
8	●	●	●	●	
9	●		●	●	
A	●	●		●	
B	●			●	
C	●	●	●		
D	●		●		
E	●	●			
F	●				

APPD	CHKD	D'SGD	TITLE. MINI ROTARY DIP SWITCH	
J.P ROH	S.M PARK	Y.N JEON 2018.10.22	MODEL NO. MSGC-10SC	REV 01
SUNGmun ELECTRONICS CO., LTD.				