

KS



SPECIFICATIONS

CONTACT RATING: 10mA~100mA, 2V DC~30V DC

OPERATION LIFE: 50,000 cycles

CONTACT RESISTANCE: 50mΩ max.(initial)

250mΩ max.(initial)


INSULATION RESISTANCE: 100MΩ min. 500VDC

OPERATING TEMPERATURE: -40°C to +85°C

SOLDERING TEMPERATURE: 350°C for 3 seconds



DIMENSIONS

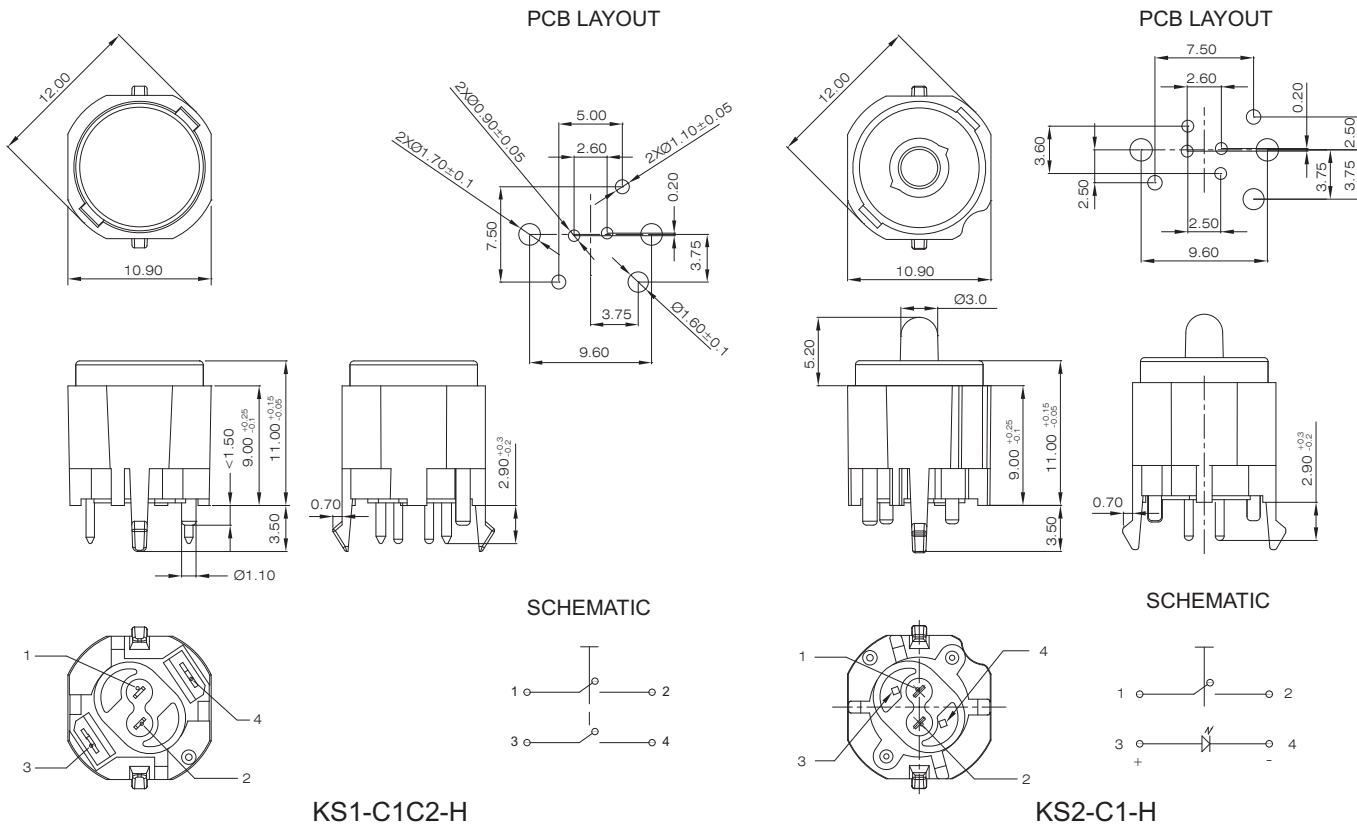

HOW TO ORDER

KS1 - C1C2 - 2 - 6/12N - 2 - 10 - 6 - H

KS1: rounded Housing
KS2: rounded with gap Housing

Switch Circuit

C1	PIN1&PIN2
C2	PIN3&PIN4
C1C2	PIN1&PIN2/ PIN3&PIN4

Step

0	0 step
1	1 step/1.0mm
11	1 step/1.5mm
2	2 steps

Operation Force

6N	6N
6/12N	6/12N
20N	20N

RoHS Compliant

LED color Only for KS2

none	
6	Green

Cap color

2	black
10	Violet

Housing color

1	white
2	black