




SMD TYPE

# STP-1243S

STP 1243S



STP 1250S

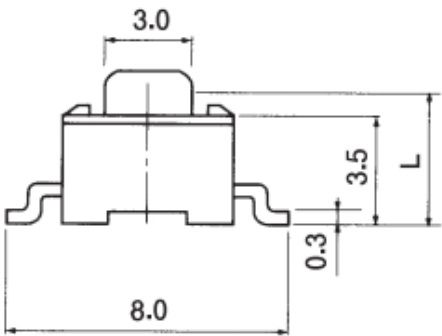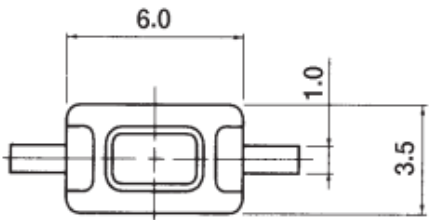

- 1. Rating 工作电流, 电压 : DC 12V, 50mA
- 2. Travel 移动 :  $0.25 \pm \begin{smallmatrix} 0.2 \\ 0.1 \end{smallmatrix}$  m/m
- 3. Contact Resistance 接触电阻 : 100mΩ Max.
- 4. Life Cycle 使用寿命 : 50,000 Cycles
- 5. Reel Package : 1,500PCS/REEL

Model No.	Operating Force	Stem(L)
STP 1243S	180 ± 30gf	4.3mm
STP 1250S	180 ± 30gf	5.0mm
STP 1243SW	260 ± 50gf	4.3mm
STP 1250SW	260 ± 50gf	5.0mm