


SPDT

# SP-12SP

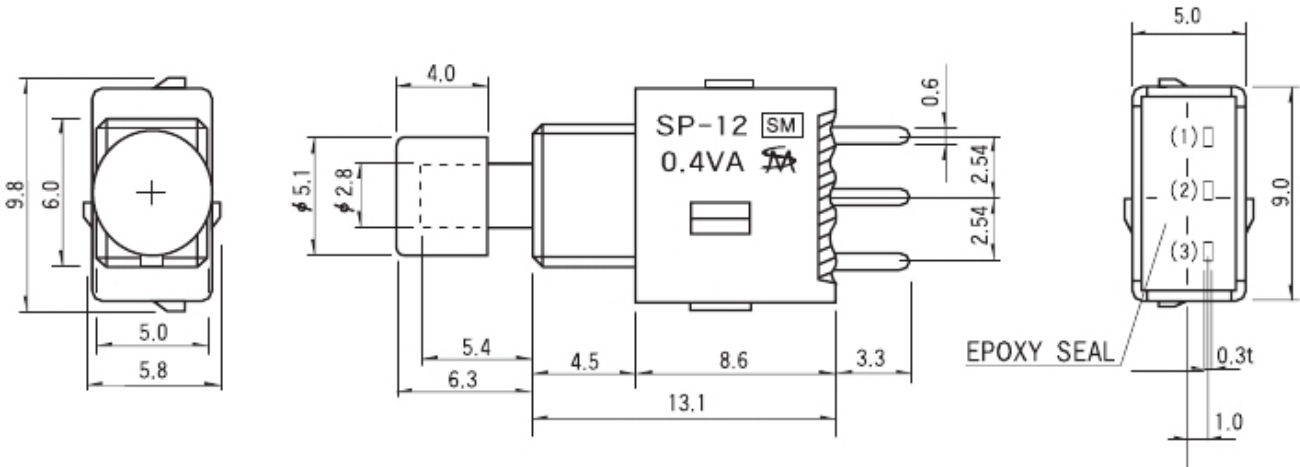


## Order Code Order 选型表

Type	Poles	Circuit	Push Length	Terminals	SMD Type
ex) SP	1	2	S	H	S

## General Specification 产品性能

1. Rating 工作电流, 电压	0.4VA at 28V AC or DC Max.
2. Contact Resistance 接触电阻	Max 50m $\Omega$
3. Insulation Resistance 绝缘电阻	Min 500M $\Omega$ , at DC 500V

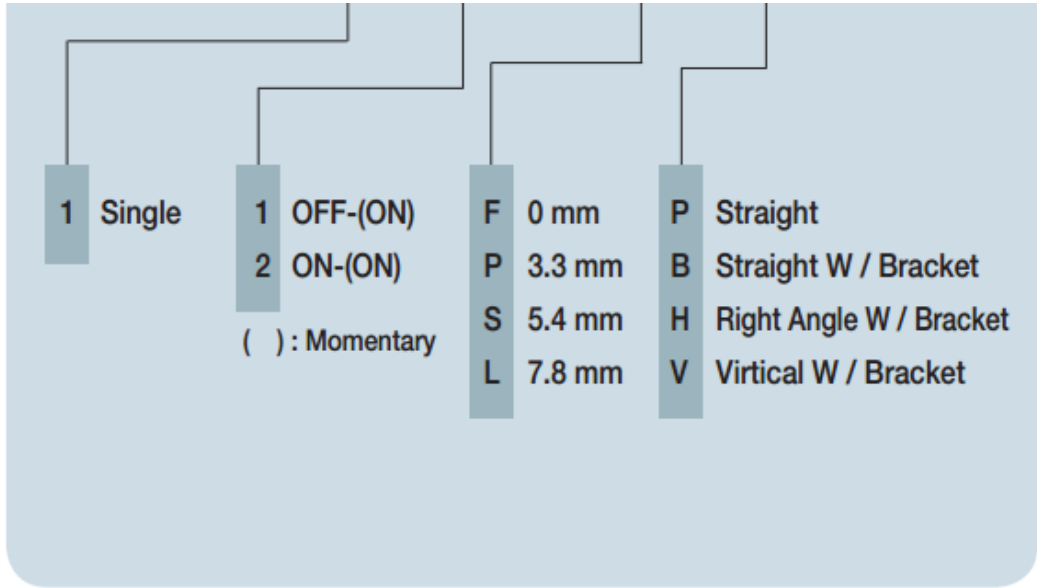

4. Operating Force 操作力	1 Minute at AC 500V
5. Life Cycle 使用寿命	250±100gf (1 pole), 350±100gf (2pole)
6. Travel 移动	1.1mm
7. Ambient Temp. Range 环境温度范围	-30℃~ + 85℃
8. Solder Conditions 焊接方式	5 sec, 270℃

MODEL	POLES	CIRCUIT		SCHEMATICS
		NORMAL	DOWN	
SP-11	SPST	OFF	(ON)	
SP-12	SPDT	ON 2-3	(ON) 1-2	