

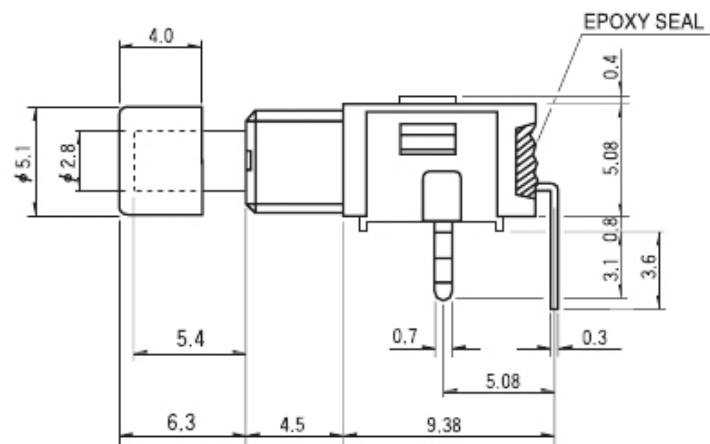


SPDT

# SP-12SH

SP-12SH

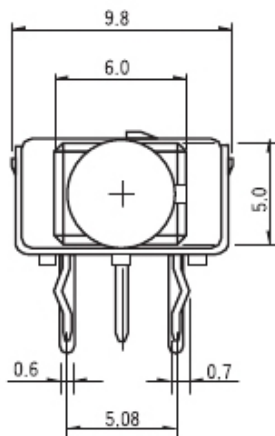

## Order Code Order 选型表

	Type	Poles	Circuit	Push Length	Terminals	SMD Type
ex)	SP	1	2	S	H	S

## General Specification 产品性能

- |                                  |                                |
|----------------------------------|--------------------------------|
| 1. Rating<br>工作电流, 电压            | 0.4VA at 28V AC or DC Max.     |
| 2. Contact Resistance<br>接触电阻    | Max 50m $\Omega$               |
| 3. Insulation Resistance<br>绝缘电阻 | Min 500M $\Omega$ , at DC 500V |

1

Single

1

OFF-(ON)

2

ON-(ON)

( )

: Momentary

F

0 mm

P

3.3 mm

S

5.4 mm

L

7.8 mm

P

Straight

B

Straight W / Bracket


H

Right Angle W / Bracket

V

Virtual W / Bracket

4. Operating Force 操作力	1 Minute at AC 500V
5. Life Cycle 使用寿命	250±100gf (1 pole), 350±100gf (2pole)
6. Travel 移动	1.1mm
7. Ambient Temp. Range 环境温度范围	-30℃~ + 85℃
8. Solder Conditions 焊接方式	5 sec, 270℃

MODEL	POLES	CIRCUIT		SCHEMATICS
		NORMAL	DOWN	
SP-11	SPST	OFF	(ON)	
SP-12	SPDT	ON 2-3	(ON) 1-2	