

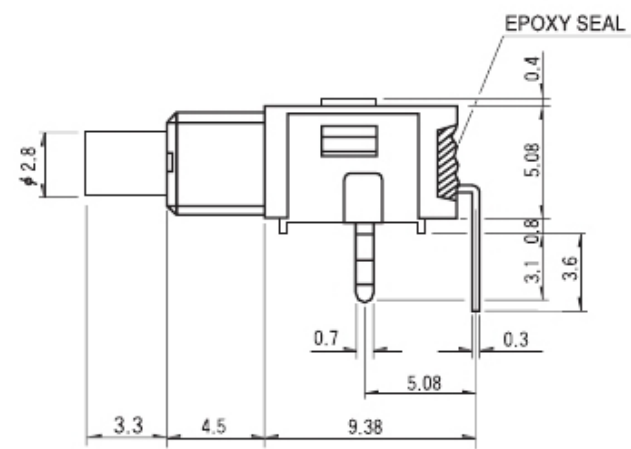


SPDT

SP-12PH

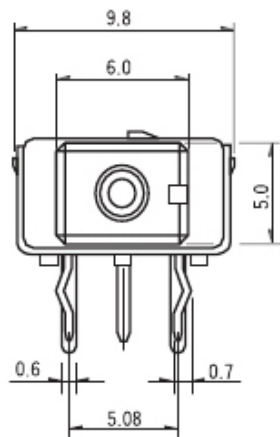

Order Code Order 选型表


Type	Poles	Circuit	Push Length	Terminals	SMD Type
ex) SP	1	2	S	H	S

General Specification 产品性能

1. Rating 工作电流, 电压	0.4VA at 28V AC or DC Max.
2. Contact Resistance 接触电阻	Max 50m Ω
3. Insulation Resistance 绝缘电阻	Min 500M Ω , at DC 500V
4. Operating Force	1 Minute at AC 500V

1	Single	1	OFF-(ON)	F	0 mm	P	Straight
		2	ON-(ON)	P	3.3 mm	B	Straight W / Bracket
			() : Momentary	S	5.4 mm	H	Right Angle W / Bracket
				L	7.8 mm	V	Virtual W / Bracket

操作力	
5. Life Cycle 使用寿命	250±100gf (1 pole), 350±100gf (2pole)
6. Travel 移动	1.1mm
7. Ambient Temp. Range 环境温度范围	-30℃~ + 85℃
8. Solder Conditions 焊接方式	5 sec, 270℃

MODEL	POLES	CIRCUIT		SCHEMATICS
		NORMAL	DOWN	
SP-11	SPST	OFF	(ON)	
SP-12	SPDT	ON 2-3	(ON) 1-2	