


SPST

SP-11SH

SP-11SH

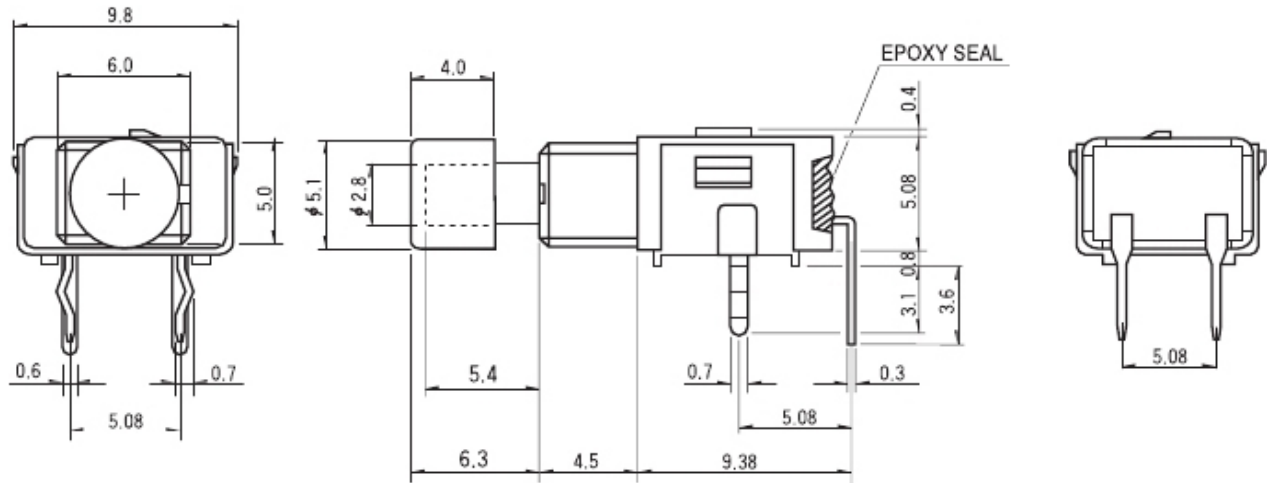

Order Code Order 选型表


Type	Poles	Circuit	Push Length	Terminals	SMD Type
ex) SP	1	2	S	H	S

General Specification 产品性能

1. Rating 工作电流, 电压	0.4VA at 28V AC or DC Max.
2. Contact Resistance 接触电阻	Max 50mΩ
3. Insulation Resistance 绝缘电阻	Min 500MΩ, at DC 500V
4. Operating Force	1 Minute at AC 500V

1	Single	1	OFF-(ON)	F	0 mm	P	Straight
		2	ON-(ON)	P	3.3 mm	B	Straight W / Bracket
		()	: Momentary	S	5.4 mm	H	Right Angle W / Bracket
				L	7.8 mm	V	Virtual W / Bracket

4. Operating Force	1 minute at AC 500V
操作力	
5. Life Cycle	250±100gf (1 pole),
使用寿命	350±100gf (2pole)
6. Travel	1.1mm
移动	
7. Ambient Temp. Range	-30℃~ + 85℃
环境温度范围	
8. Solder Conditions	5 sec, 270℃
焊接方式	

MODEL	POLES	CIRCUIT		SCHEMATICS
		NORMAL	DOWN	
SP-11	SPST	OFF	(ON)	
SP-12	SPDT	ON 2-3	(ON) 1-2	