


How to Order 选型表

	Type	Actuators	Code	Position	Terminals	Solder Condition
	1	2	3	4	5	6
ex)	D	D	R	10	H	-

General Specification 产品性能

1. Rating 工作电流, 电压	Voltage 42V 150mA (Switching) 200mA (None-Switching)
2. Contact Resistance 接触电阻	80mΩ Max
3. Insulation Resistance 绝缘电阻	100MΩ Min
4. Operating Force 操作力	700gf Max
5. Life Cycle 使用寿命	10,000 steps
6. Solder Condition 焊接方式	Reflow Soldering : 10s/260°C Iron Soldering : 4s/350°C Wave Soldering : 5s/280°C
7. Sealing	IP67 (Dust & Water Proof)

2 Actuators 外观形式

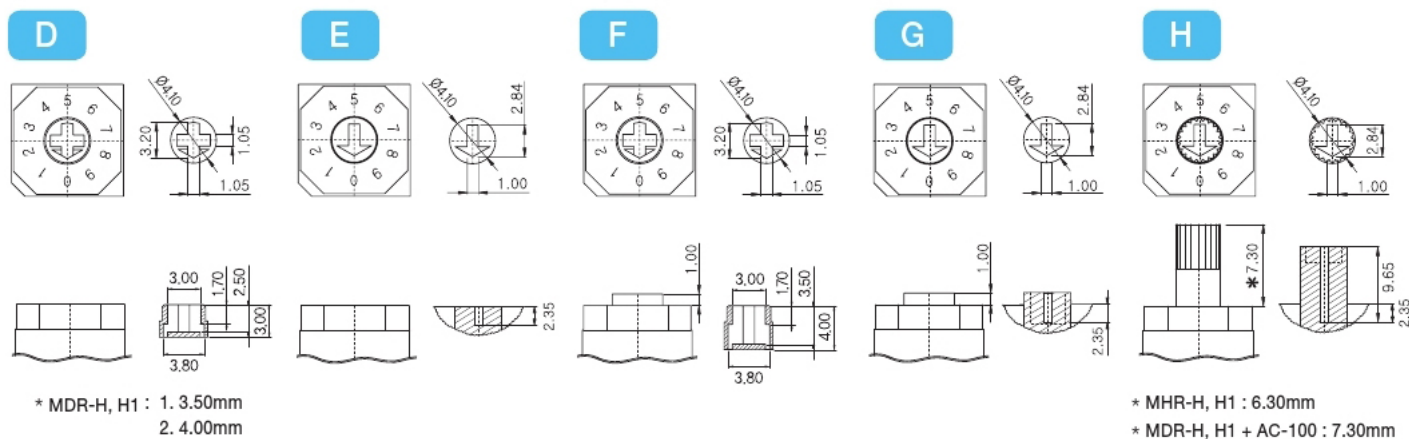

3 Code 编码表

See Page 40

4 Position 位数形式

4 Position

6 Position


8 Position

10 Position


16 Position

5 Terminals PIN角形式

H Angle Type (5.08)



H1 Angle Type (2.54)



6 Solder Condition 焊接方式

-

PCB Hole Type : Iron Soldering : 2s/340°C

Wave Soldering : 5s/280°C

T


Through Hole Reflow : Reflow Soldering : 10s/260°C

Iron Soldering : 2s/340°C

Wave Soldering : 5s/280°C


7 Packing 包装形式

- Tube Packing Q'ty : 50pcs / Tube

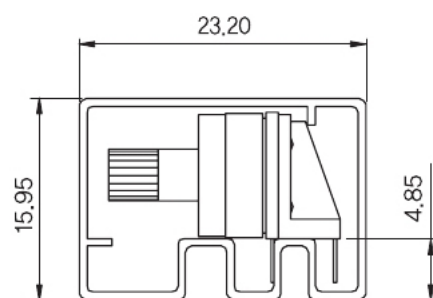

Accessories 配件


AC-100



* Applicable to only 'D' Actuators

* Should be mounted after soldering

BC-200



BC-200

L : 7.3mm

BC-201

L : 11.6mm

BC-202

L : 13.3mm

G : Gray R : Red K : Black
Y : Yellow B : Blue C : Clear