



PDR-08



PDR-08

1 Type

Octagon  
Type

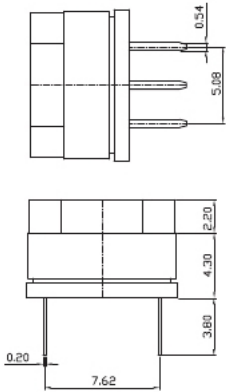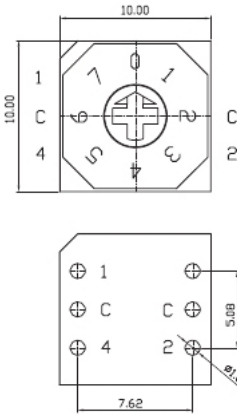

How to Order 选型表

	Type	Actuators	Code	Position	Terminals	Solder Condition
	1	2	3	4	5	6
ex)	P	E	R	10	C	-


  

	Type	Actuators	Code	Position	Terminals	Solder Condition
	1	2	3	4	5	6
ex)	M	E	R	10	C	-

General Specification 产品性能

1. Rating 工作电流, 电压	Voltage 42V 150mA (Switching) 200mA (None-Switching)
2. Contact Resistance 接触电阻	80mΩ Max
3. Insulation Resistance 绝缘电阻	100MΩ Min
4. Operating Force 操作力	700gf Max
5. Life Cycle 使用寿命	10,000 steps
6. Solder Condition 焊接方式	Iron Soldering : 2s/340°C Wave Soldering : 5s/280°C
7. Sealing 防水系数	IP67 (Dust & Water Proof) * Except Cross Type of Actuator ("D" Type)

## 2 Actuators 外观形式

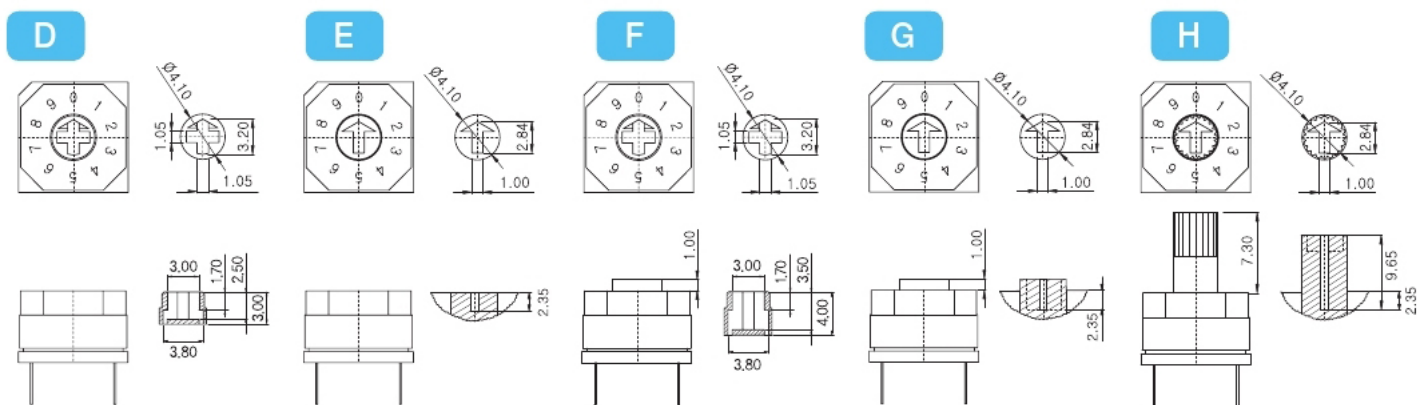

## 3 Code 编码表

See Page 37

## 4 Position 位数形式

4 Position

6 Position


8 Position

10 Position


16 Position

## 5 Terminals PIN角形式

- Standard Type



C (3 × 2 Ter')



## 6 Solder Condition 焊接方式

-


PCB Hole Type : Iron Soldering : 2s/340°C  
Wave Soldering : 5s/280°C

T

Through Hole Reflow : Reflow Soldering : 10s/260°C  
Iron Soldering : 2s/340°C  
Wave Soldering : 5s/280°C


## 7 Packing 包装形式

- Tube Packing Q'ty : 50pcs / Tube

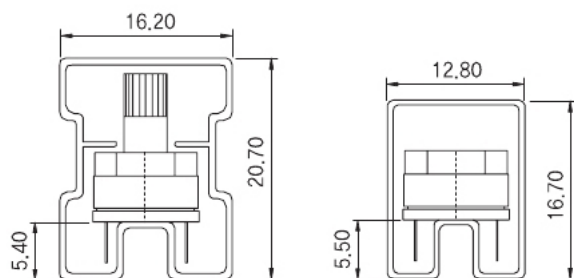


## Accessories 配件

AC-100 G



\* Applicable to only 'D' Actuators  
\* Should be mounted after soldering

BC-200 G



G : Gray R : Red K : Black  
Y : Yellow B : Blue C : Clear