

Rocker Switches






Electrical Rating : 12A 125VAC 6A 250VAC (UL)
4(1)A 250VAC (VDE)
16A 250VAC/21A 125VAC(UL)
16(6)A 250VAC(VDE) R91,R9D


MATERIALS

X2-R9 1 2 K K E T 0 0 F 1


We have invented the rules
www.dailywell.com.tw

OPTIONS OF SWITCH FUNCTION / DIMENSION

Item Number	Poles & Throws	Rocker Position		
				
X2-R91	SPST	ON	NONE	OFF
X2-R99	SPST (WITH LAMP)	ON	NONE	OFF
X2-R9D	DPST	ON	NONE	OFF
X2-R9Y	DPST (WITH LAMP)	ON	NONE	OFF
X2-R9I	Indicator			
X2-R9B	The block sealed on the panel			

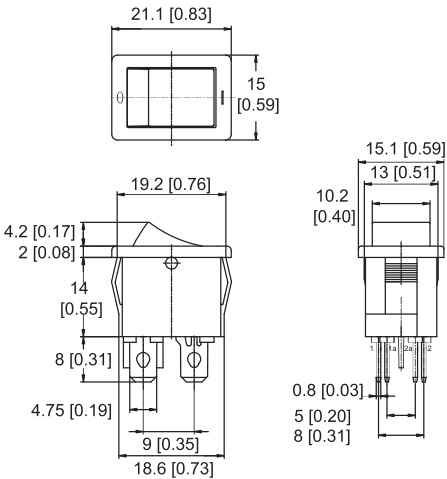


PANEL CUT OUT



Z	Y	X
0.7~1.25	12.8~12.9	19.2~19.3
1.25~2.0	12.8~12.9	19.3~19.4
2.0~3.0	12.8~12.9	19.5~19.6


CIRCUITS FOR SWITCH WITH LAMP

For circuit of 250VAC, 125VAC with neon lamp
For circuit of 24 VDC, 12 VDC, 6 VDC, 3 VDC with lamp
For circuit of 48 with LED

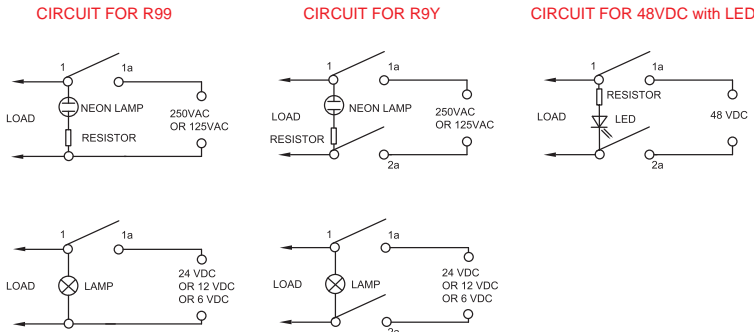


TERMINAL TYPE

T Type




Quick Connect Tab

R Type



Right Angle PC Through Hole Terminal

L Type



Left Angle PC Through Hole Terminal