

SPECIFICATIONS


CIRCUIT : DPDT
RATING : 0.1A, DC30V MAX/100mA, DC1.5V MIN
CONTACT RESISTANCE : 50 mΩ MAX.
INSULATION RESISTANCE : 100 MΩ MIN.
ELECTRICAL LIFE : 50,000 cycles
ACTUATION FORCE : 250 ± 100g
TRAVEL:
1. Full Travel : 1.5 ± 0.4mm
2. Contact Travel : 1.0 ± 0.4mm
OPERATING TEMPERATURE RANGE : -20°C to 70°C

MATERIALS

CASE : Glass filled Nylon 6/6, black.
HOUSING : Glass filled Nylon 6/6, black.
ACTUATOR : Glass filled Nylon 6/6, black.
CONTACT : Phosphor bronze, silver plated.
TERMINALS : LCP, Black & Brass, silver plated.

HOW TO ORDER

MODEL NO. FUNCTION LED COLOR




Function
7 On-Mom
L On-On

ITEM NO	COLOR
0	Without LED
1	White
3	Red
5	Yellow
6	Green
7	Blue

CAP OPTION				
DIMENSION				
COLOR	CAP CODE			
TRANSPARENT	—	H	—	—
ICE	—	—	G	D
SNOW	—	—	—	F
WHITE	C	B	—	—

SWITCH FUNCTION


TYPE	Switch Action	
PSD7	Normal ON	Push (ON)
PSDL	Normal ON	LOCK ON
Connected Terminals	1-2 4-5	2-3 5-6
LED Circuit		



P.C.B LAYOUT

DIMENSION

PSD7

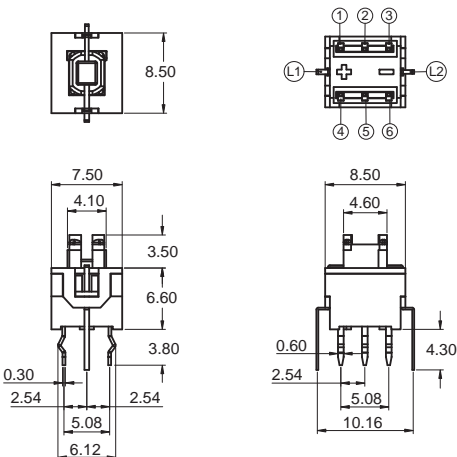

PSDL

