

SPECIFICATIONS


CONTACT RESISTANCE: DC 5V 1A 30mΩ max
 INSULATION RESISTANCE: DC 500V 100MΩ min
 DIELECTRIC STRENGTH: AC 500V 1 minute
 ELECTRICAL LIFE: 5,000 cycles
 MECHANICAL LIFE: 10,000 cycles
 OPERATION FORCE: 500 ± 150g

SPECIFICATIONS

INSULATION RESISTANCE : >100mΩ DC250V
 WITH VOLTAGE : AC250V 1 minute
 CONTACT RESISTANCE : <50mΩ
 SOLDERING TEMPER. : 250°C max. 3 sec
 MECHANICAL LIFE : 100,000 cycles
 ELECTRICAL LIFE : 10,000 cycles
 OPERATION FORCE : 160 ± 80g
 MODELS: 807*-H : Non-Lock
 809*-H : Lock with click sound


*RoHS Compliant: Please add a code "H" to part number. For example: 807-H

S18-21

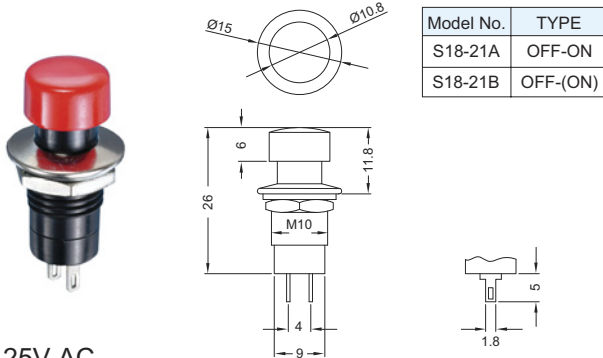


1A 125V AC

S18-23

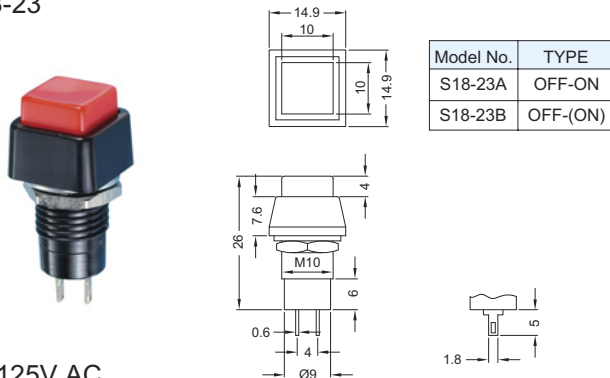


1A 125V AC

S18-25

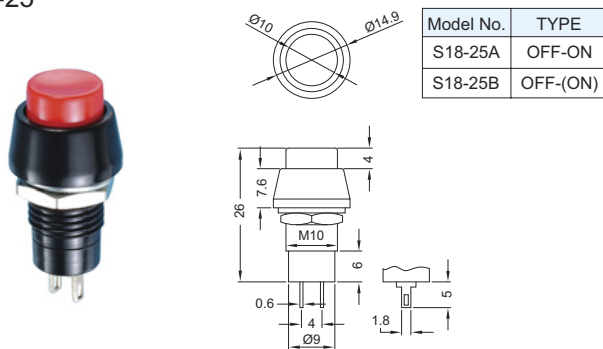


1A 125V AC

R18-36A

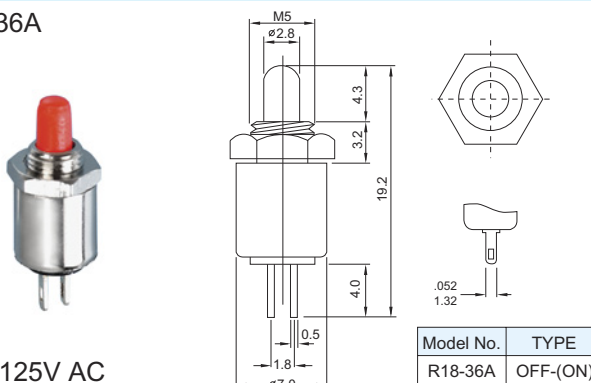


0.5A 125V AC

807 / 809

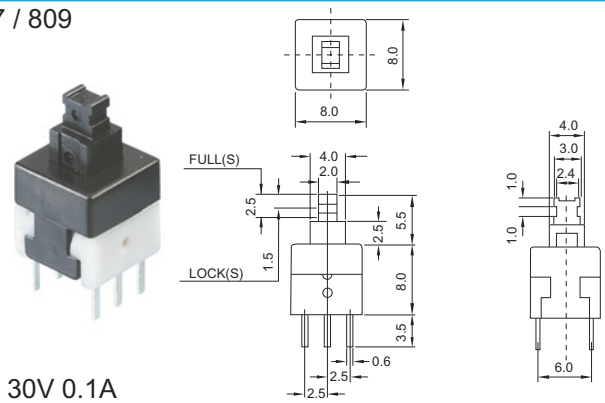


DC 30V 0.1A

807A / 809A

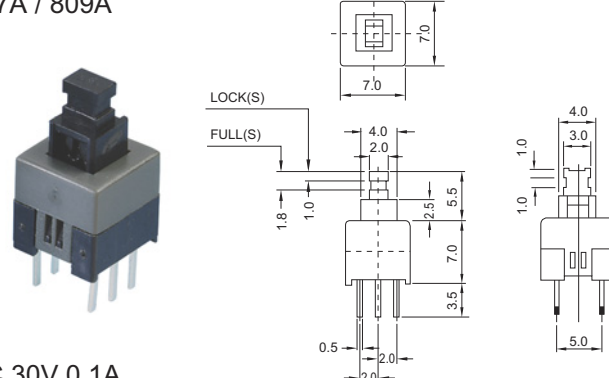


DC 30V 0.1A

807B / 809B

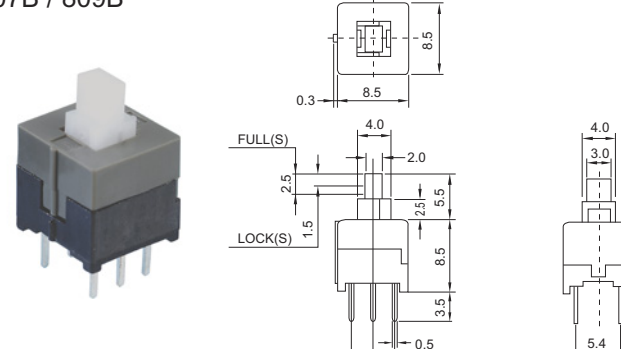

DC 30V 0.3A, DC 16V 0.5A

807C / 809C

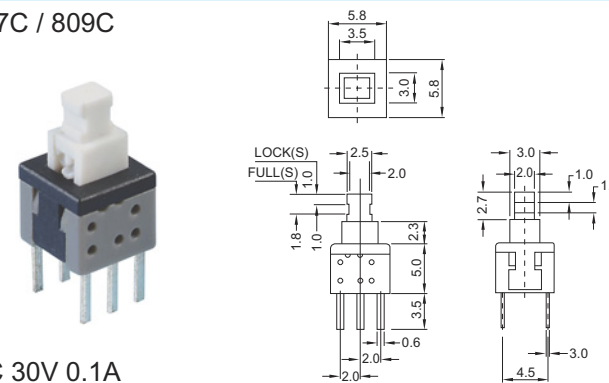

DC 30V 0.1A