
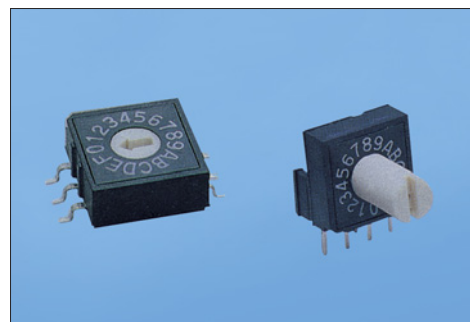


SPECIFICATIONS


CONTACT RATING: 24VDC, 25mA (switching Rating)
 50VDC, 100mA (non-switching Rating)
 ELECTRICAL LIFE: 20,000 cycles.
 CONTACT RESISTANCE: 100 mΩ max. (initial)
 INSULATION RESISTANCE: 100 MΩ min. at 250 VDC
 DIELECTRIC STRENGTH: 250 VAC / 1 minute

OPERATION FORCE: 400gf.cm max
 OPERATING TEMPERATURE: -25°C to +80°C
 STORAGE TEMPERATURE: -40°C to 85°C
 SOLDERABILITY: 260±5°C, 5±1 sec.
 SOLDER RESISTANCE: Automatic Soldering

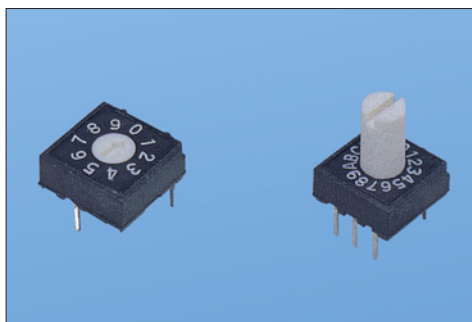


DIMENSIONS


RH3

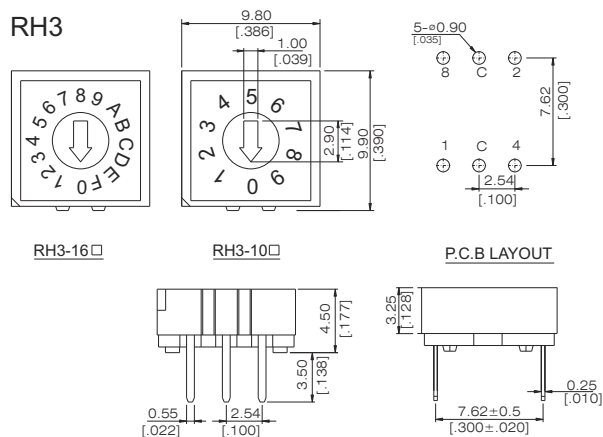

RV3

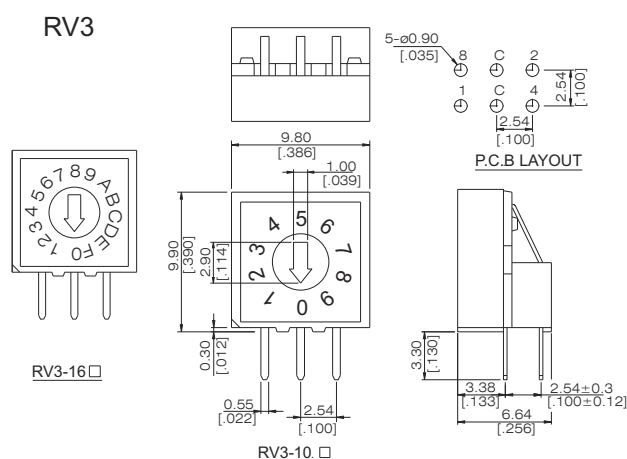

RM3

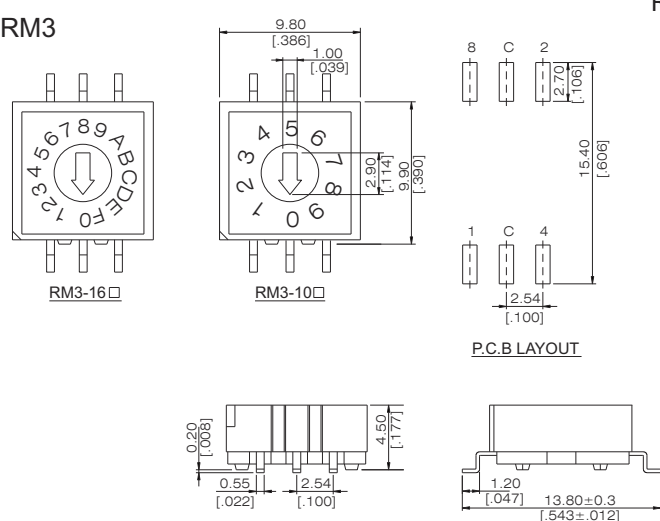

HOW TO ORDER

R ☐ ☐ ☐ ☐ F - ☐ ☐ ☐ ☐ - ☐ ☐ ☐ ☐

RoHS code
 H = RoHS Compliant

Package Style:
 B = Tube Package
 T/R = Tape & Reel
 (Only for S.M.T)

R = Real Codes.
 C = printing reverse
 (Only 16 Steps.)

Number Of Steps:
 10 = 10 Steps.
 16 = 16 Steps.

F = Higher Force

Solder Plating
 A = Terminal Gold Plating

☐ = Recessed Actuator
 H = Actuator 7.3mm
 M = Actuator 3.2mm

Number of Terminals
 4 = 4x1
 3 = 3x3
 2 = 3x2

Termination Type
 H = Through Hole
 V = Right Angle
 M = S.M.T