



SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

PAPT NO	TC-1103-X-X
Operating Force	B: 160gfC: 260gf
Height	Code-X

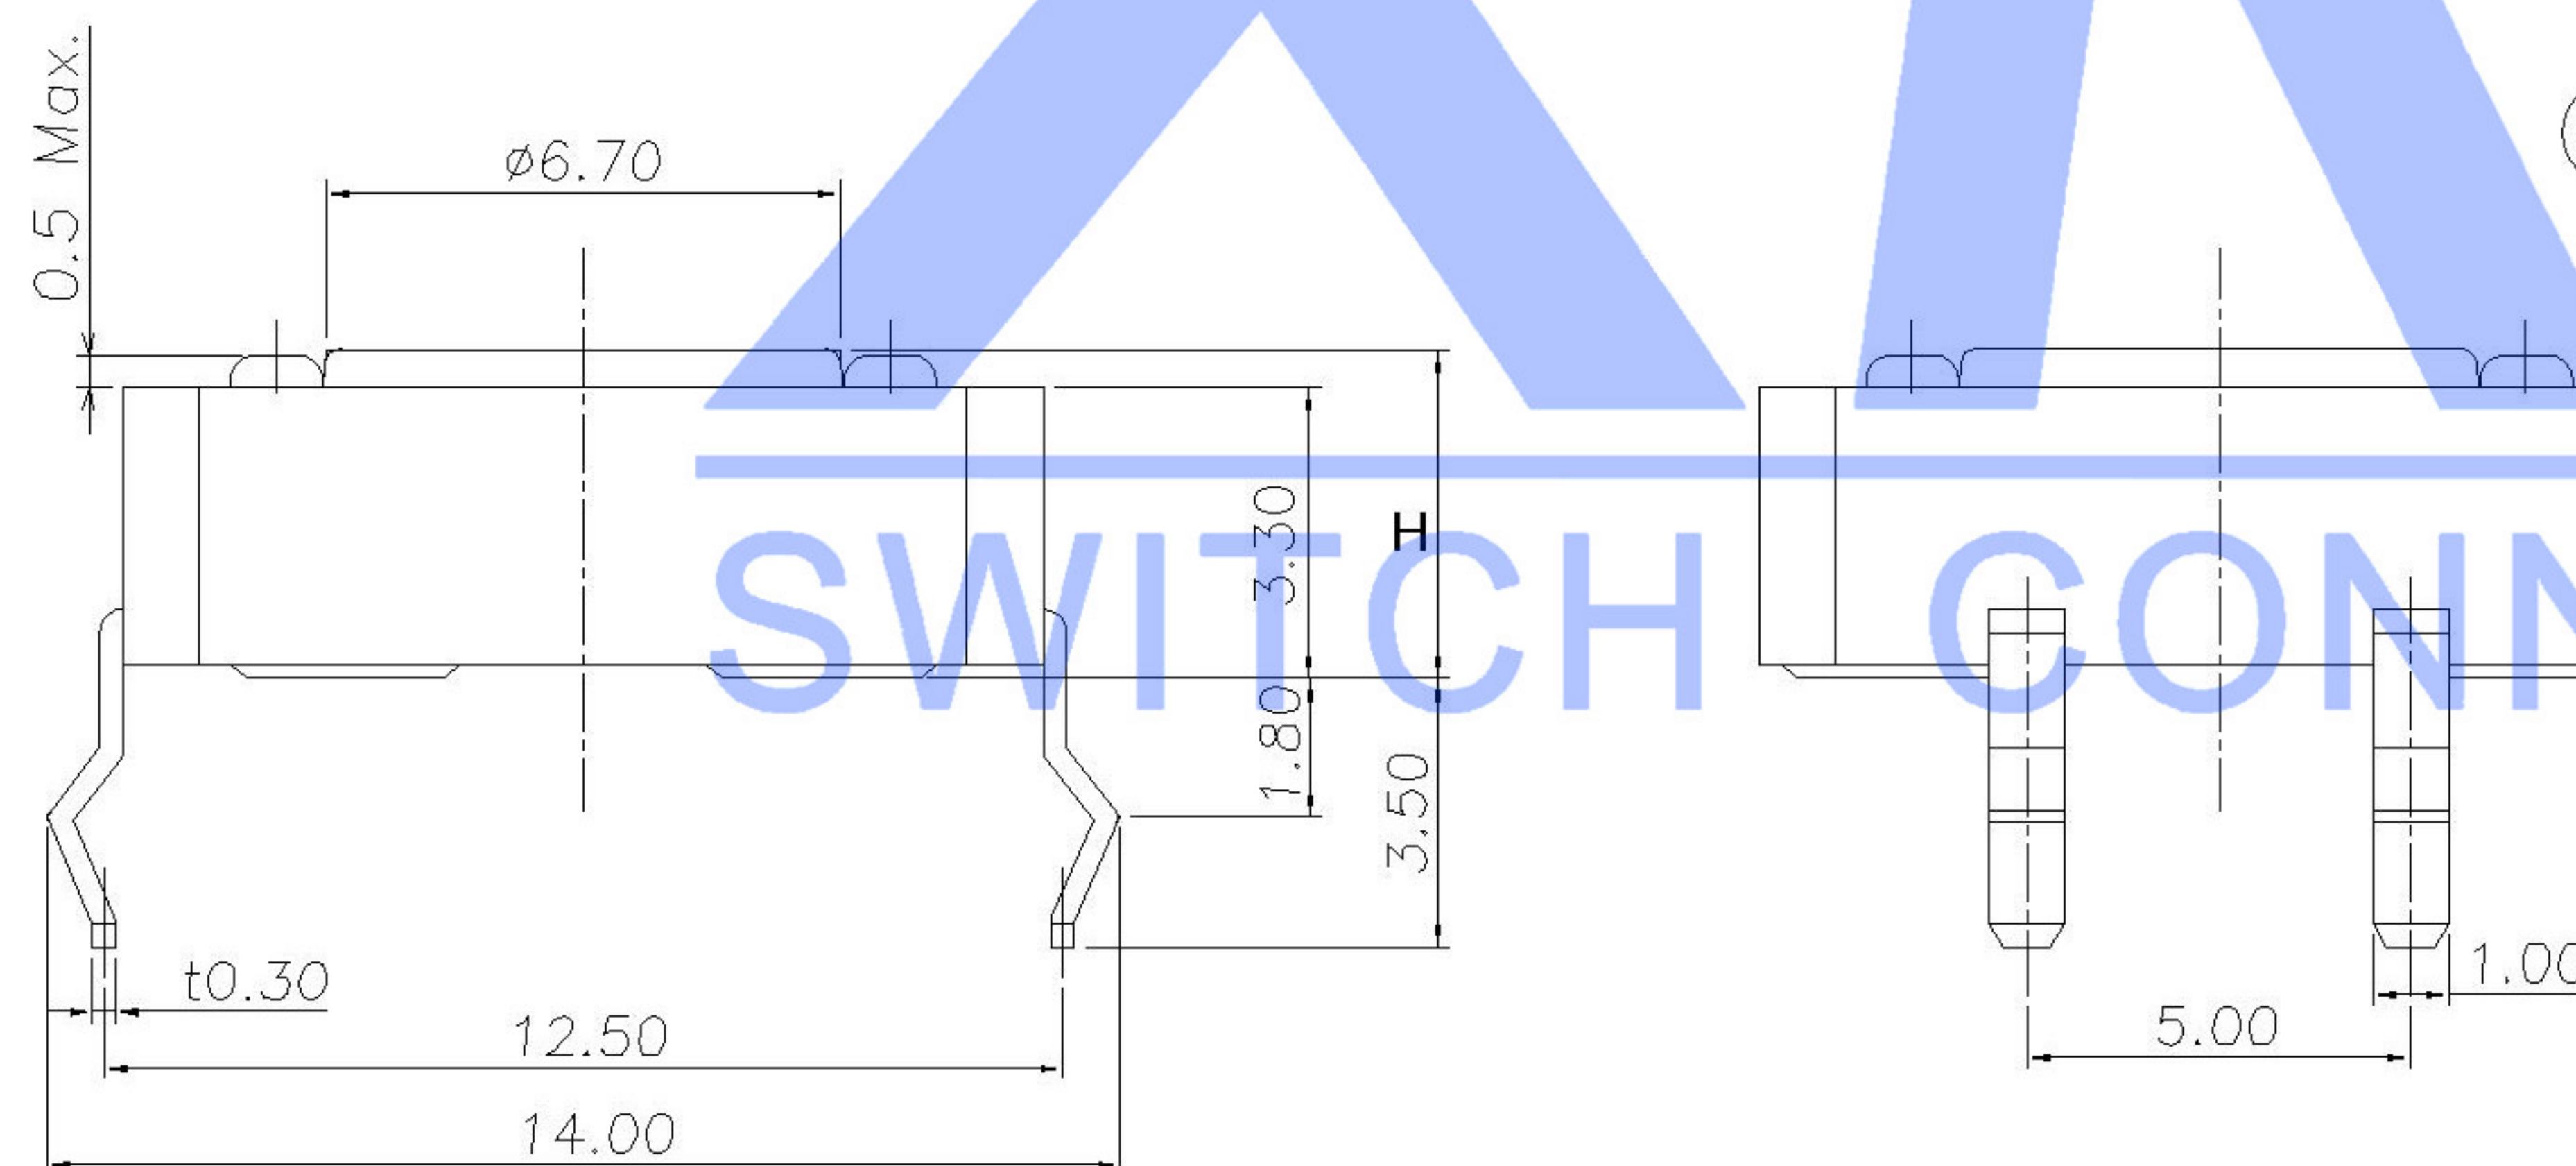

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.: TC-1103		
△X					L ≤ 4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.: TC-1103-X-X		
△X					4 < L ≤ 16	±0.3								
△X					16 < L ≤ 63	±0.4								
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5	APPD		DATE		SIZE: A4			
REVISIONS					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
www.xk-dg.cn www.1k0k.com www.1k0k.cn												1.0g	1/1	A0