
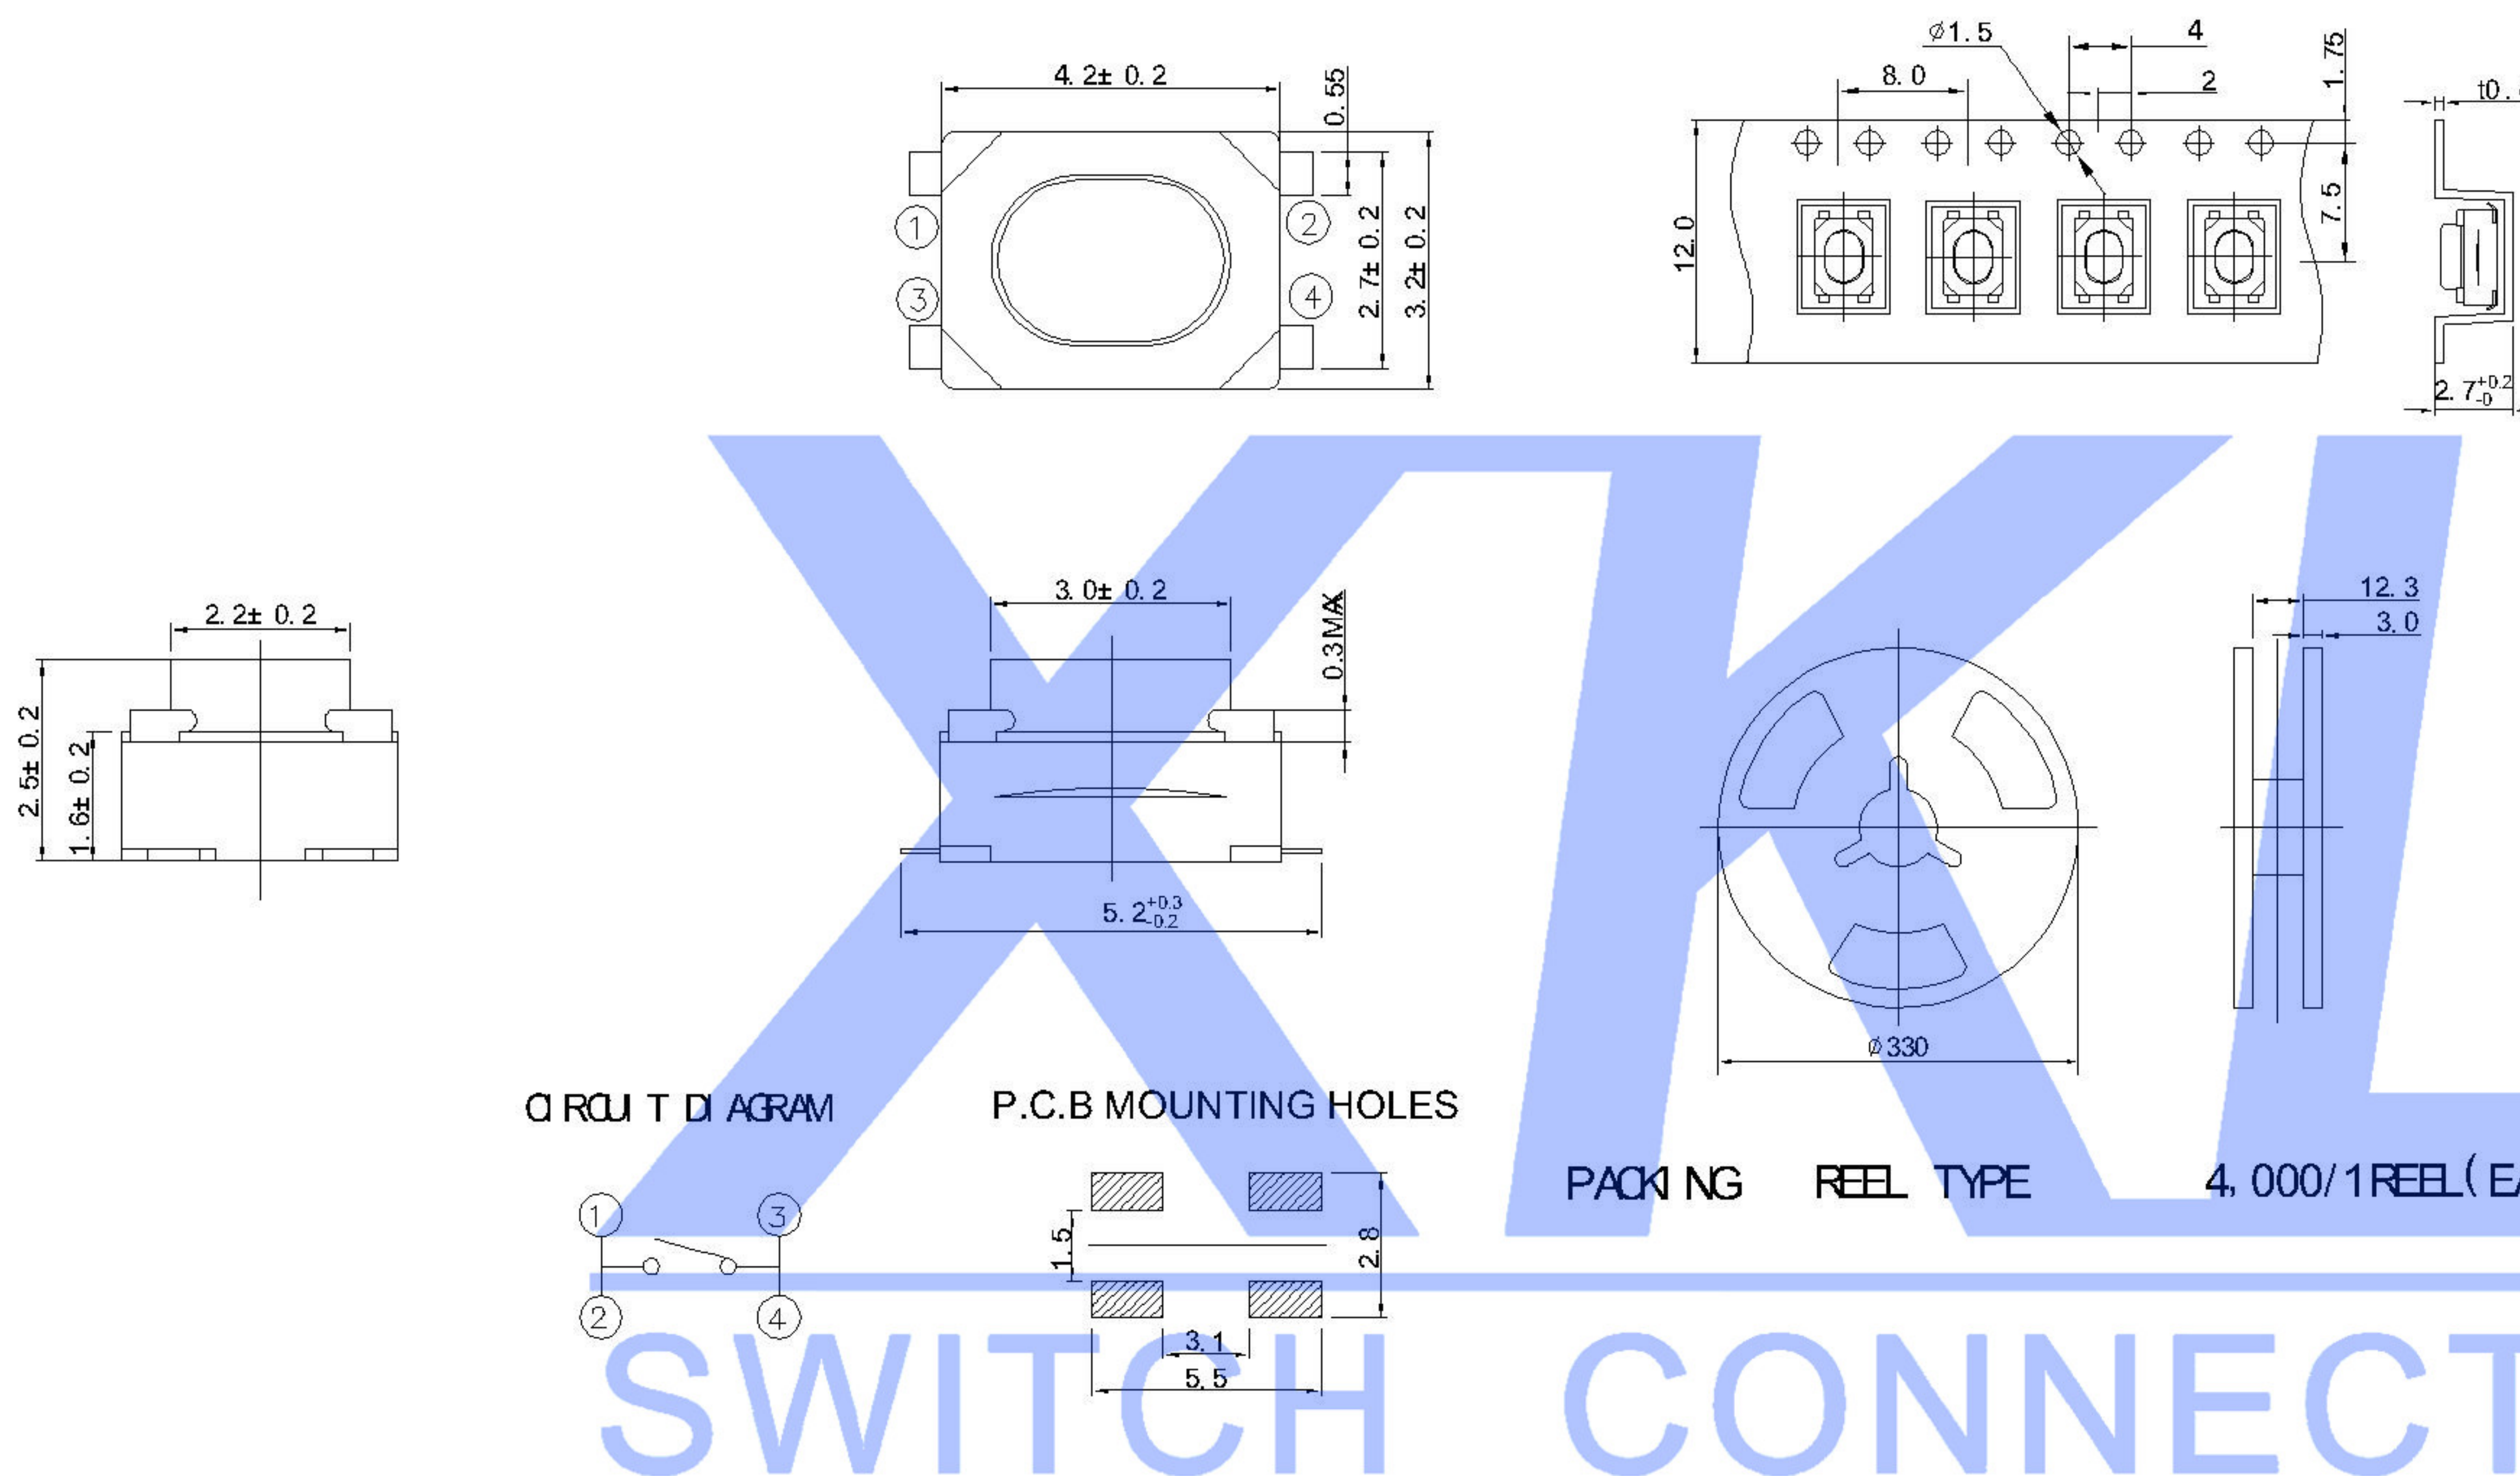


Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.20 mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

PAPT NO	TS-1145A-X-X
Operating Force	A:100gf B:160gf C:260gf
Height	H: 2. 5
Keystake	A:PA46: B: Silica gel



⑤	Terminal	—	4	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	LCP		—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PA46/Silica gel		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

ITEM		PART NAME		PERKS	QTY	MATERIAL	FINISHING	REMARK
DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH			
DWN		DATE		VIEW: 				
CHKD		DATE		UNIT: mm	PART NO.:			
APPD		DATE		SIZE: A4				
KKB INDUSTRIAL PRECISION CO.,LIMITED					DWG NO.:			
					TS-1145A-X-X			
					WEIGHT	SHEET	REVISION	
					1.0g	1/1	A0	