


PCB SOLDER LAND DIMENSIONS

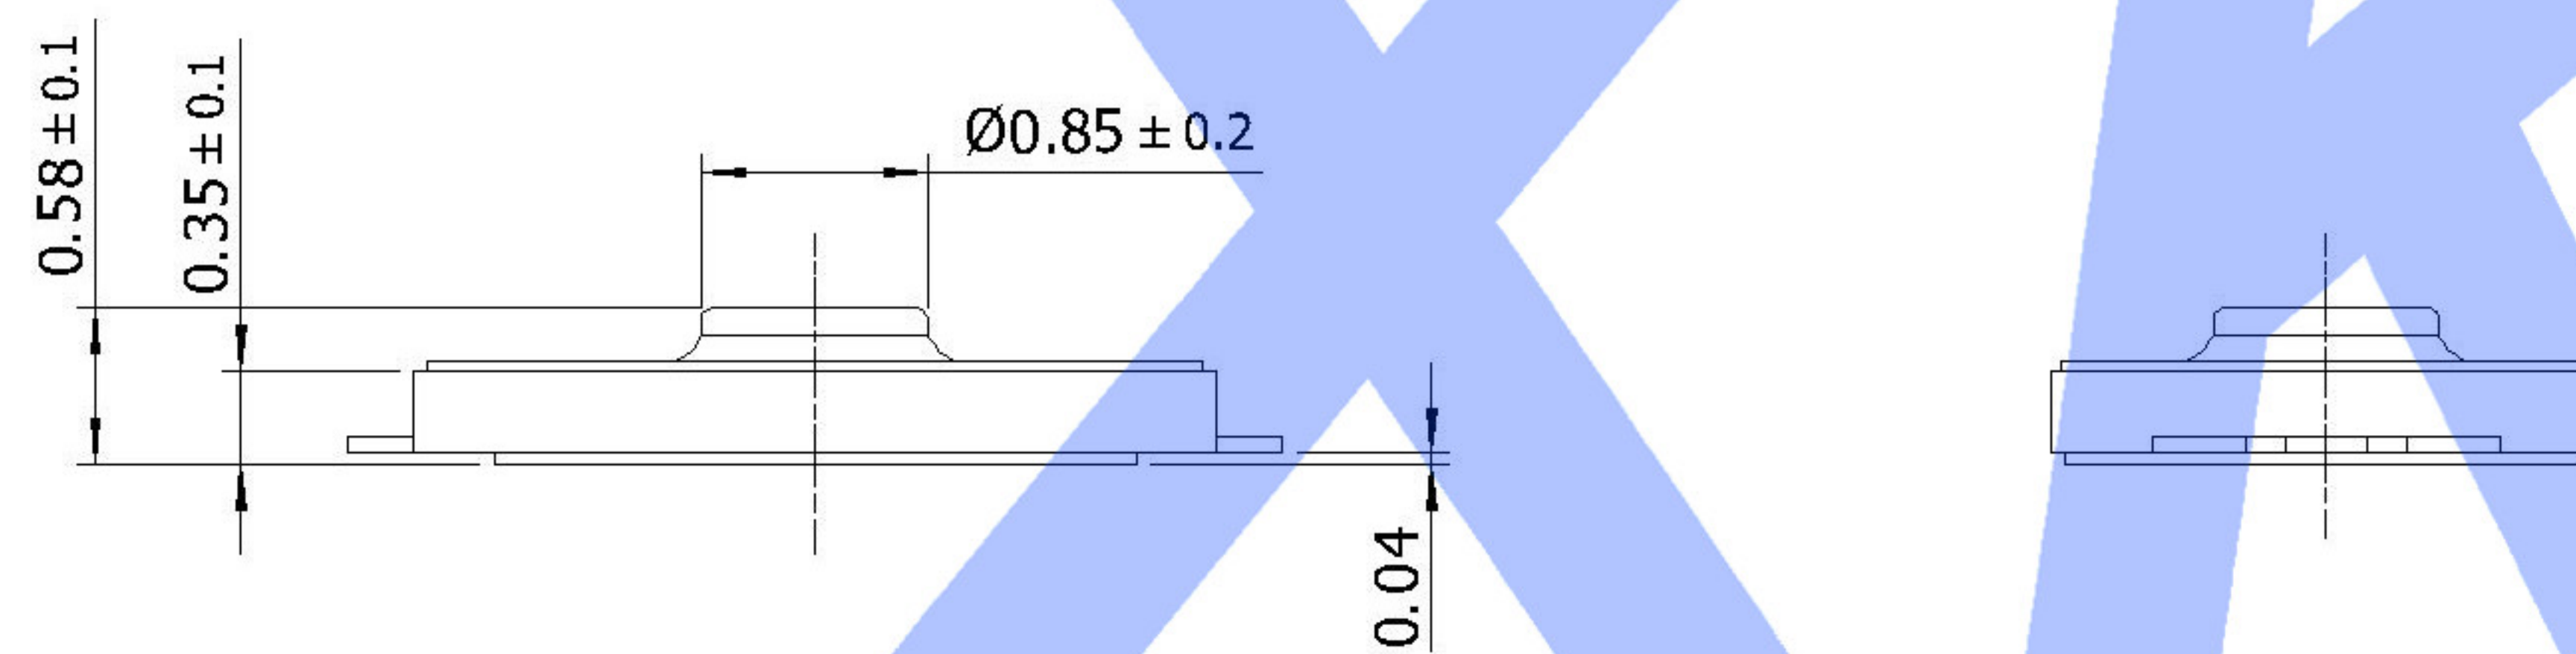


CIRCUIT DIAGRAM

SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.13±0.05mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

PAPT NO	TS-2030-2-X
Operating Force	B: 160gf C: 260gf
Height	H: 0.58

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	LCP		—
②	Cover	—	1	kapton filmPI	Tin plated	—
①	Keystake	—	1	PET		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH			
					units: mm	DWN		DATE		VIEW: 	PART NO.:			
△ X					tolerance:	CHKD		DATE		UNIT: mm	DWG NO.:			
△ X					X.X ±0.2mm						TS-2030-2-X			
△ X					X.XX ±0.1mm	APPD		DATE		SIZE: A4				
MARK	DESCRIPTION		DATE	REVISED	APPROVED	X.XXX ±0.05mm								
REVISIONS						UNSPECIFIED TOLERANCES								
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn						XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g	SHEET 1/1	REVISION A0	