



SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

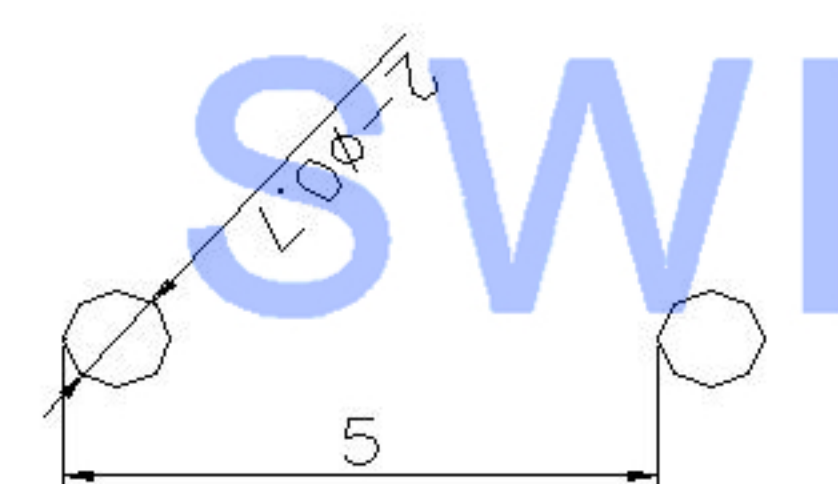

PCB WELDING DRAWING

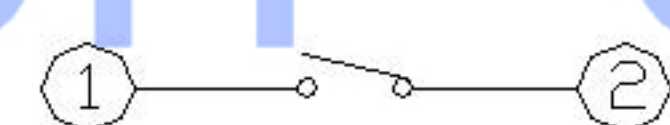


CIRCUIT DIAGRAM

Code-X	H
A	4.3
B	4.8
C	5.0
D	5.3
E	5.5
F	6.0

PAPT NO	TC-1101DE-X-X
Operating Force	B:160gf C:260gf
Height	Code-X

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PA46	Natural	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PA46		—

ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK
------	-----------	--------	-----	----------	-----------	--------

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
△x					tolerance:			DATE		UNIT: mm	DWG NO.:		
△x					X.X ±0.2mm	CHKD		DATE			TC-1101DE-X-X		
△x					X.XX ±0.1mm								
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm	APPD		DATE		SIZE: A4			
REVISIONS					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn											1.0g	1/1	A0