



Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

PAPT NO	TS-1101VS-X-X-X
Operating Force	A: 100gf B: 160gf C: 260gf
Height	H: 3. 5
Fixed column	A:With B:without
Keystake	A: PA46 B: Silica gel

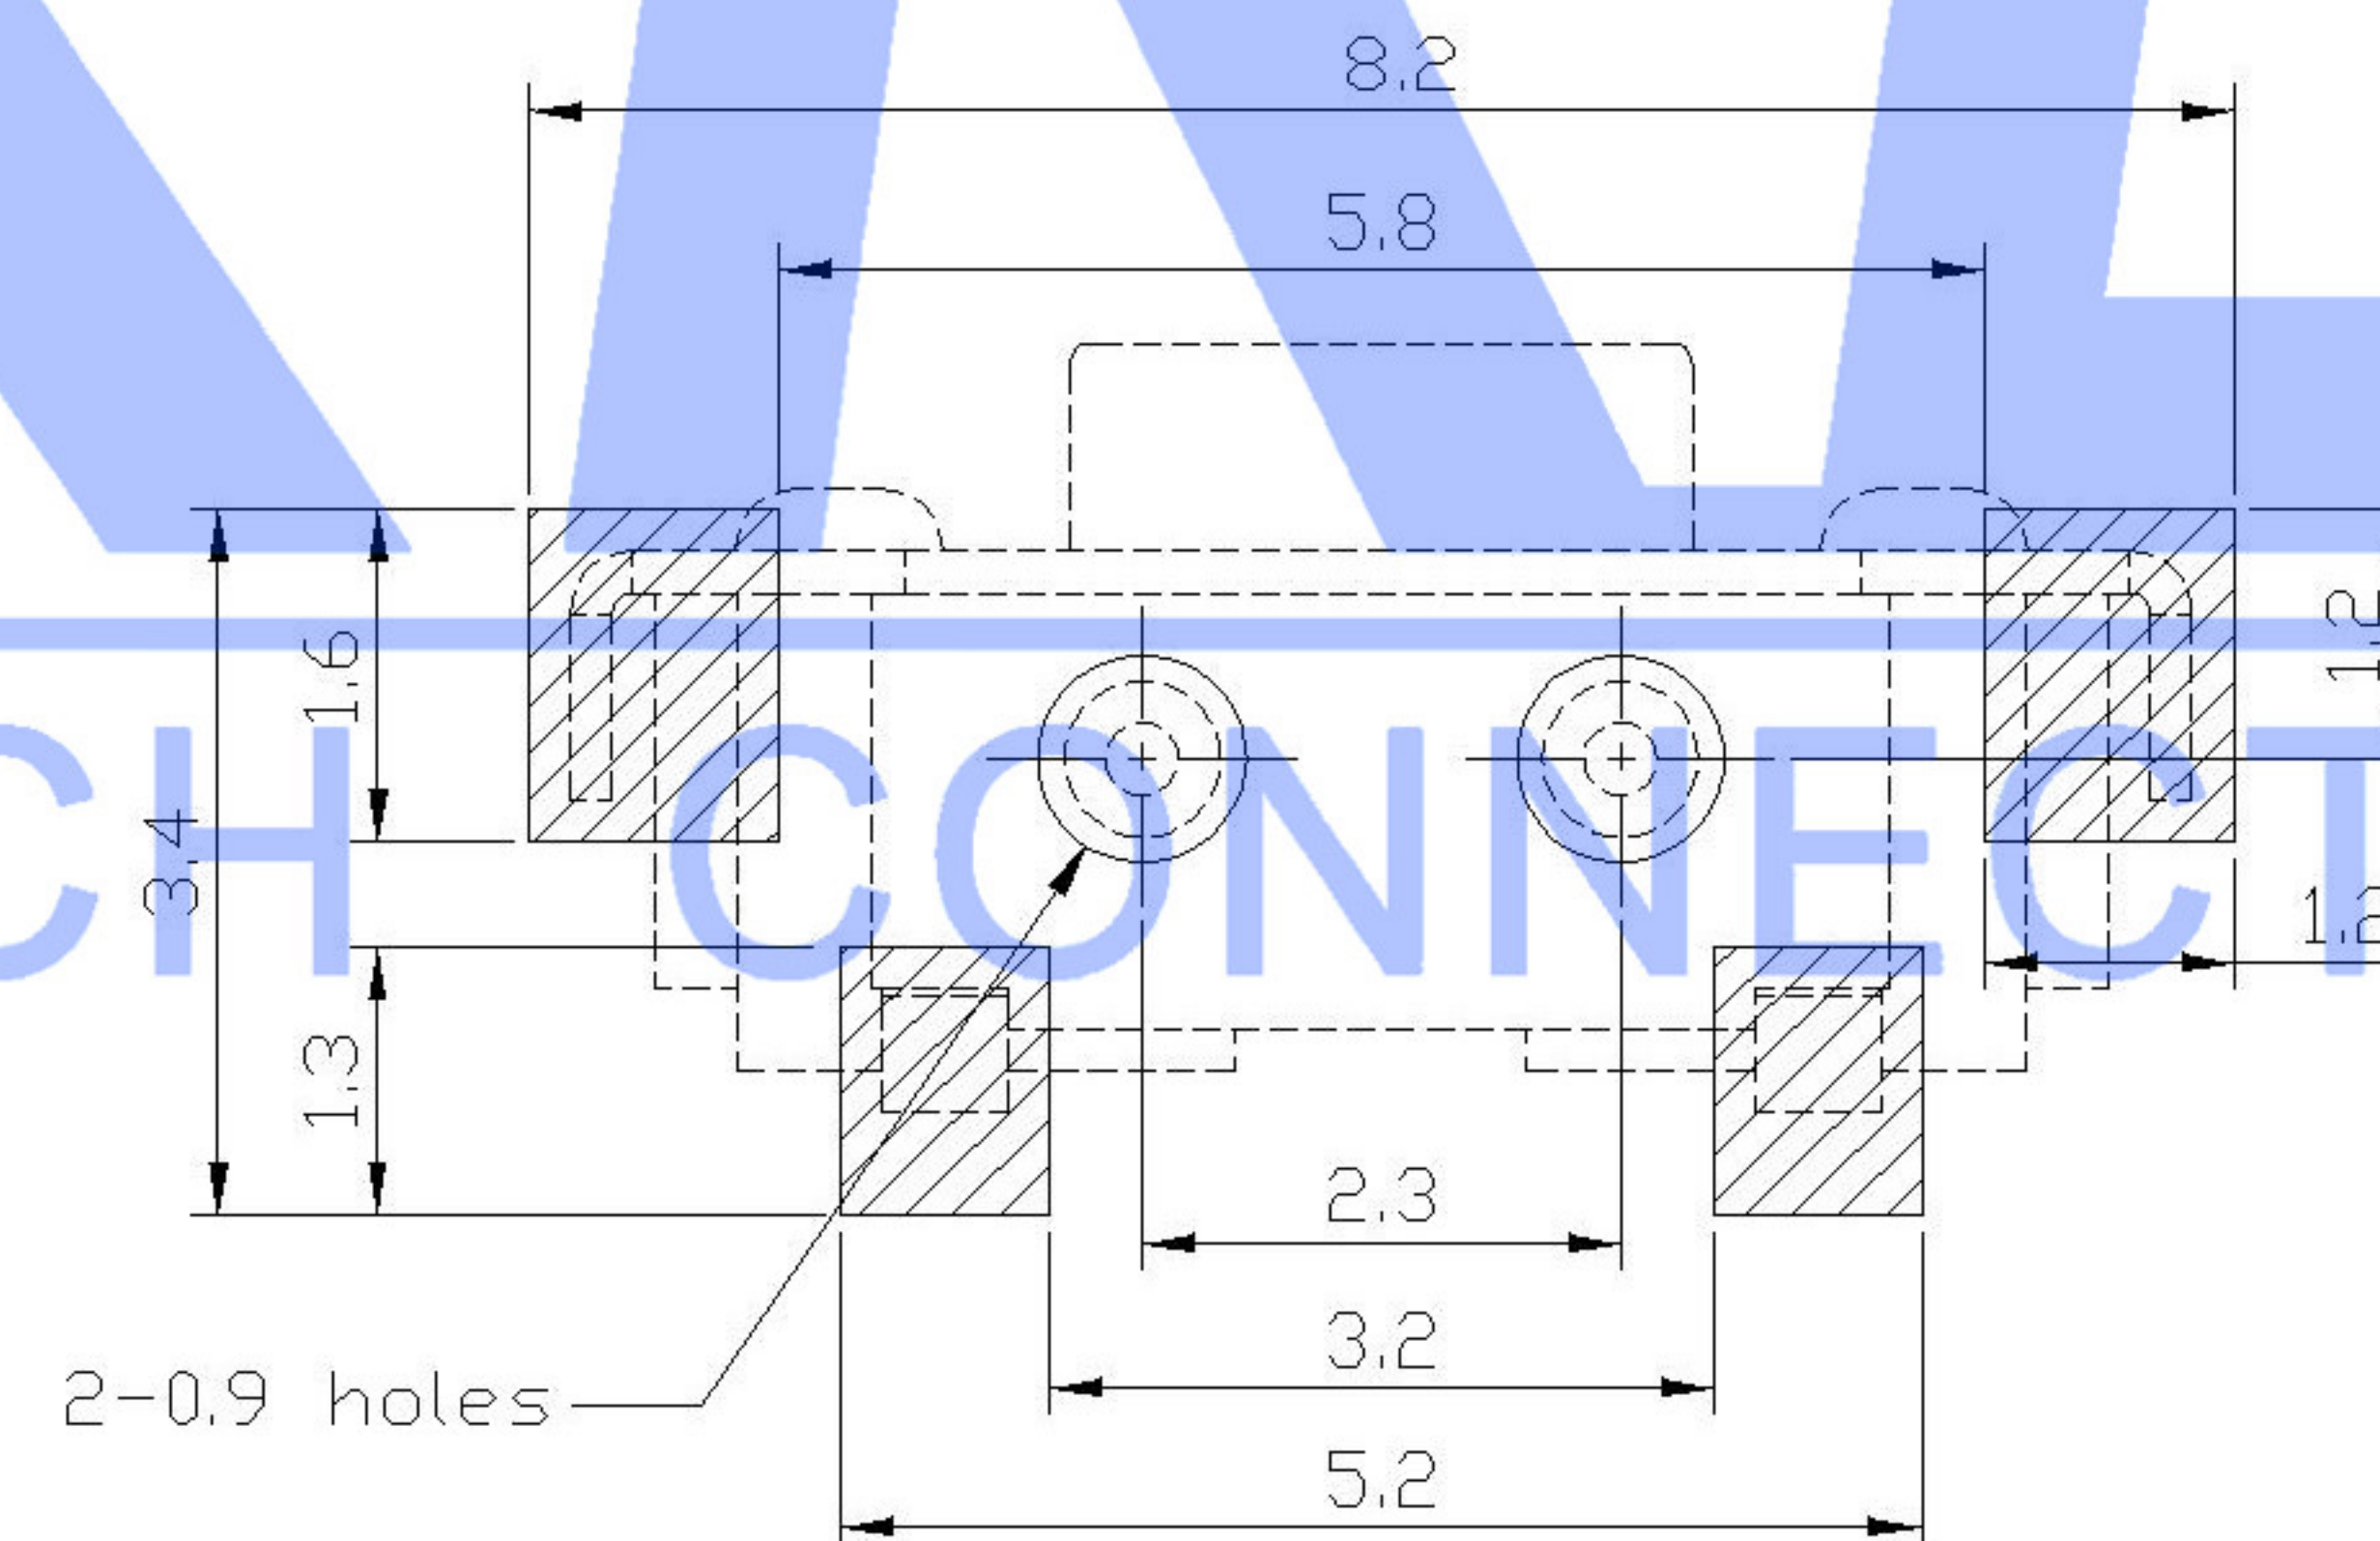

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PA46		—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PA46		—
ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
△ X					tolerance:								
△ X					X.X	±0.2mm	CHKD		DATE	UNIT: mm	DWG NO.:		
△ X					X.XX	±0.1mm					TS-1101VS-X-X-X		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX	±0.05mm	APPD		DATE	SIZE: A4			
					REVISIONS								
					UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT 1.0g	SHEET 1/1	REVISION A0
					www.xk-dg.cn www.helloxkb.com www.helloxkb.cn								