
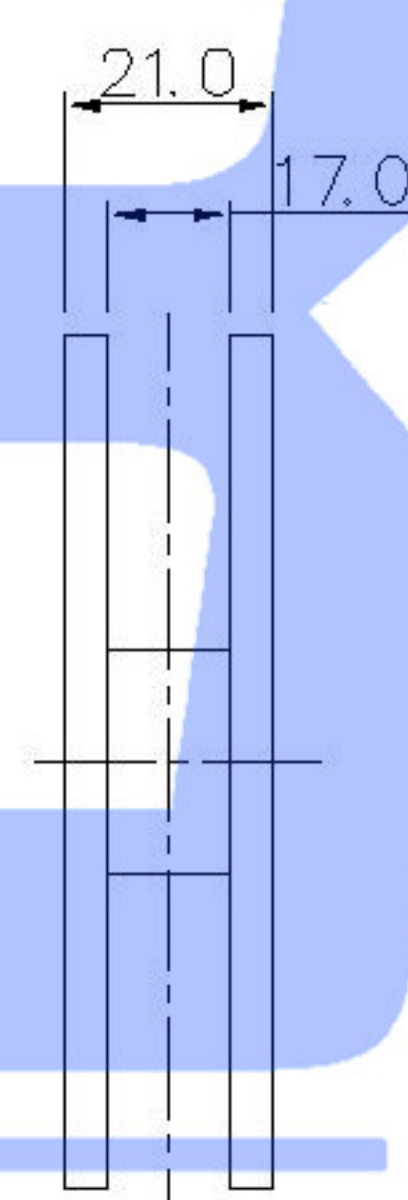
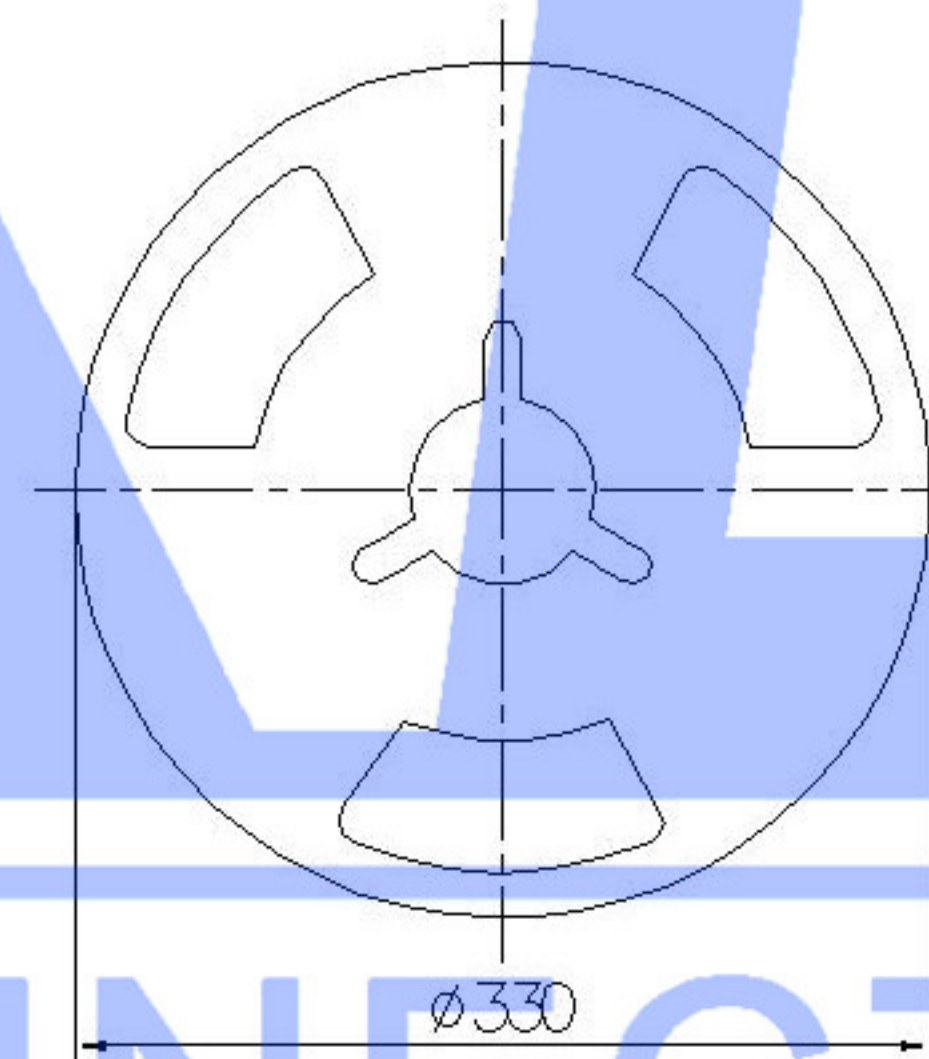


A

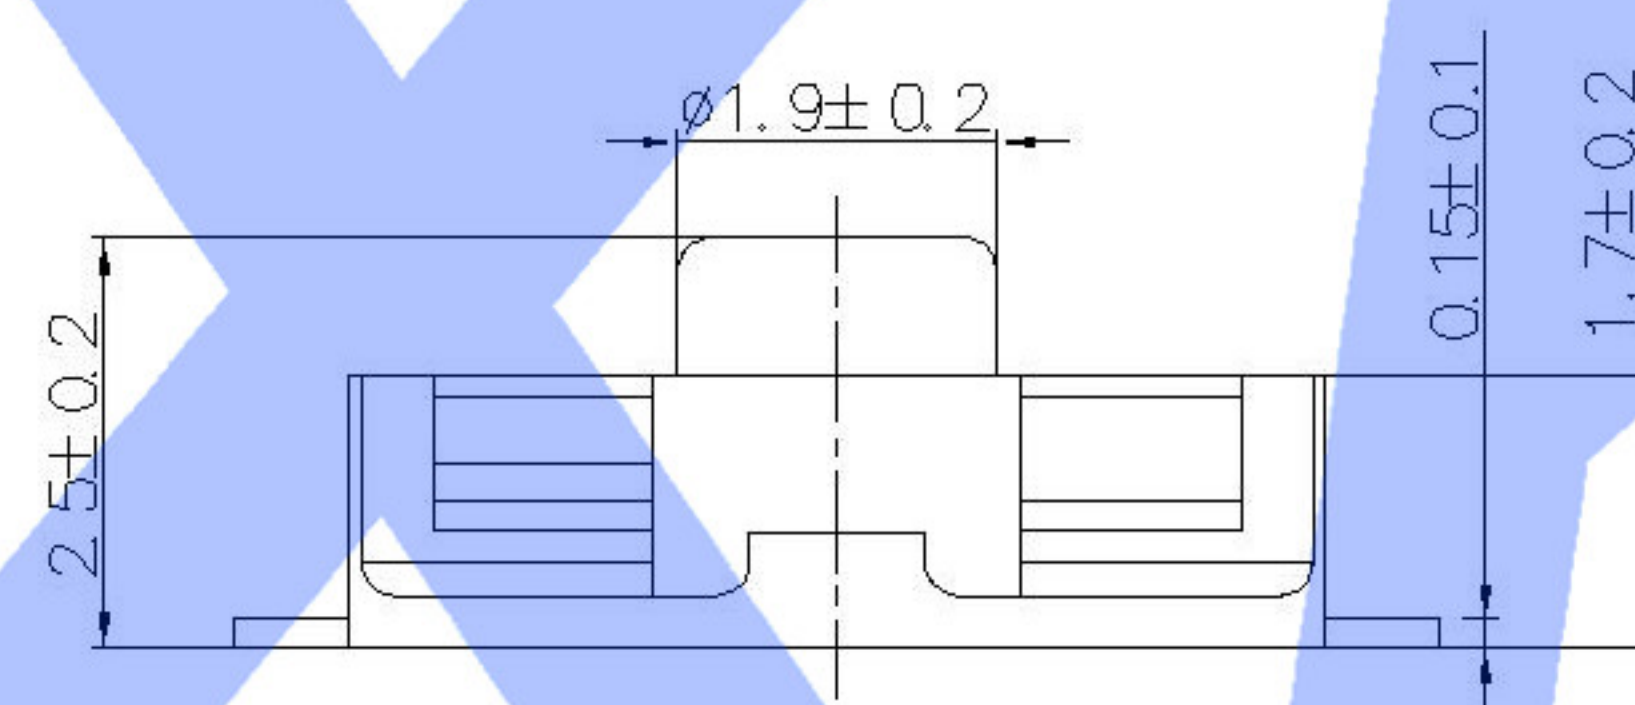

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C


PAPT NO	TS-1105G-X-X-B
Operating Force	A:100gf B:160gf C:260gf
Height	H:2.5
color	B:black BL:blue
line	A: Normally open B:Normally closed

P.C.B MOUNTING HOLES

SWITCH CONNECTOR

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PA46		—
②	Cover	—	1	SUS	Tin plated	—
①	Keystake	—	1	Silica gel		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

					units:	mm
Δx					tolerance:	
Δx					X.X	$\pm 0.2\text{mm}$
Δx					X.XX	$\pm 0.1\text{mm}$
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX	$\pm 0.05\text{mm}$
REVISIONS					UNSPECIFIED TOLERANCES	
www.xk-dq.cn www.helloxkb.com www.helloxkb.cn						

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
DWN		DATE		VIEW: 			
CHKD		DATE		UNIT: mm	PART NO.:		
APPD		DATE		SIZE: A4			
XKB INDUSTRIAL PRECISION CO.,LIMITED					DWG NO.:		
					TS-1105G-X-X-B		
					WEIGHT	SHEET	REVISION
					1.0g	1/1	A0