


PACKING REEL TYPE


SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

CIRCUIT DIAGRAM

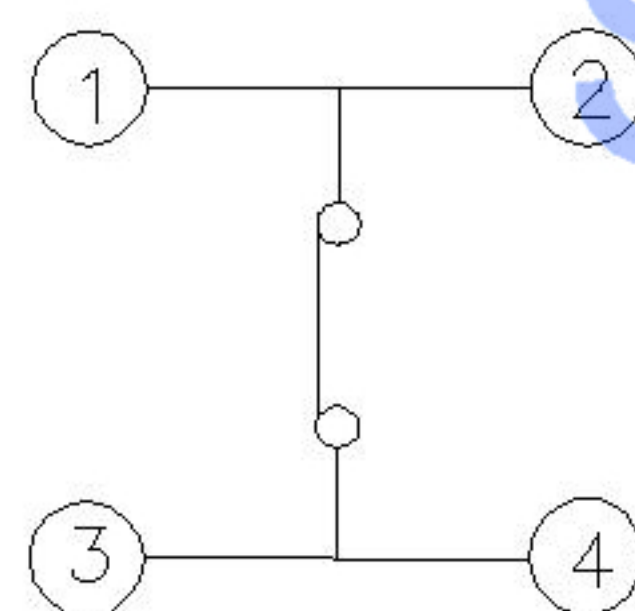


P.C.B MOUNTING HOLES

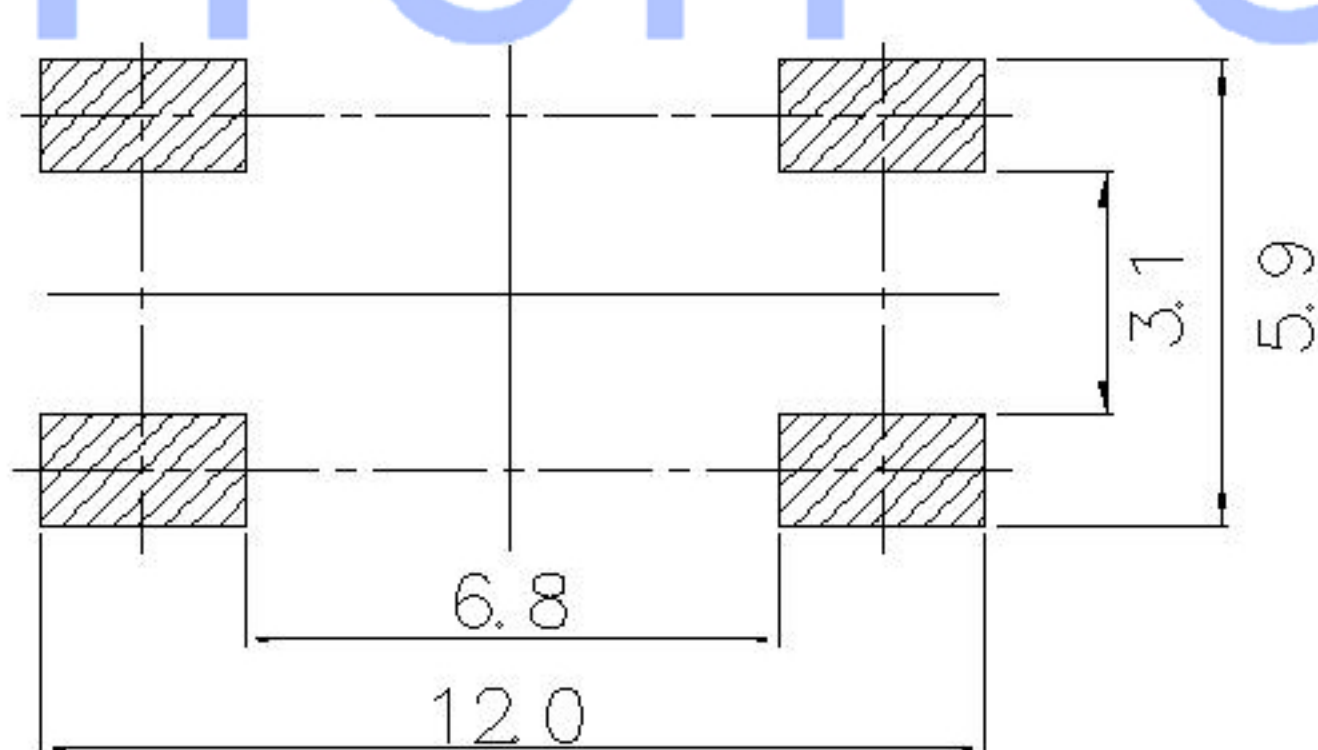

PAPT NO	TS-CB1102S-X-X
Operating Force	D: 320gf
Height	H: A: 4.3 B: 5.0

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PA46	Natural	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PA46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH		
					units:	mm	DWN		DATE		VIEW: 	PART NO.:		
△ x					tolerance:		CHKD		DATE		UNIT: mm	DWG NO.:		
△ x					X.X	±0.2mm						TS-CB1102S-X-X		
△ x					X.XX	±0.1mm								
MARK	DESCRIPTION			DATE	REVISED	APPROVED	X.XXX	±0.05mm	APPD		DATE		SIZE: A4	
REVISIONS						UNSPECIFIED TOLERANCES		XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn												1.0g	1/1	A0

					units: mm
△X					tolerance:
△X					X.X ±0.2mm
△X					X.XX ±0.1mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX ±0.05mm
REVISIONS					UNSPECIFIED TOLERANCES
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					