






IP65

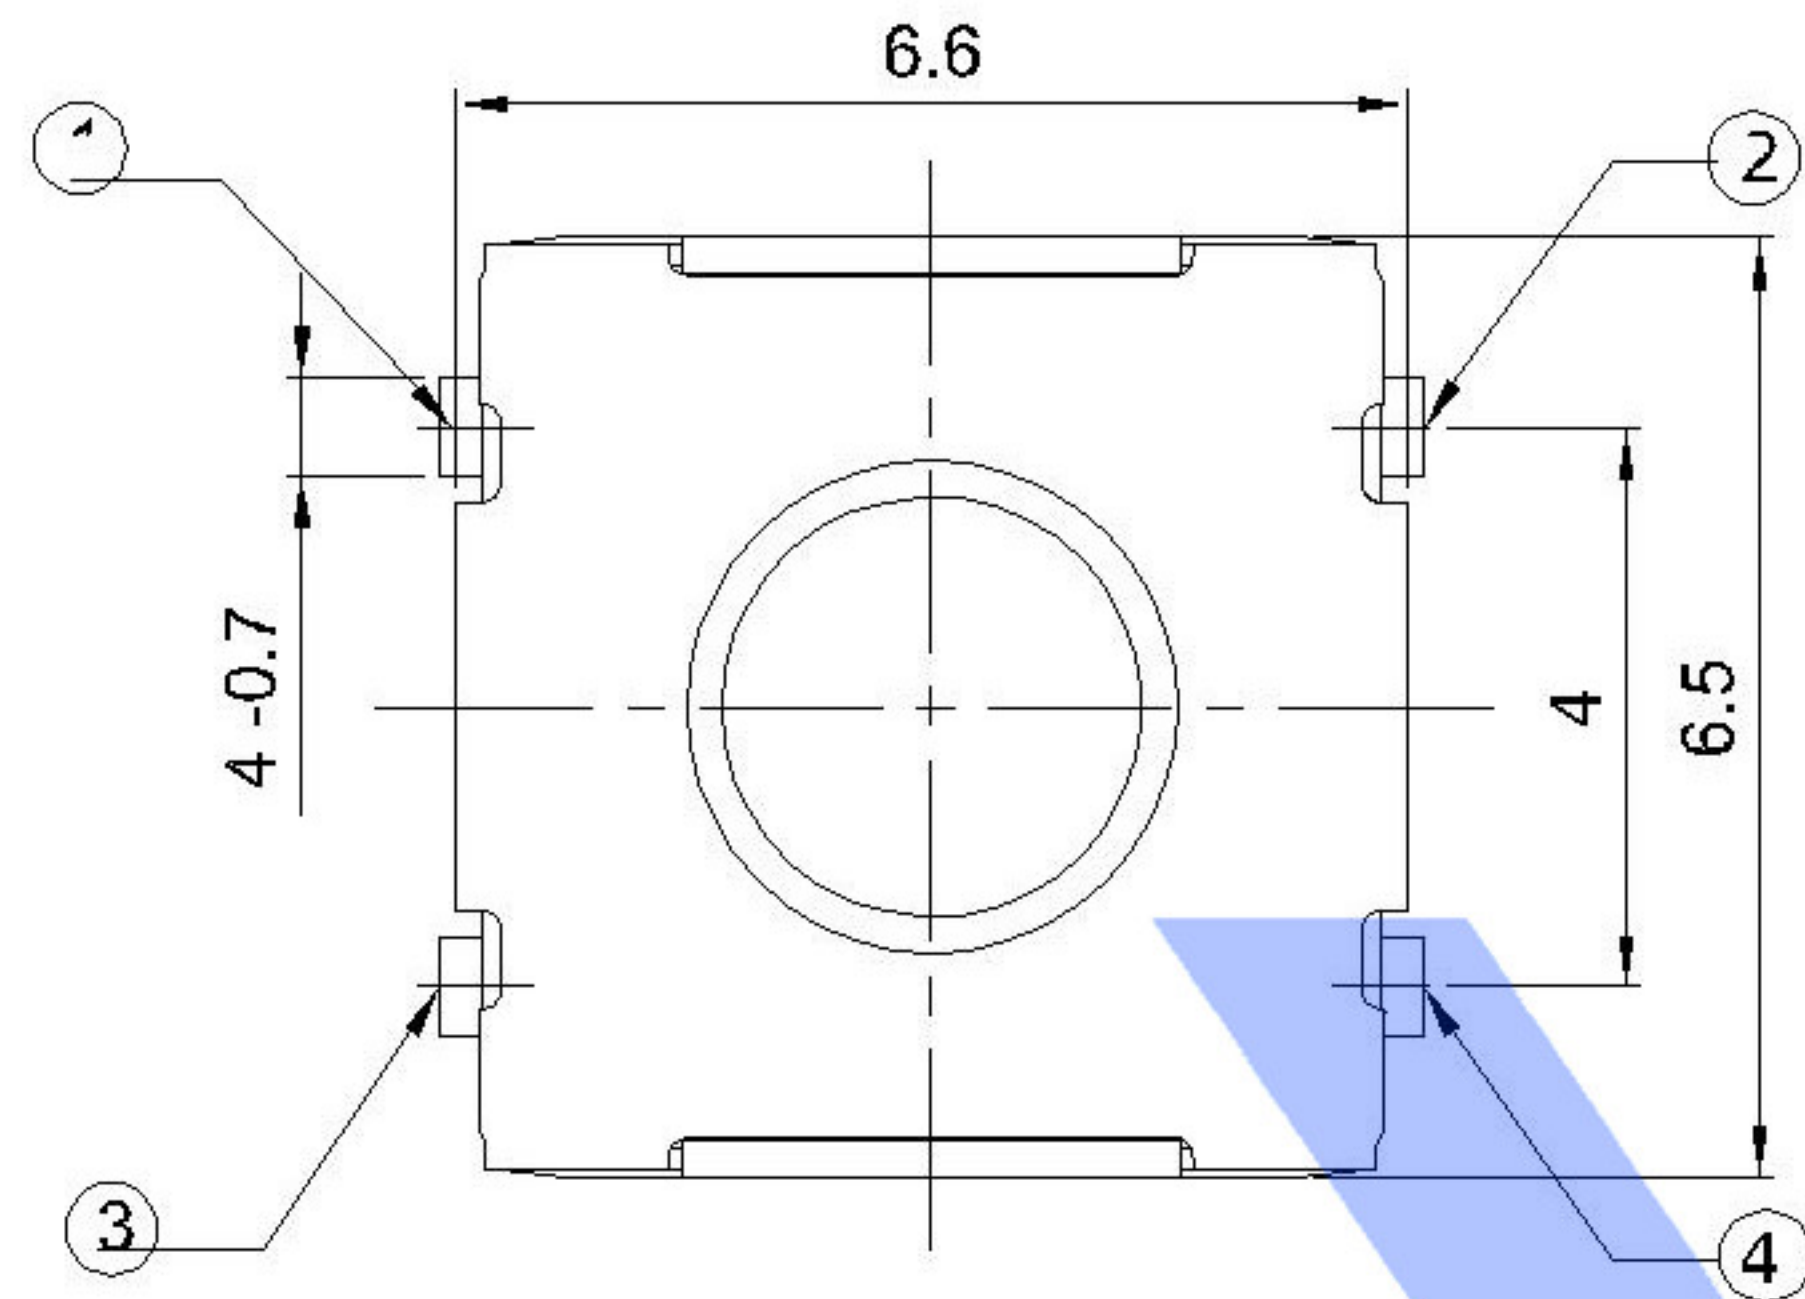

CIRCUIT DIAGRAM

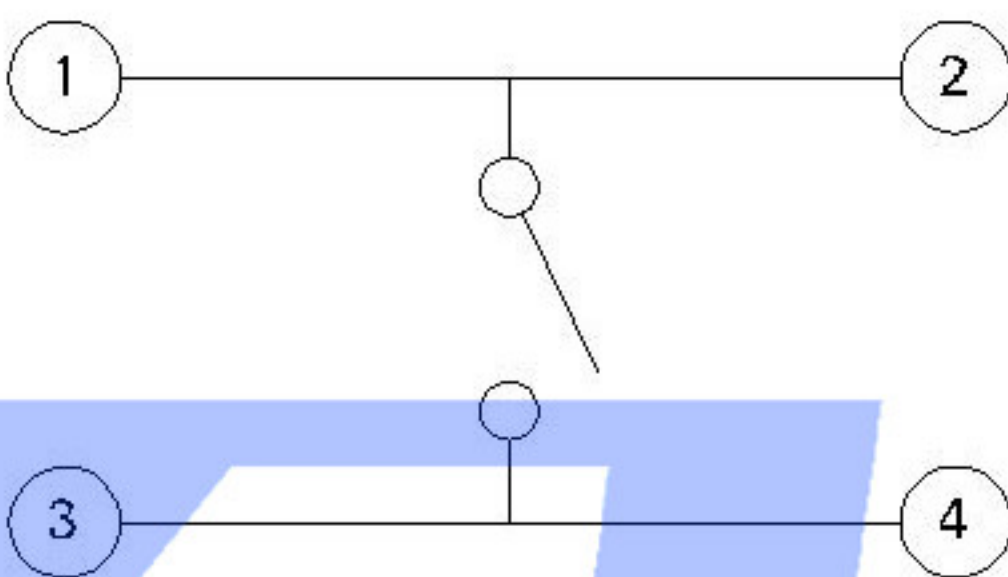

SMD REFLOW PATTERN (N/S : ±0.1)

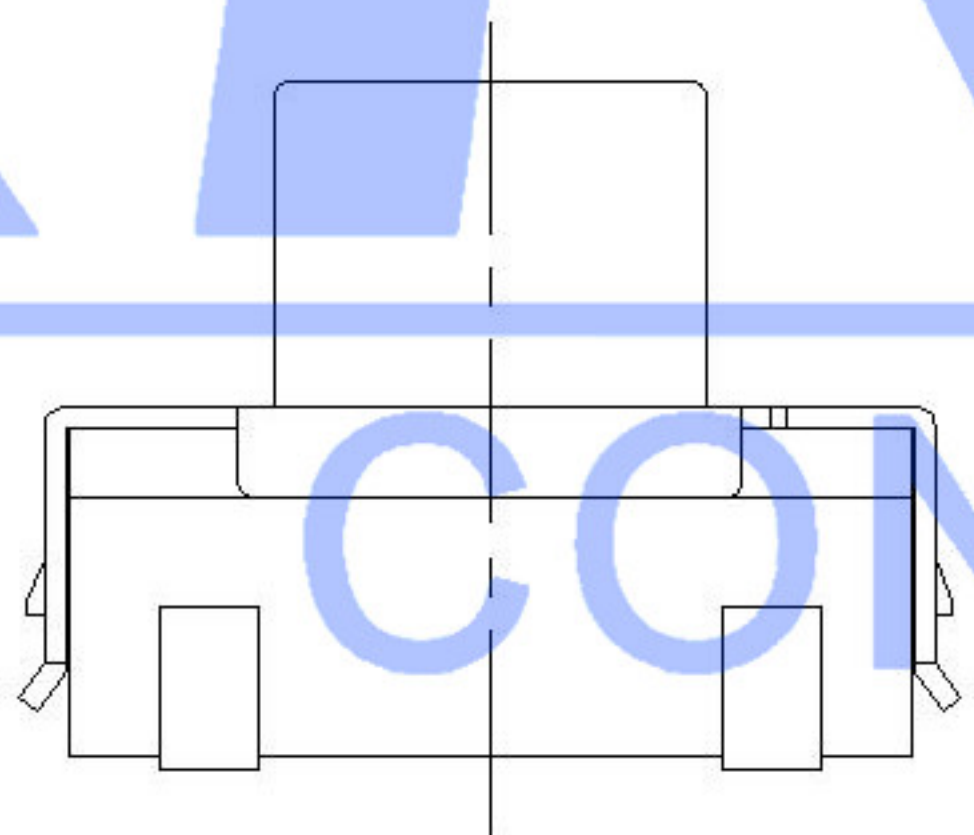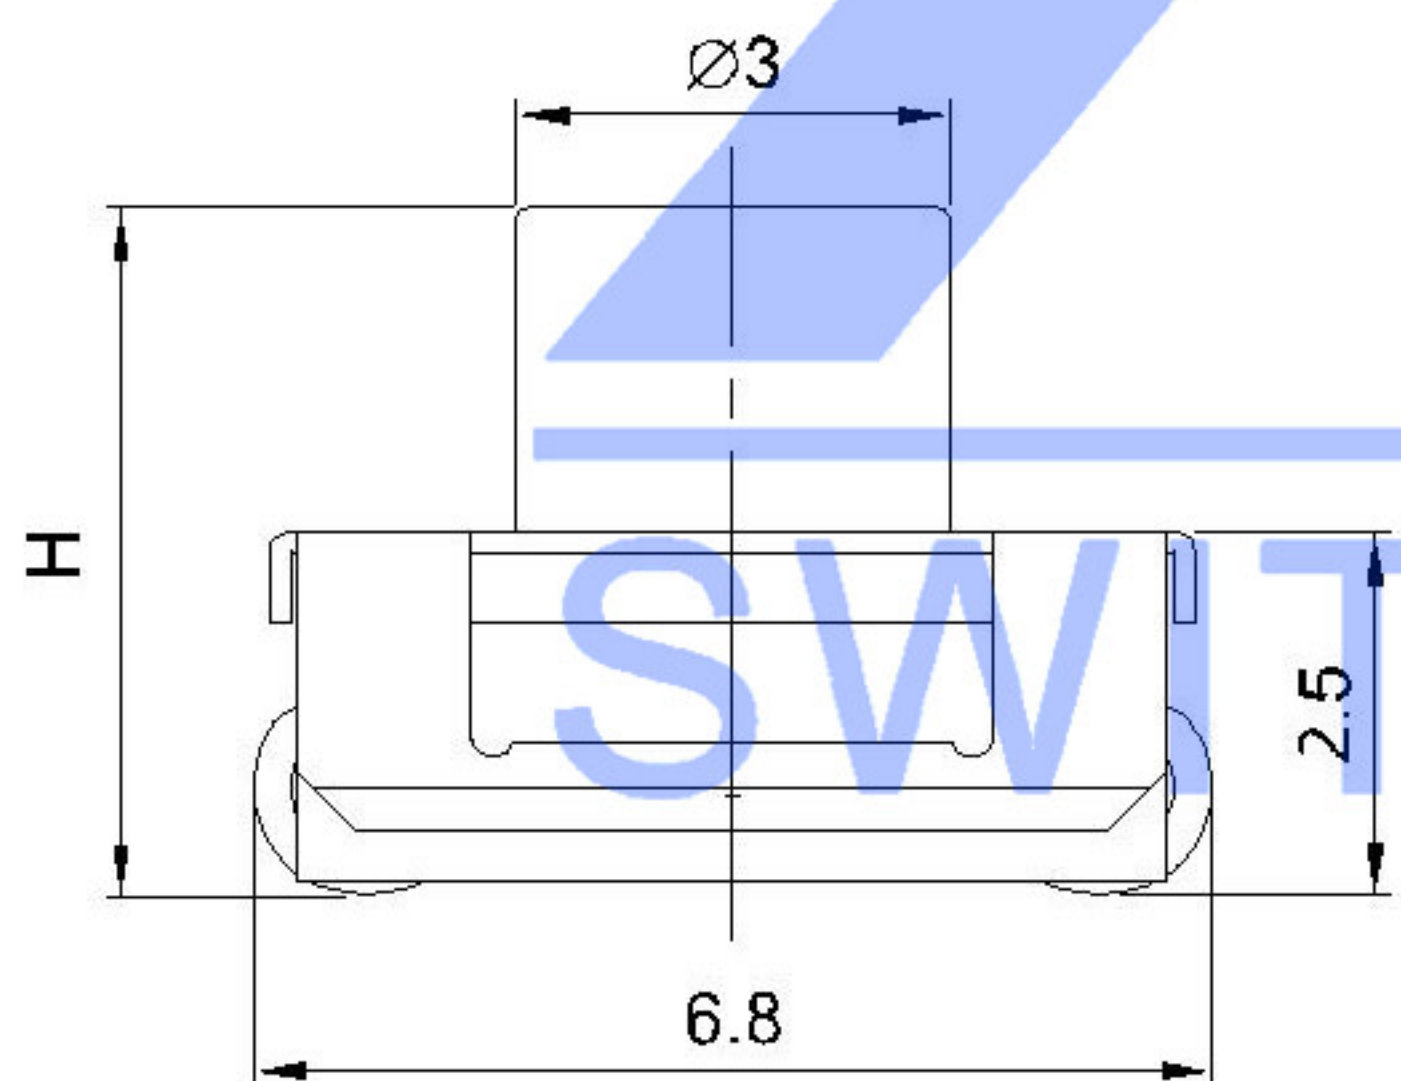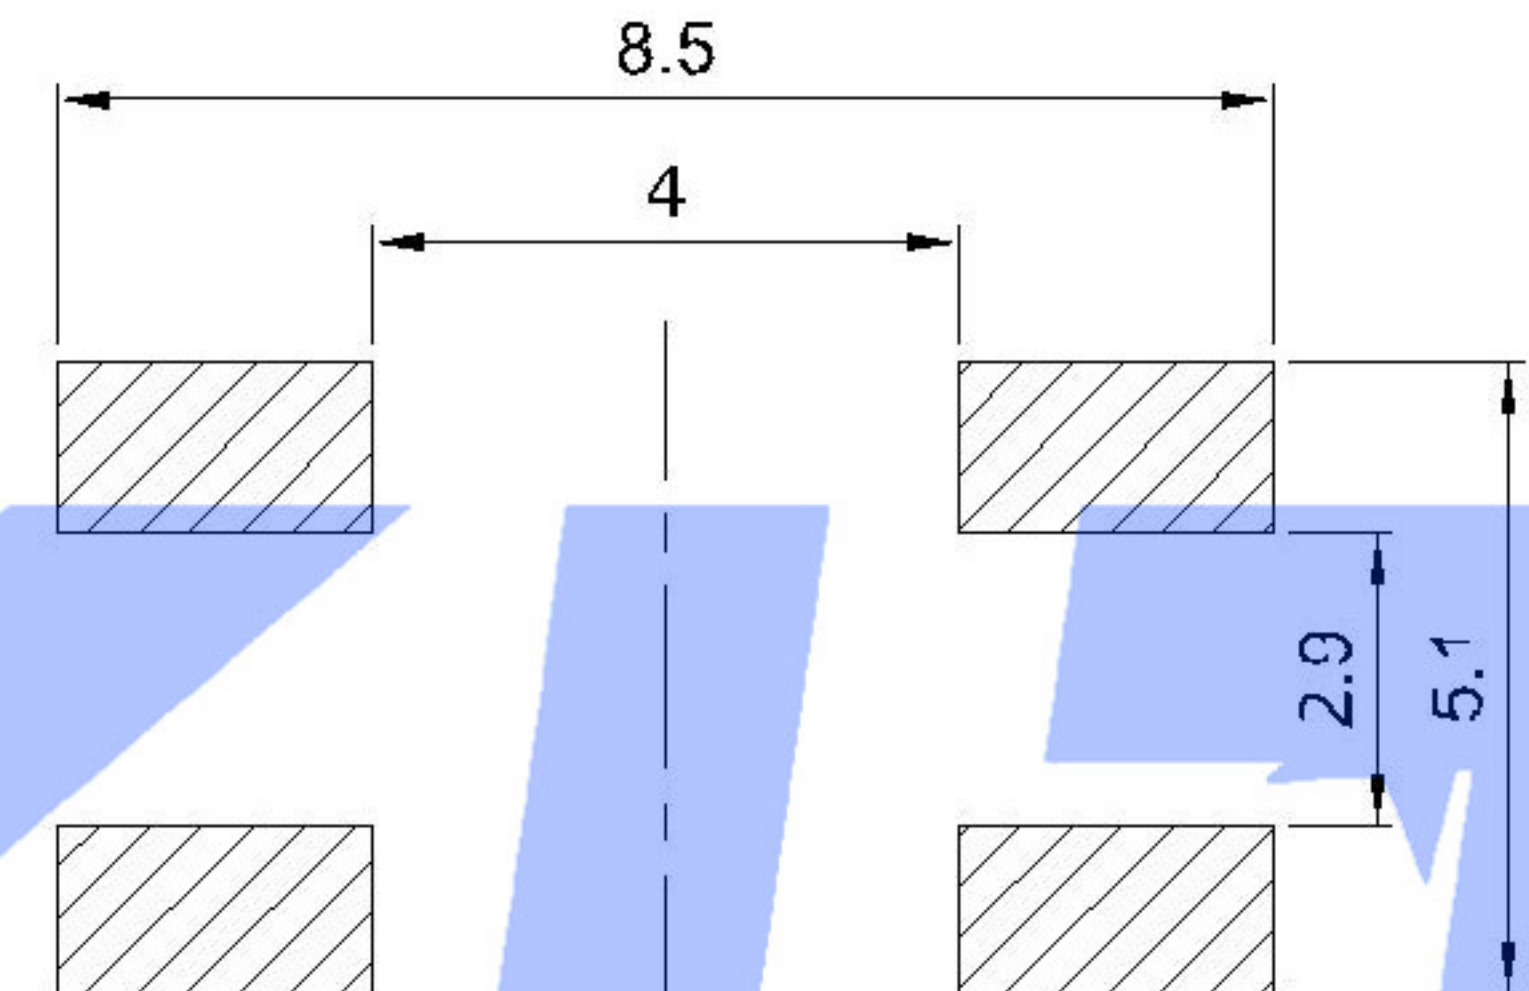


SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V D
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C +70°C
Storage Temp.	-30°C +80°C

PAPT NO	TS-1158UB-X-X-X
Operating Force	B:160gf C:260gf E:400gf
Height	H:A:3.1 B:3.5 C:4.3 D:5.0
color	BL:blue W:white

⑤	Terminal	—	4	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PA46		—
②	Cover	—	1	SPCC	Tin plated	—
①	Keystake	—	1	Silica gel		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH					
					units:	mm	DWN		DATE		VIEW: 	PART NO.:					
△ X						X.X	±0.2mm	CHKD		DATE		UNIT: mm	DWG NO.:				
△ X						X.XX	±0.1mm						TS-1158UB-X-X-X				
△ X						X.XXX	±0.05mm	APPD		DATE		SIZE: A4					
MARK	DESCRIPTION			DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES					XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
REVISIONS															1.0g	1/1	A0
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn																	

					units: mm
△X					tolerance: X.X ±0.2mm
△X					X.XX ±0.1mm
△X					X.XXX ±0.05mm
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
REVISIONS					
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					

XKB INDUSTRIAL PRECISION CO.,LIMITED