

0.25±0.1mm TRAVEL

7.20

0.30

2.50

6.50


0.80

H

2 3 4

**SPECIFICATION**

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V
Dielectric Strength	250V AC/1 minute
Travel	0.25mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

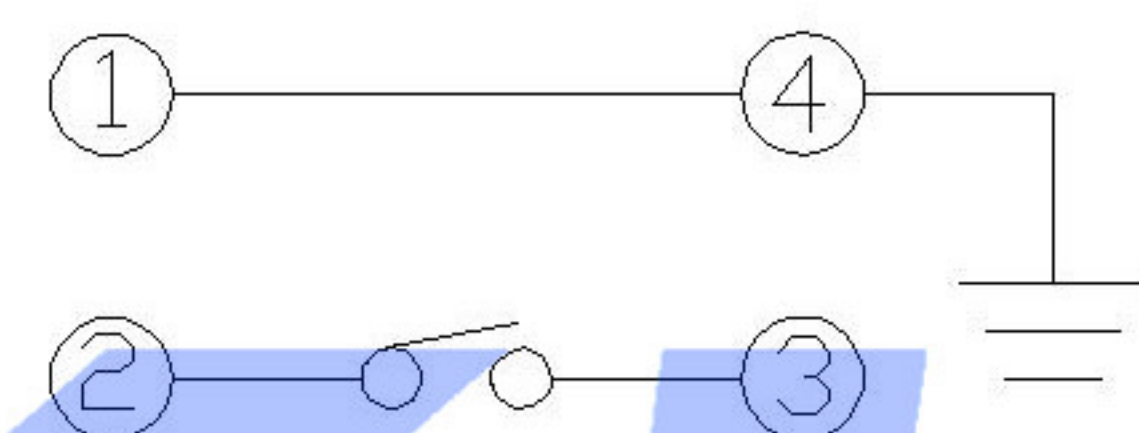


Code-X	H	Code-X	H
A	4.3	O	11.0
B	4.5	P	11.5
C	5.0	Q	12
D	5.5	R	12.5
E	6.0	S	13.0
F	6.5	T	13.5
G	7.0	U	14.0
H	7.5	V	15.0
I	8.0	W	15.5
J	8.5	X	16
K	9.0	Y	17
L	9.5	Z	18
M	10.0	19	19
N	10.5		

<b>PAPT NO</b>	TC-1102HJ-X-X
<b>Operating Force</b>	A:100gf B:160gf C:260gf
<b>Height</b>	Code-X
<b>color</b>	

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25 mm
Operating Temp.	-25°C ~ +70°C
Storage Temp.	-30°C ~ +80°C

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS		—
③	Base	—	1	PA46		—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PA46		—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE: <b>TACT SWITCH</b>		
					units: mm	DWN		DATE		VIEW: 	PART NO.:		
△X					tolerance:								
△X					X.X	±0.2mm	CHKD	DATE		UNIT: mm	DWG NO.:		
△X					X.XX	±0.1mm					TC-1102HJ-X-X		
MARK	DESCRIPTION	DATE	REVISED	APPROVED	X.XXX	±0.05mm	APPD	DATE		SIZE: A4			
REVISIONS						UNSPECIFIED TOLERANCES					XKB INDUSTRIAL PRECISION CO.,LIMITED		
www.xk-dq.cn   www.helloxkb.com   www.helloxkb.cn											WEIGHT 1.0g	SHEET 1/1	REVISION A0