



DIMENSIONS

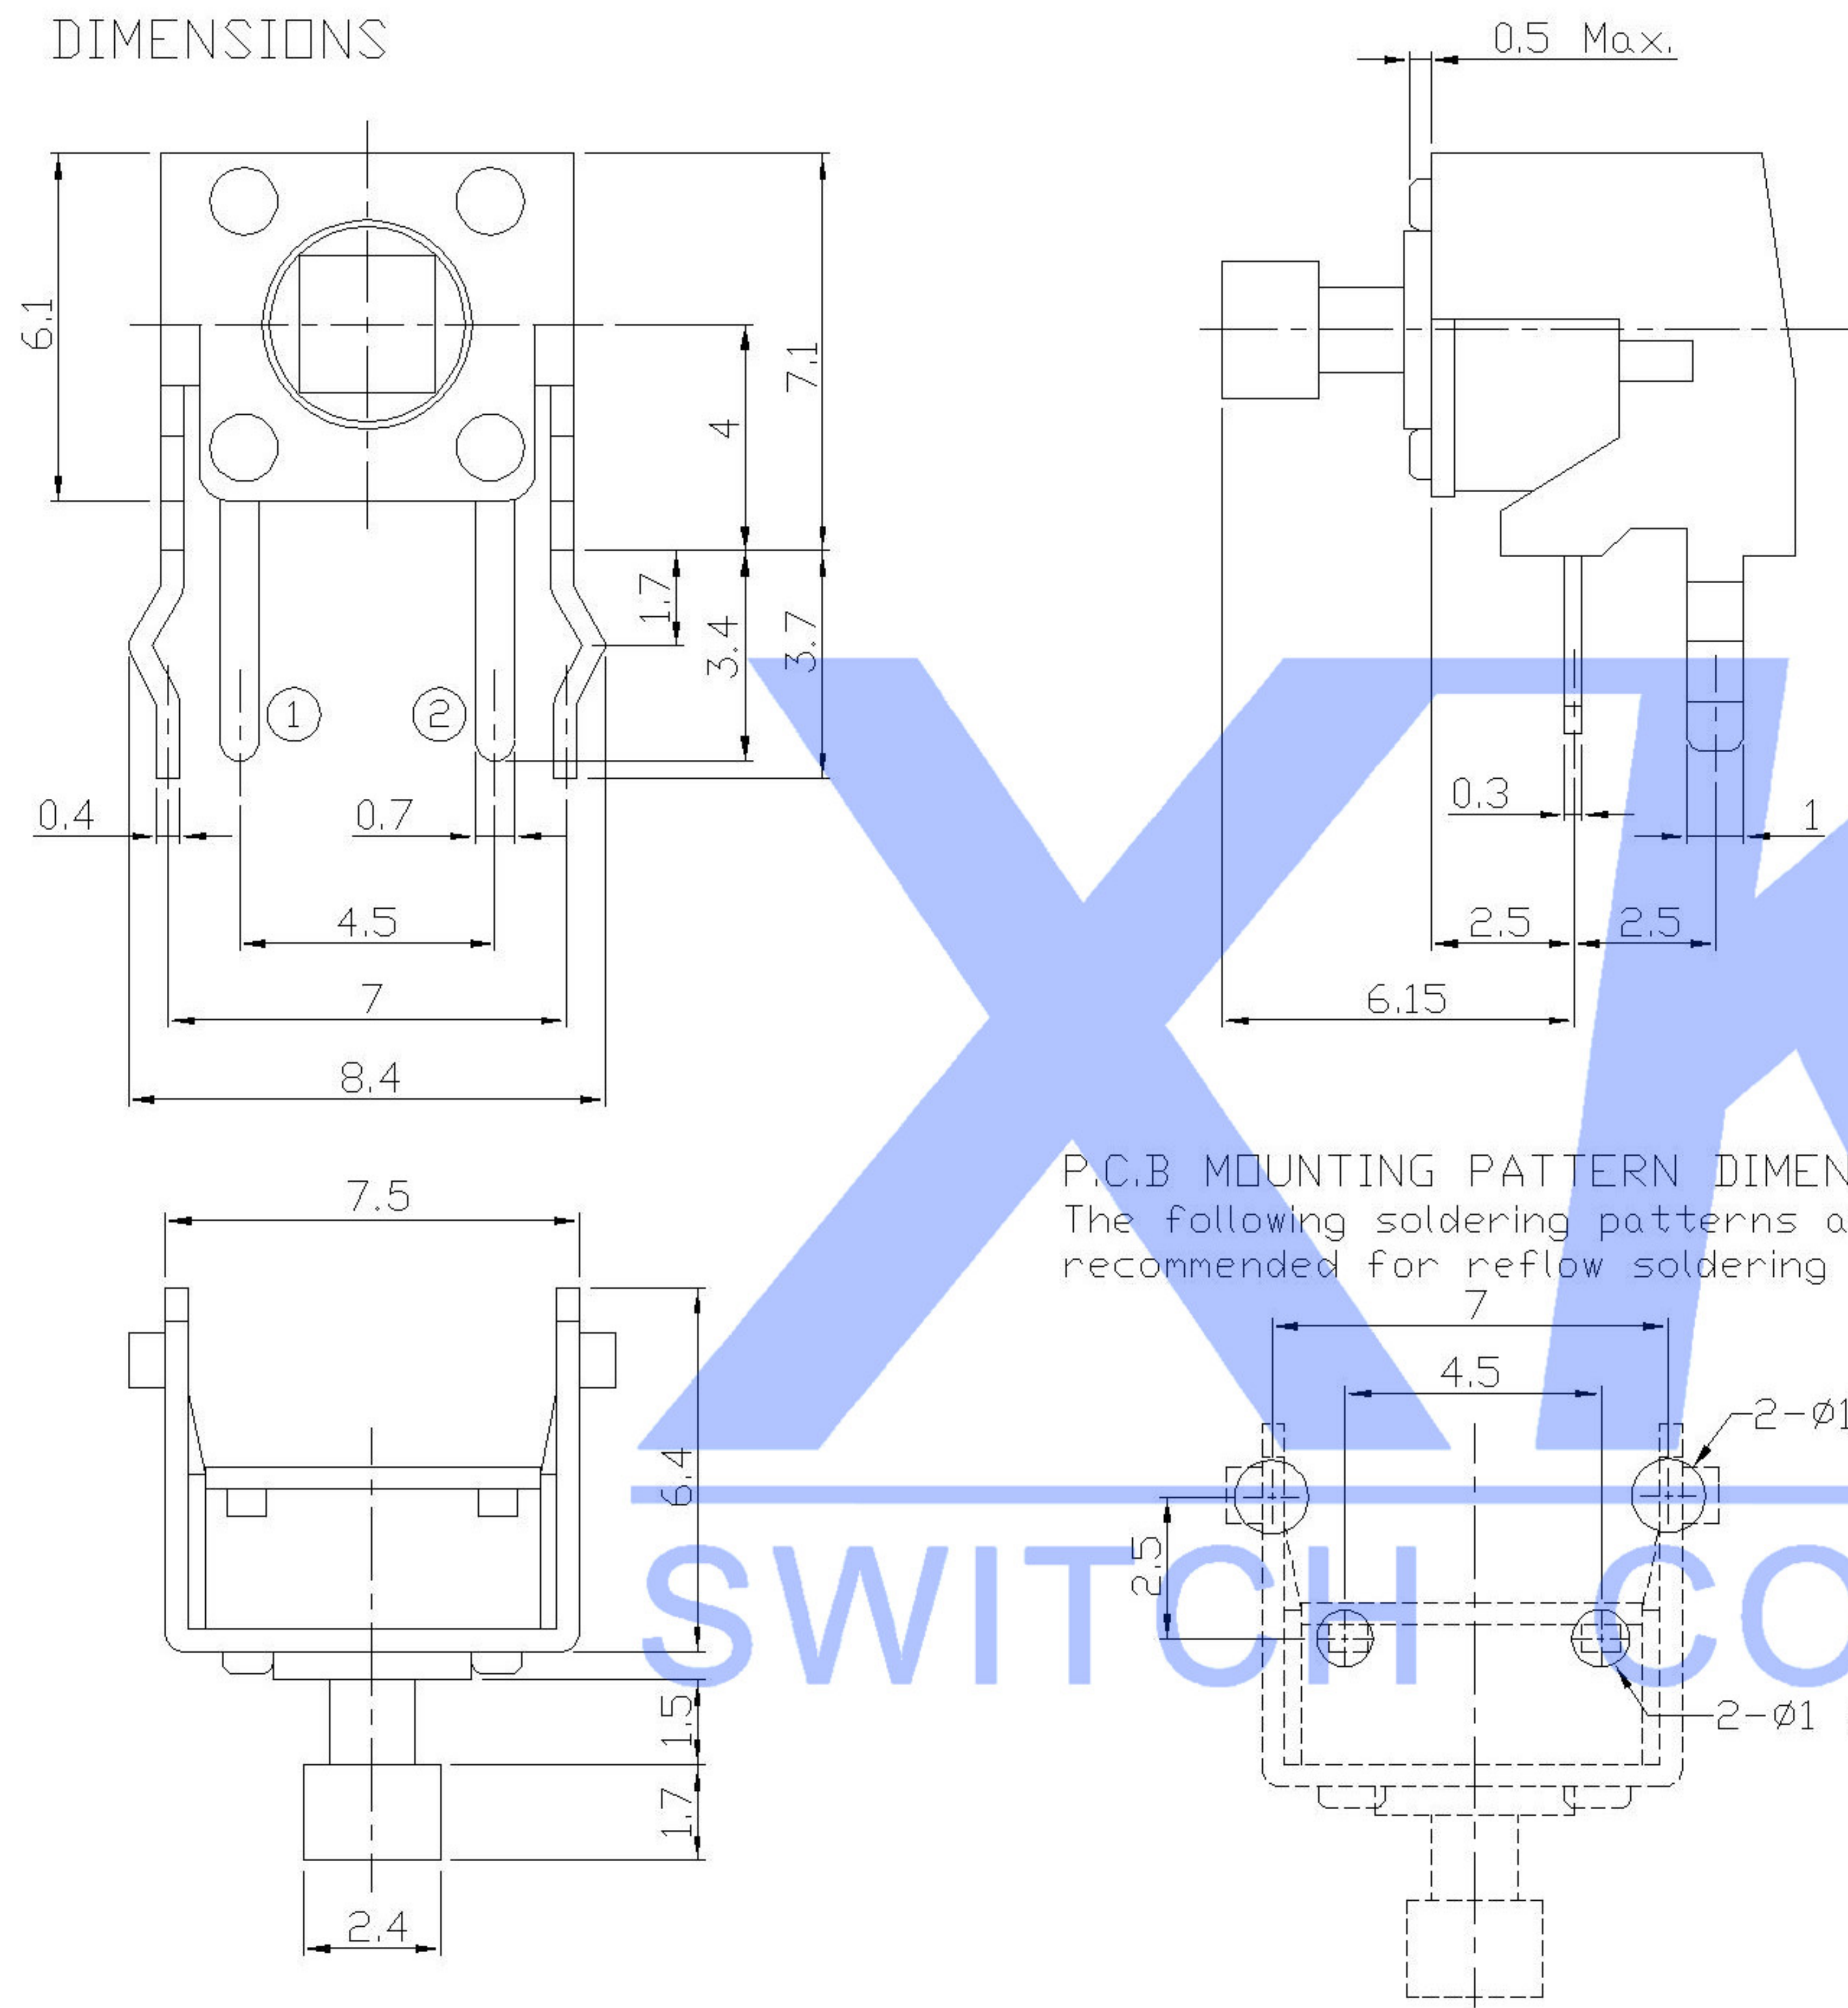

CIRCUIT DIAGRAM

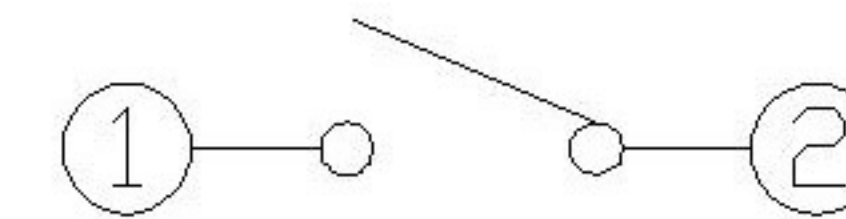

SPECIFICATION

Contact Rating	50mA 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Travel	0.25mm
Operating Temp.	-25 C ~ +70°C
Storage Temp.	-30 C ~ +80°C

PAPT NO	TC-1102NT-X
Operating Force	A: 100gf B: 160gf C: 260gf _s
Height	H: 6.15

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	1	F.ag/SUS	—	—
③	Base	—	1	PA46	—	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	PA46	—	—

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
------	-----------	--------	-----	----------	-----------	--------

△X	DESCRIPTION	DATE	REVISED	APPROVED	units: mm	tolerance:
△X					X.X	±0.2mm
△X					X.XX	±0.1mm
MARK					X.XXX	±0.05mm
REVISIONS						UNSPECIFIED TOLERANCES
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn						

DSND		DATE		SCALE: N/A	MODEL TYPE:
DWN		DATE		VIEW:	TACT SWITCH
CHKD		DATE		UNIT: mm	PART NO.:
APPD		DATE		SIZE: A4	DWG NO.:
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	REVISION
				1.0g	A0