


Circuit Diagram

PCB Layout(Pattern side)

NOTE:  
Rating: DC 12V 50mA  
Operating Force:200±100gf  
Lifetime:100,000 Cycles

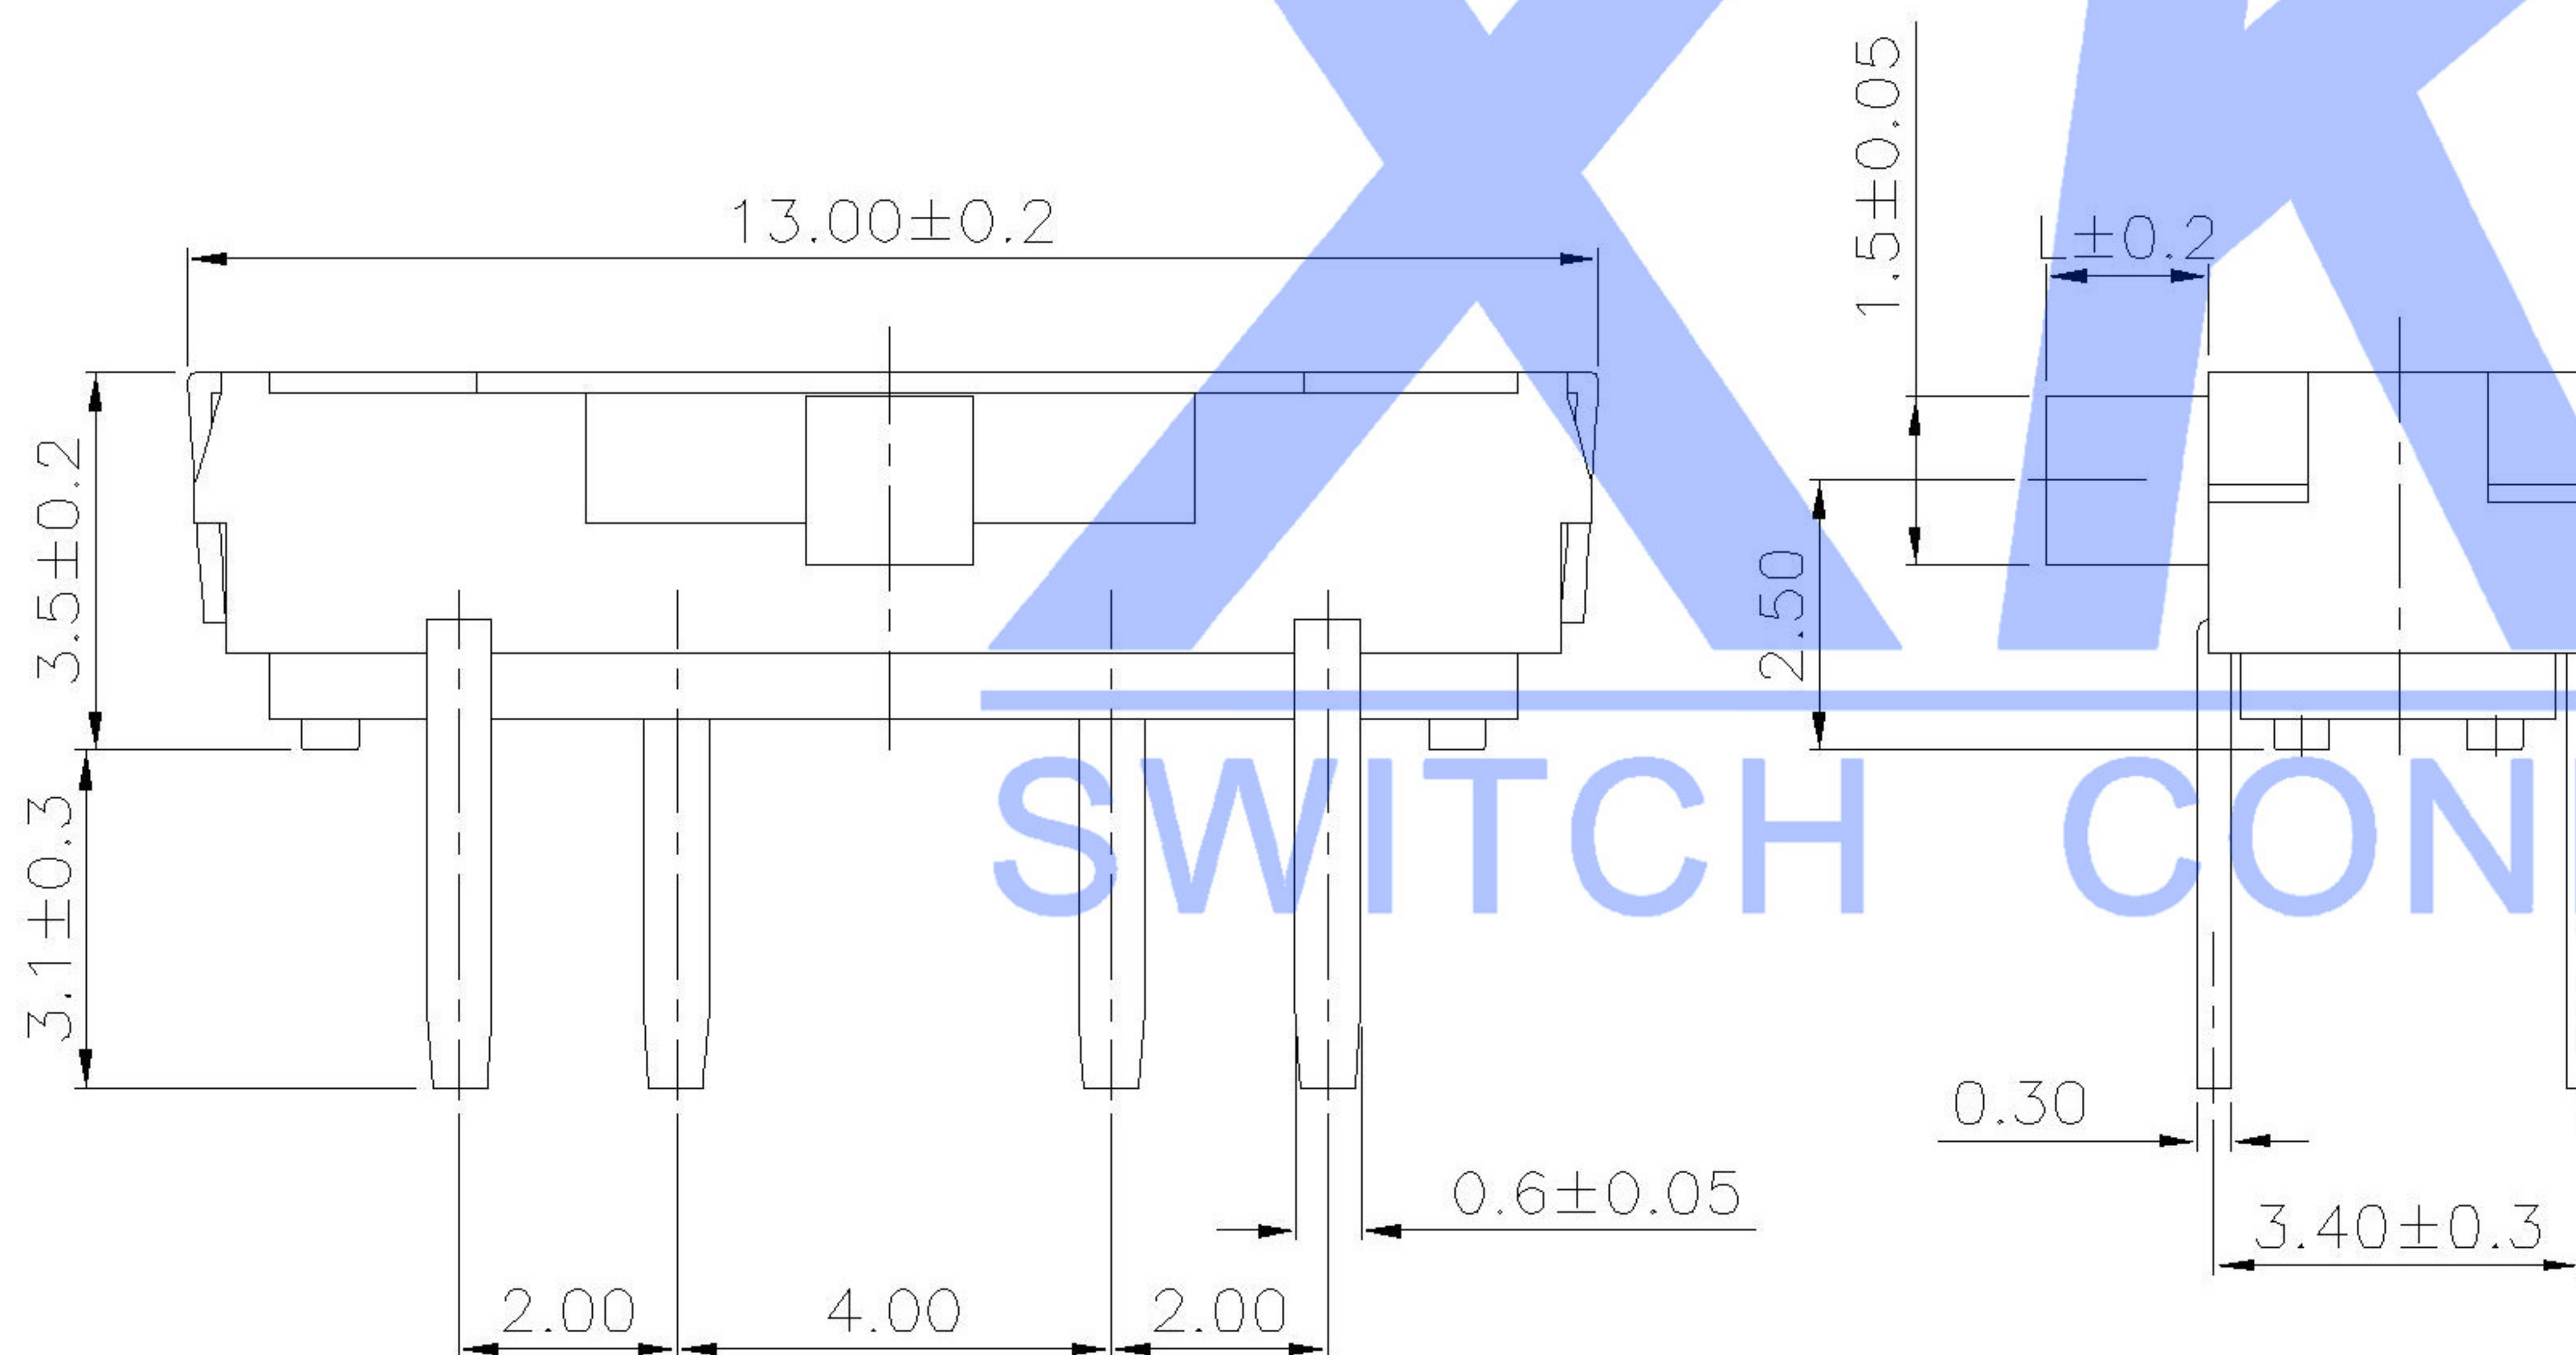

PAPT NO	L
SK-3346D-01-L1	2.0
SK-3346D-01-L2	3.0
SK-3346D-01-L3	4.0

ITEM	PAPT NAMF	TER,NO	QTY	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	4	Brass (0.30t)	ag Plated	—
④	Contact spring	—	1	Beryllium copper	—	—
③	Base	—	1	LCP	—	—
②	Cover	—	1	SUS	Tin plated	—
①	Keystake	—	1	PA46	—	—

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGLAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

DSND	DATE	SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN	DATE	VIEW:	PART NO.:
CHKD	DATE	UNIT: mm	DWG NO.:
APPD	DATE	SIZE: A4	SK-3346D-01-X
XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT 1.0g
			SHEET 1/1
			REVISION A0