

MODEL CODE



SS-12D06-X-X-X

Knob Type
L
G

H (mm)
2 ~ 12


Colour
B:Black
R:Red

P. C. B LAYOUT

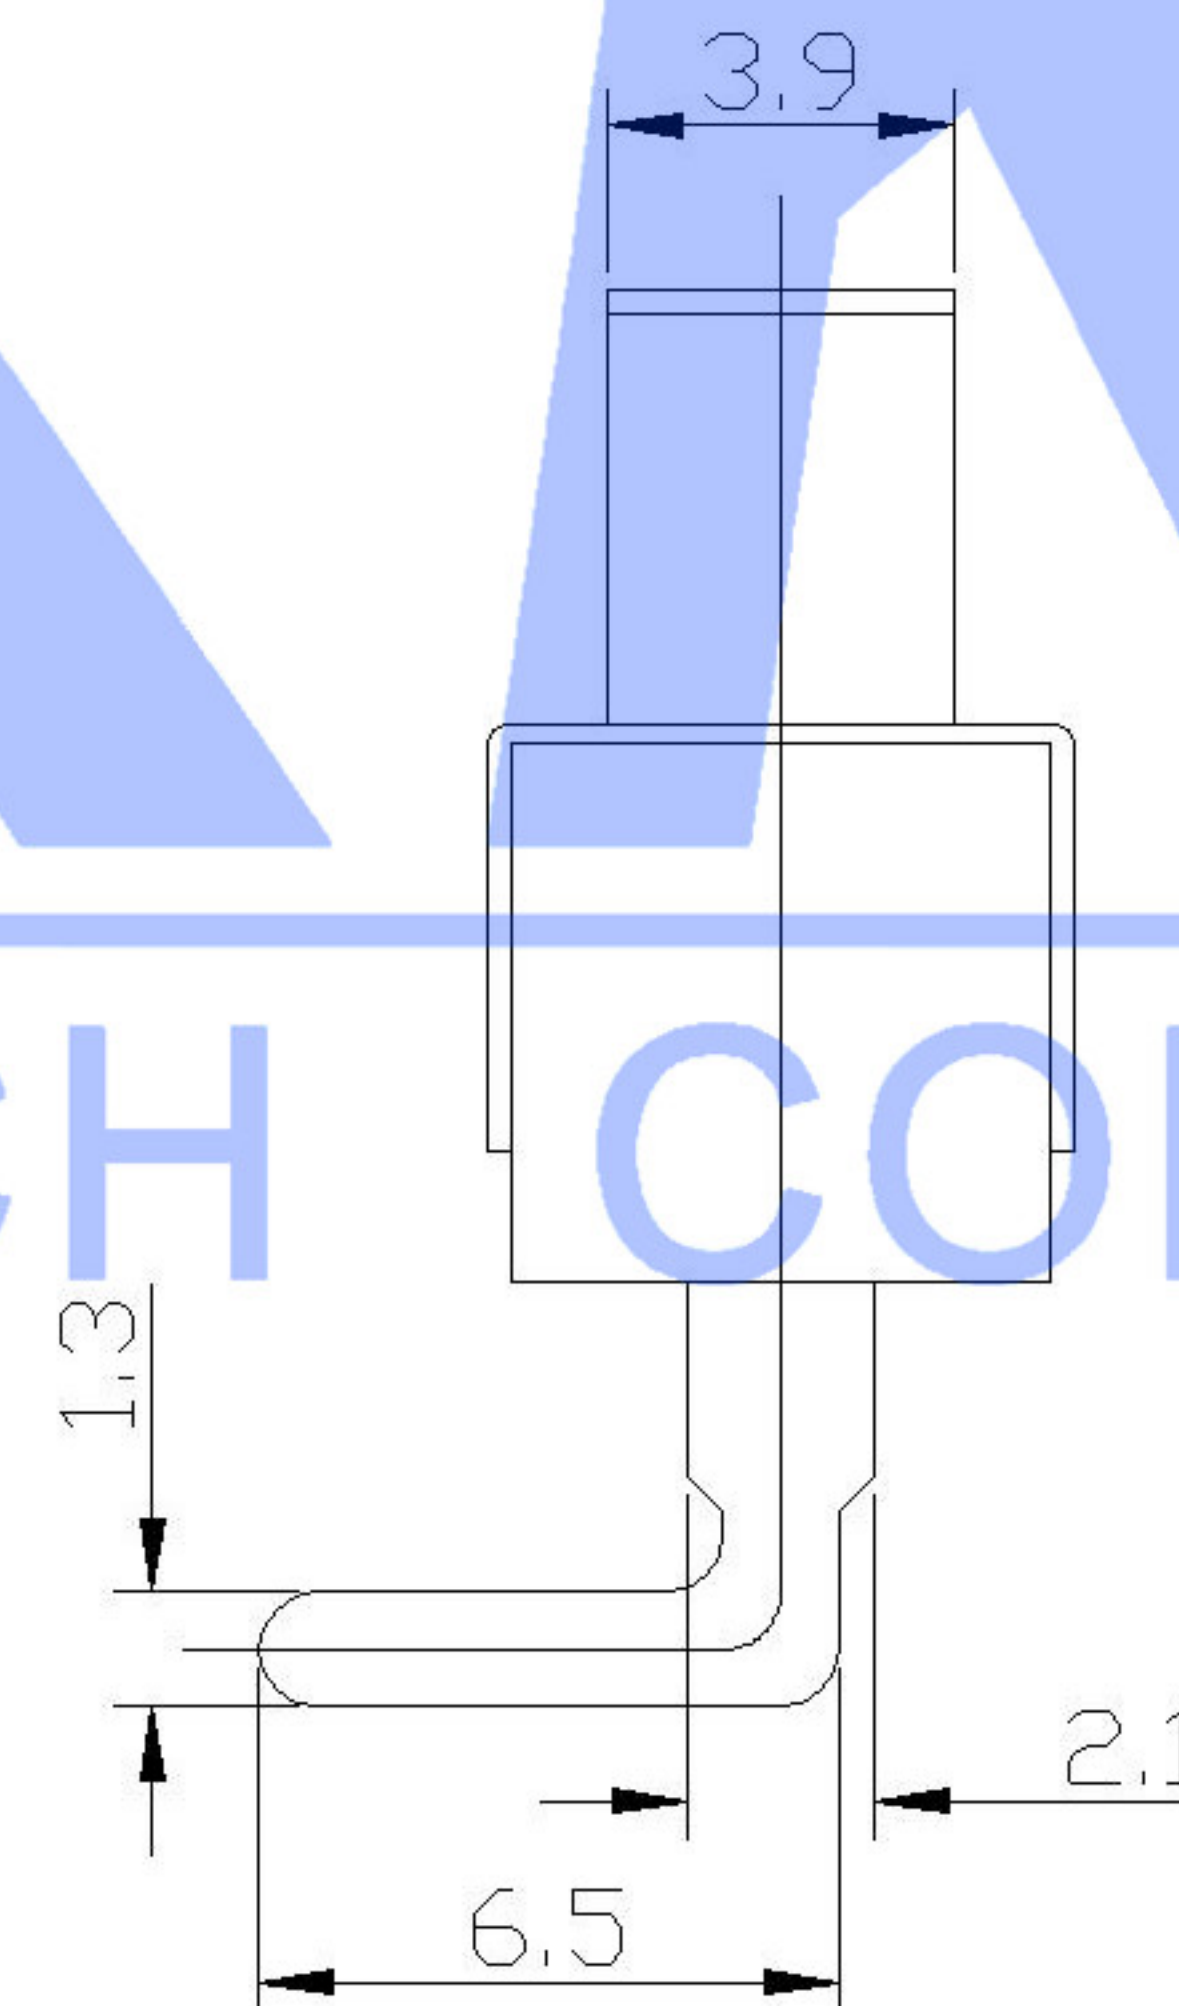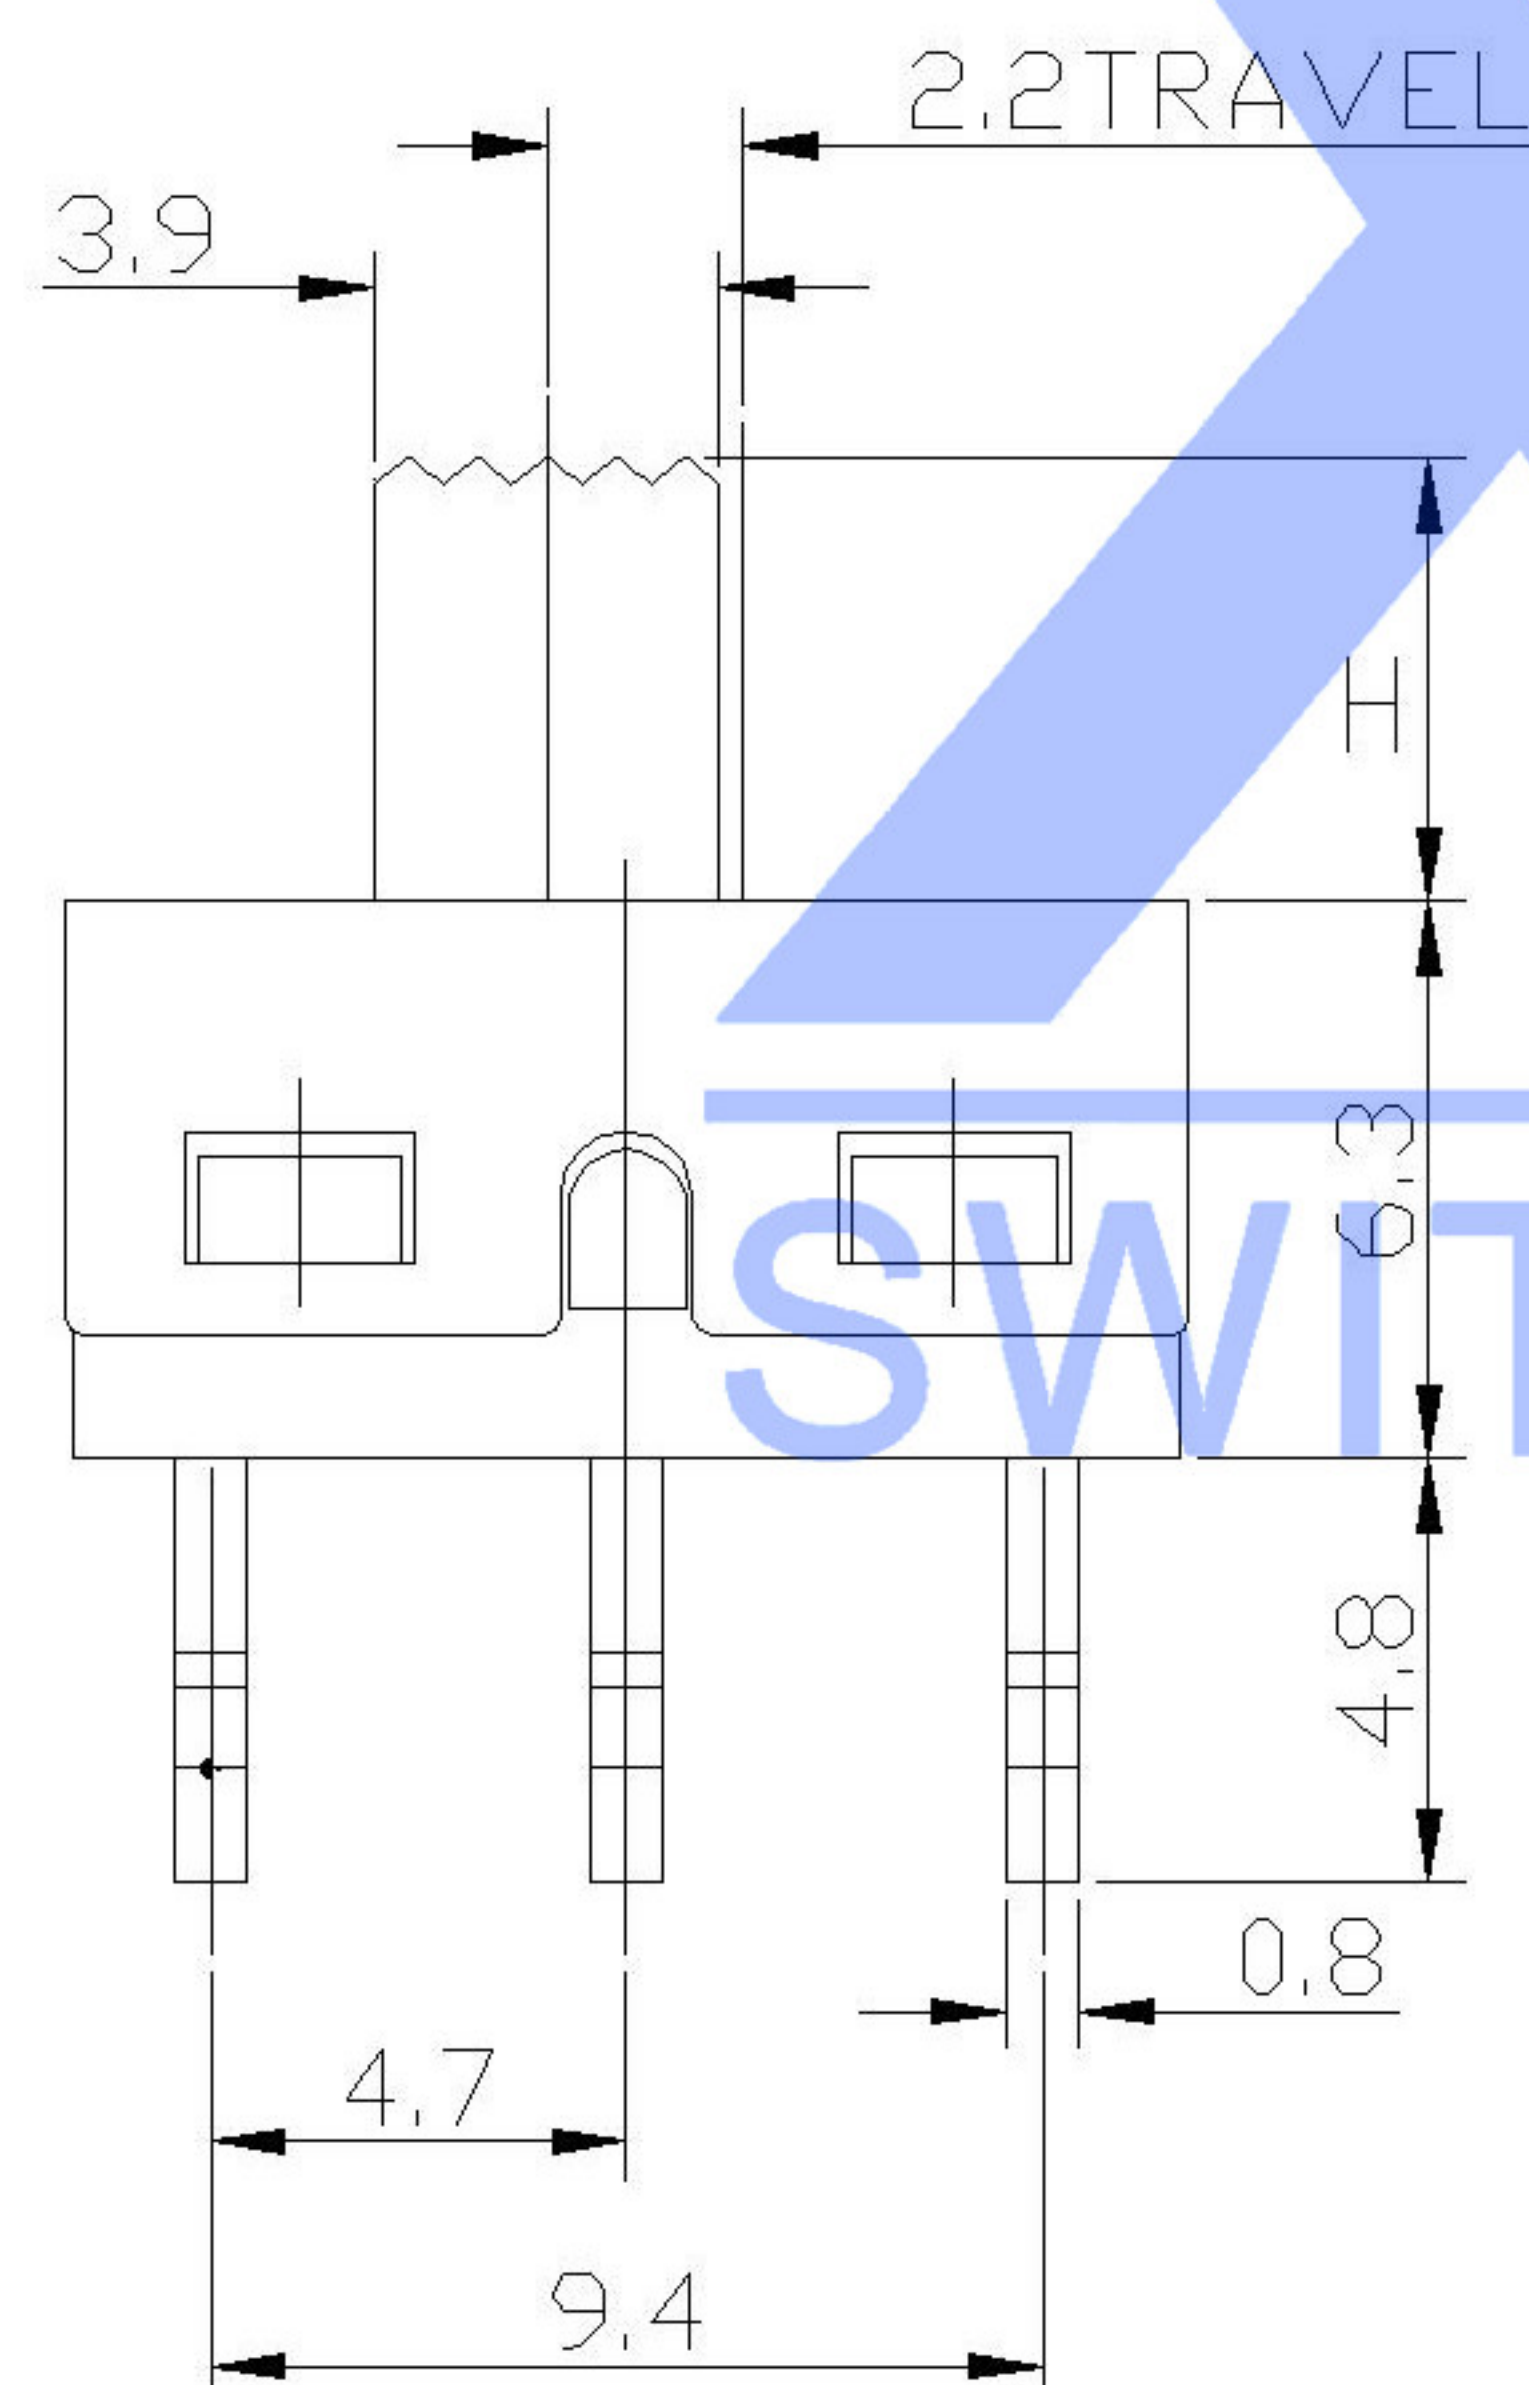


SCHEMATIC

G TYPE

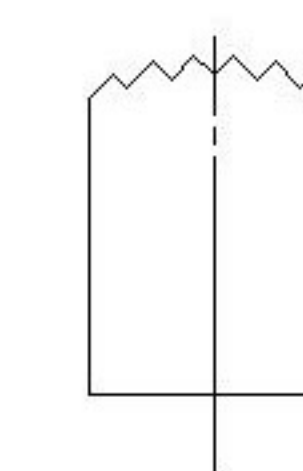

L TYPE

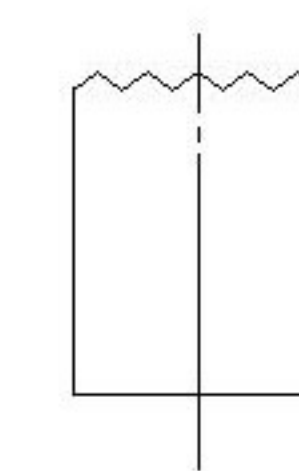

Typical Specifications

1. Rating : AC 120V 5A
2. Insulation Resistance:1,000M min
3. Dielectric Strength:1,500V RMS
4. Operating Life : 30,000 cycles

⑤	Terminal	—	3	Copper	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	PA	Black/RED	—
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystoke	—	1	PA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
△X					ANGULAR ±5°
△X					L ≤ 4 ±0.2
△X					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5
REVISIONS					
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					

DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm	DWG NO.:
APPD		DATE		SIZE: A4	SS-12D06-XX-X
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT 1.0g	SHEET 1/1
					REVISION A0