



SS-22G88-X X

Knob Type	H (mm)
L	2 ~ 12
G	

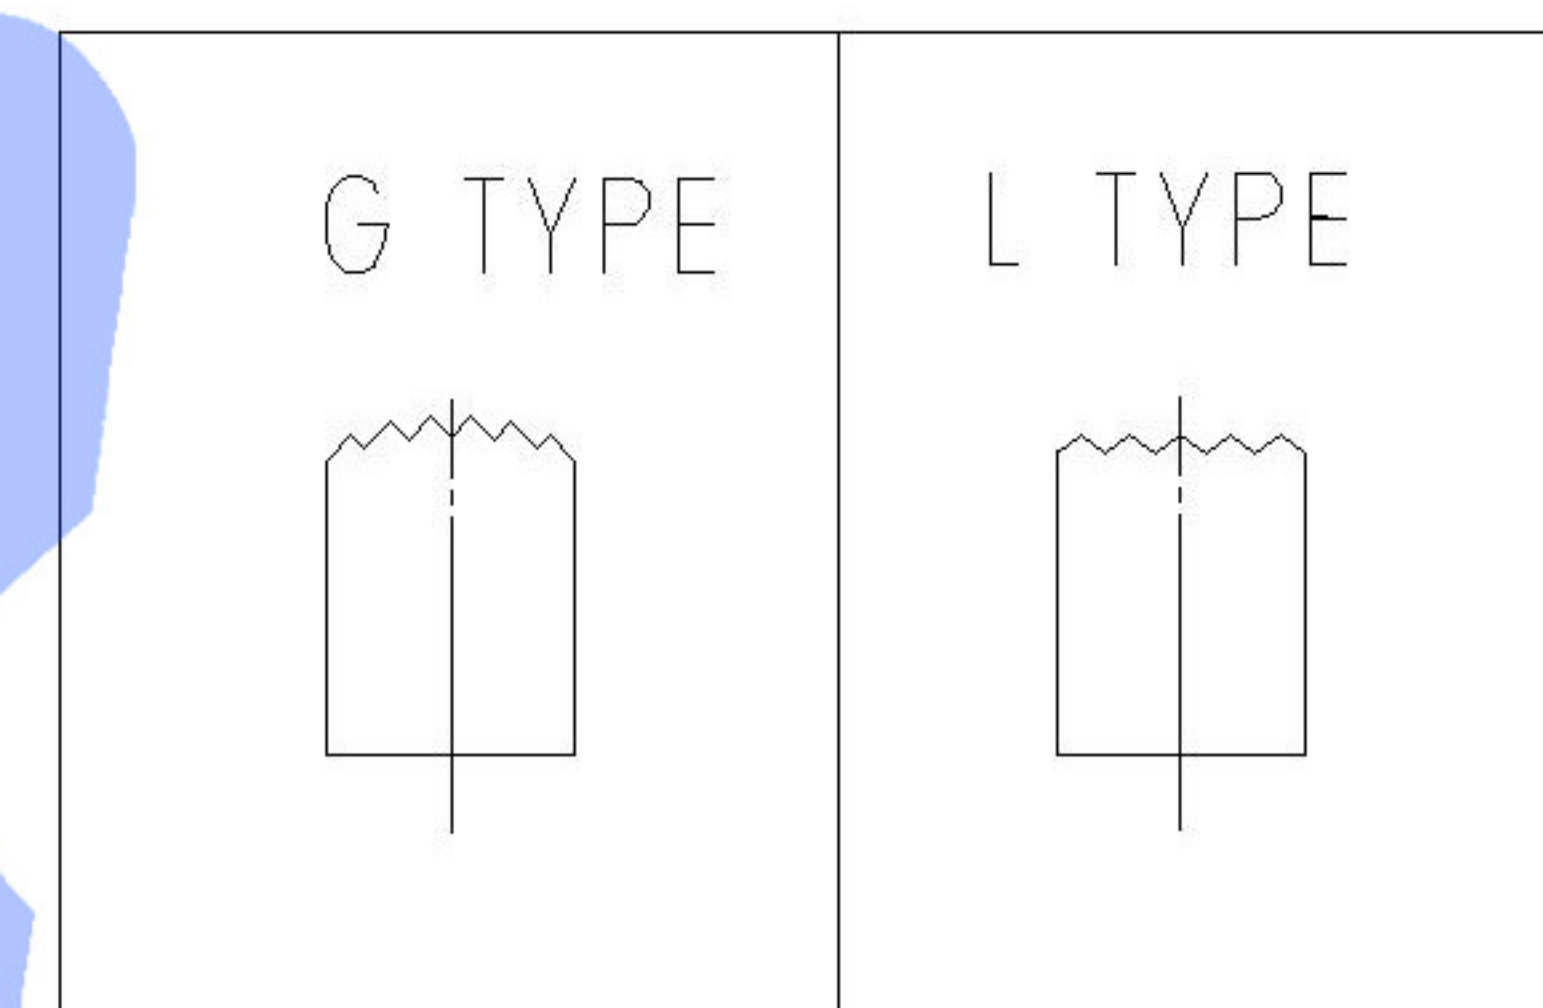

1. Rating : AC 120V 5A
2. Insulation Resistance: 1,000M min
3. Dielectric Strength: 1,500V RMS
4. Operating Life : 30,000 cycles

⑤	Terminal	—	6	Copper	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	PA	Black	—
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystoke	—	1	PA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

							DSND		DATE		SCALE: N/A	MODEL TYPE: SLIDE SWITCH		
					ANGLAR	±5°	DWN		DATE		VIEW: 	PART NO.:		
△x					L ≤ 4	±0.2	CHKD		DATE		UNIT: mm	DWG NO.: SS-22G88-XX		
△x					4 < L ≤ 16	±0.3								
△x					16 < L ≤ 63	±0.4	APPD		DATE		SIZE: A4			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L > 63	±0.5								
REVISIONS						UNSPECIFIED TOLERANCES	KXB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT	SHEET	REVISION
www.xk-dg.cn    www.helloxkb.com    www.helloxkb.cn												1.0g	1/1	A0