
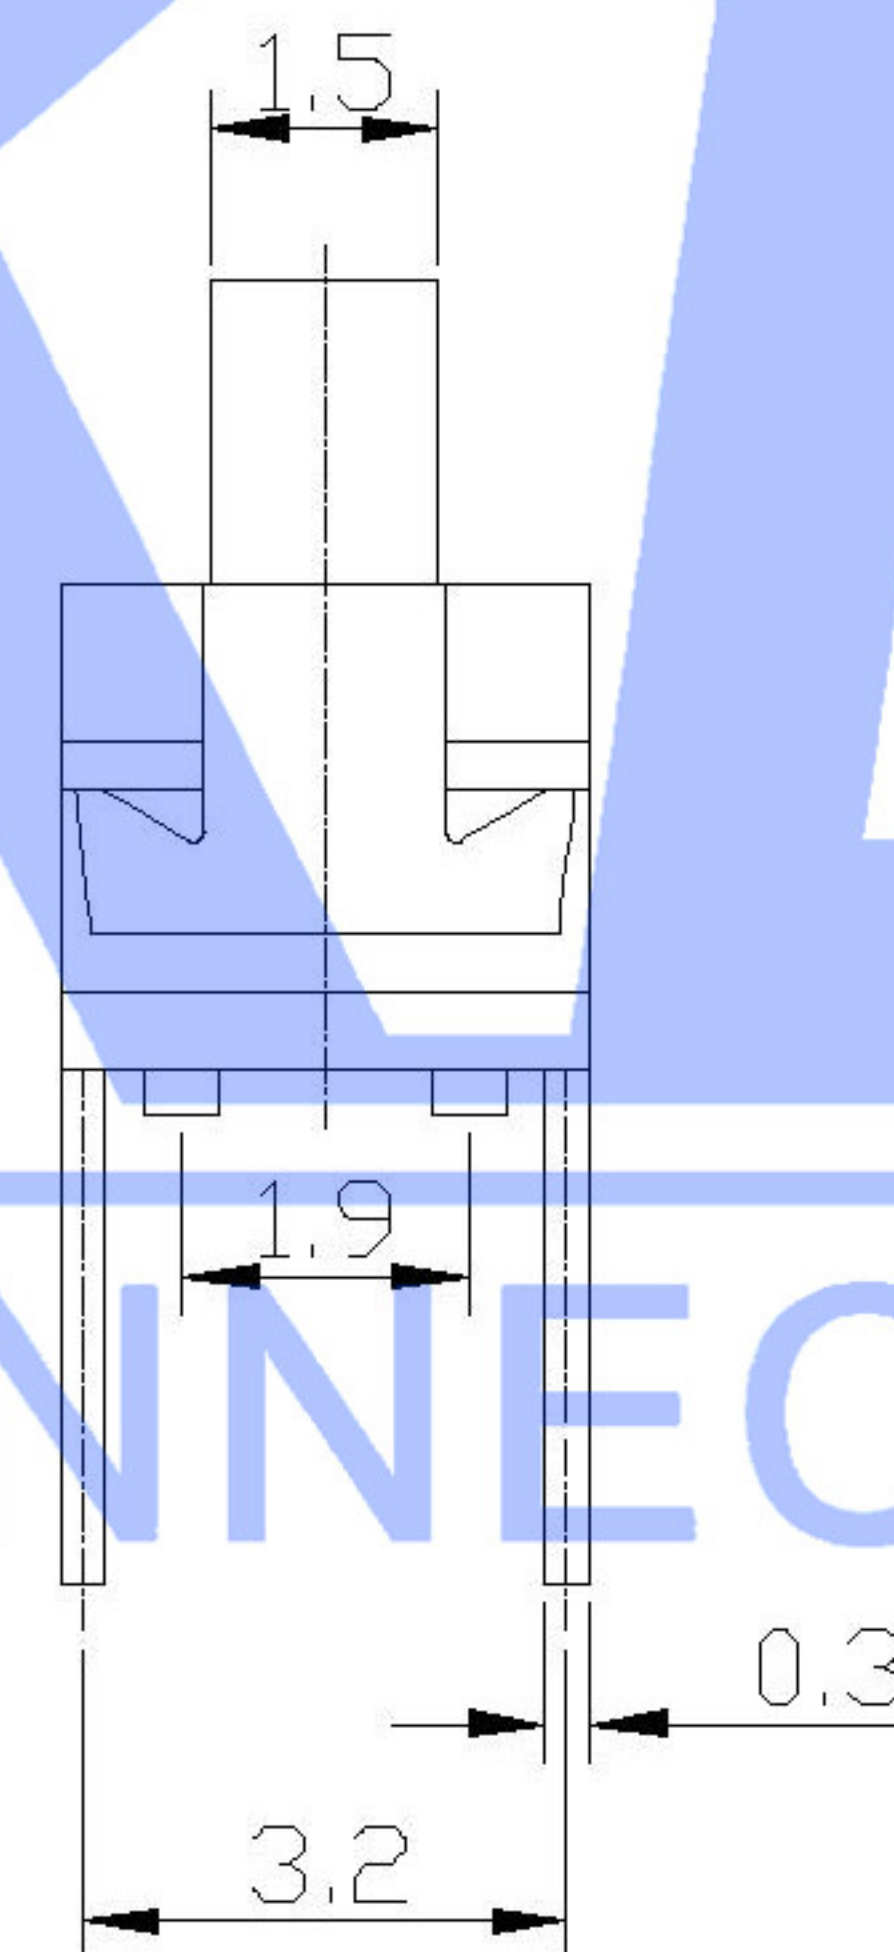


SCHEMATIC

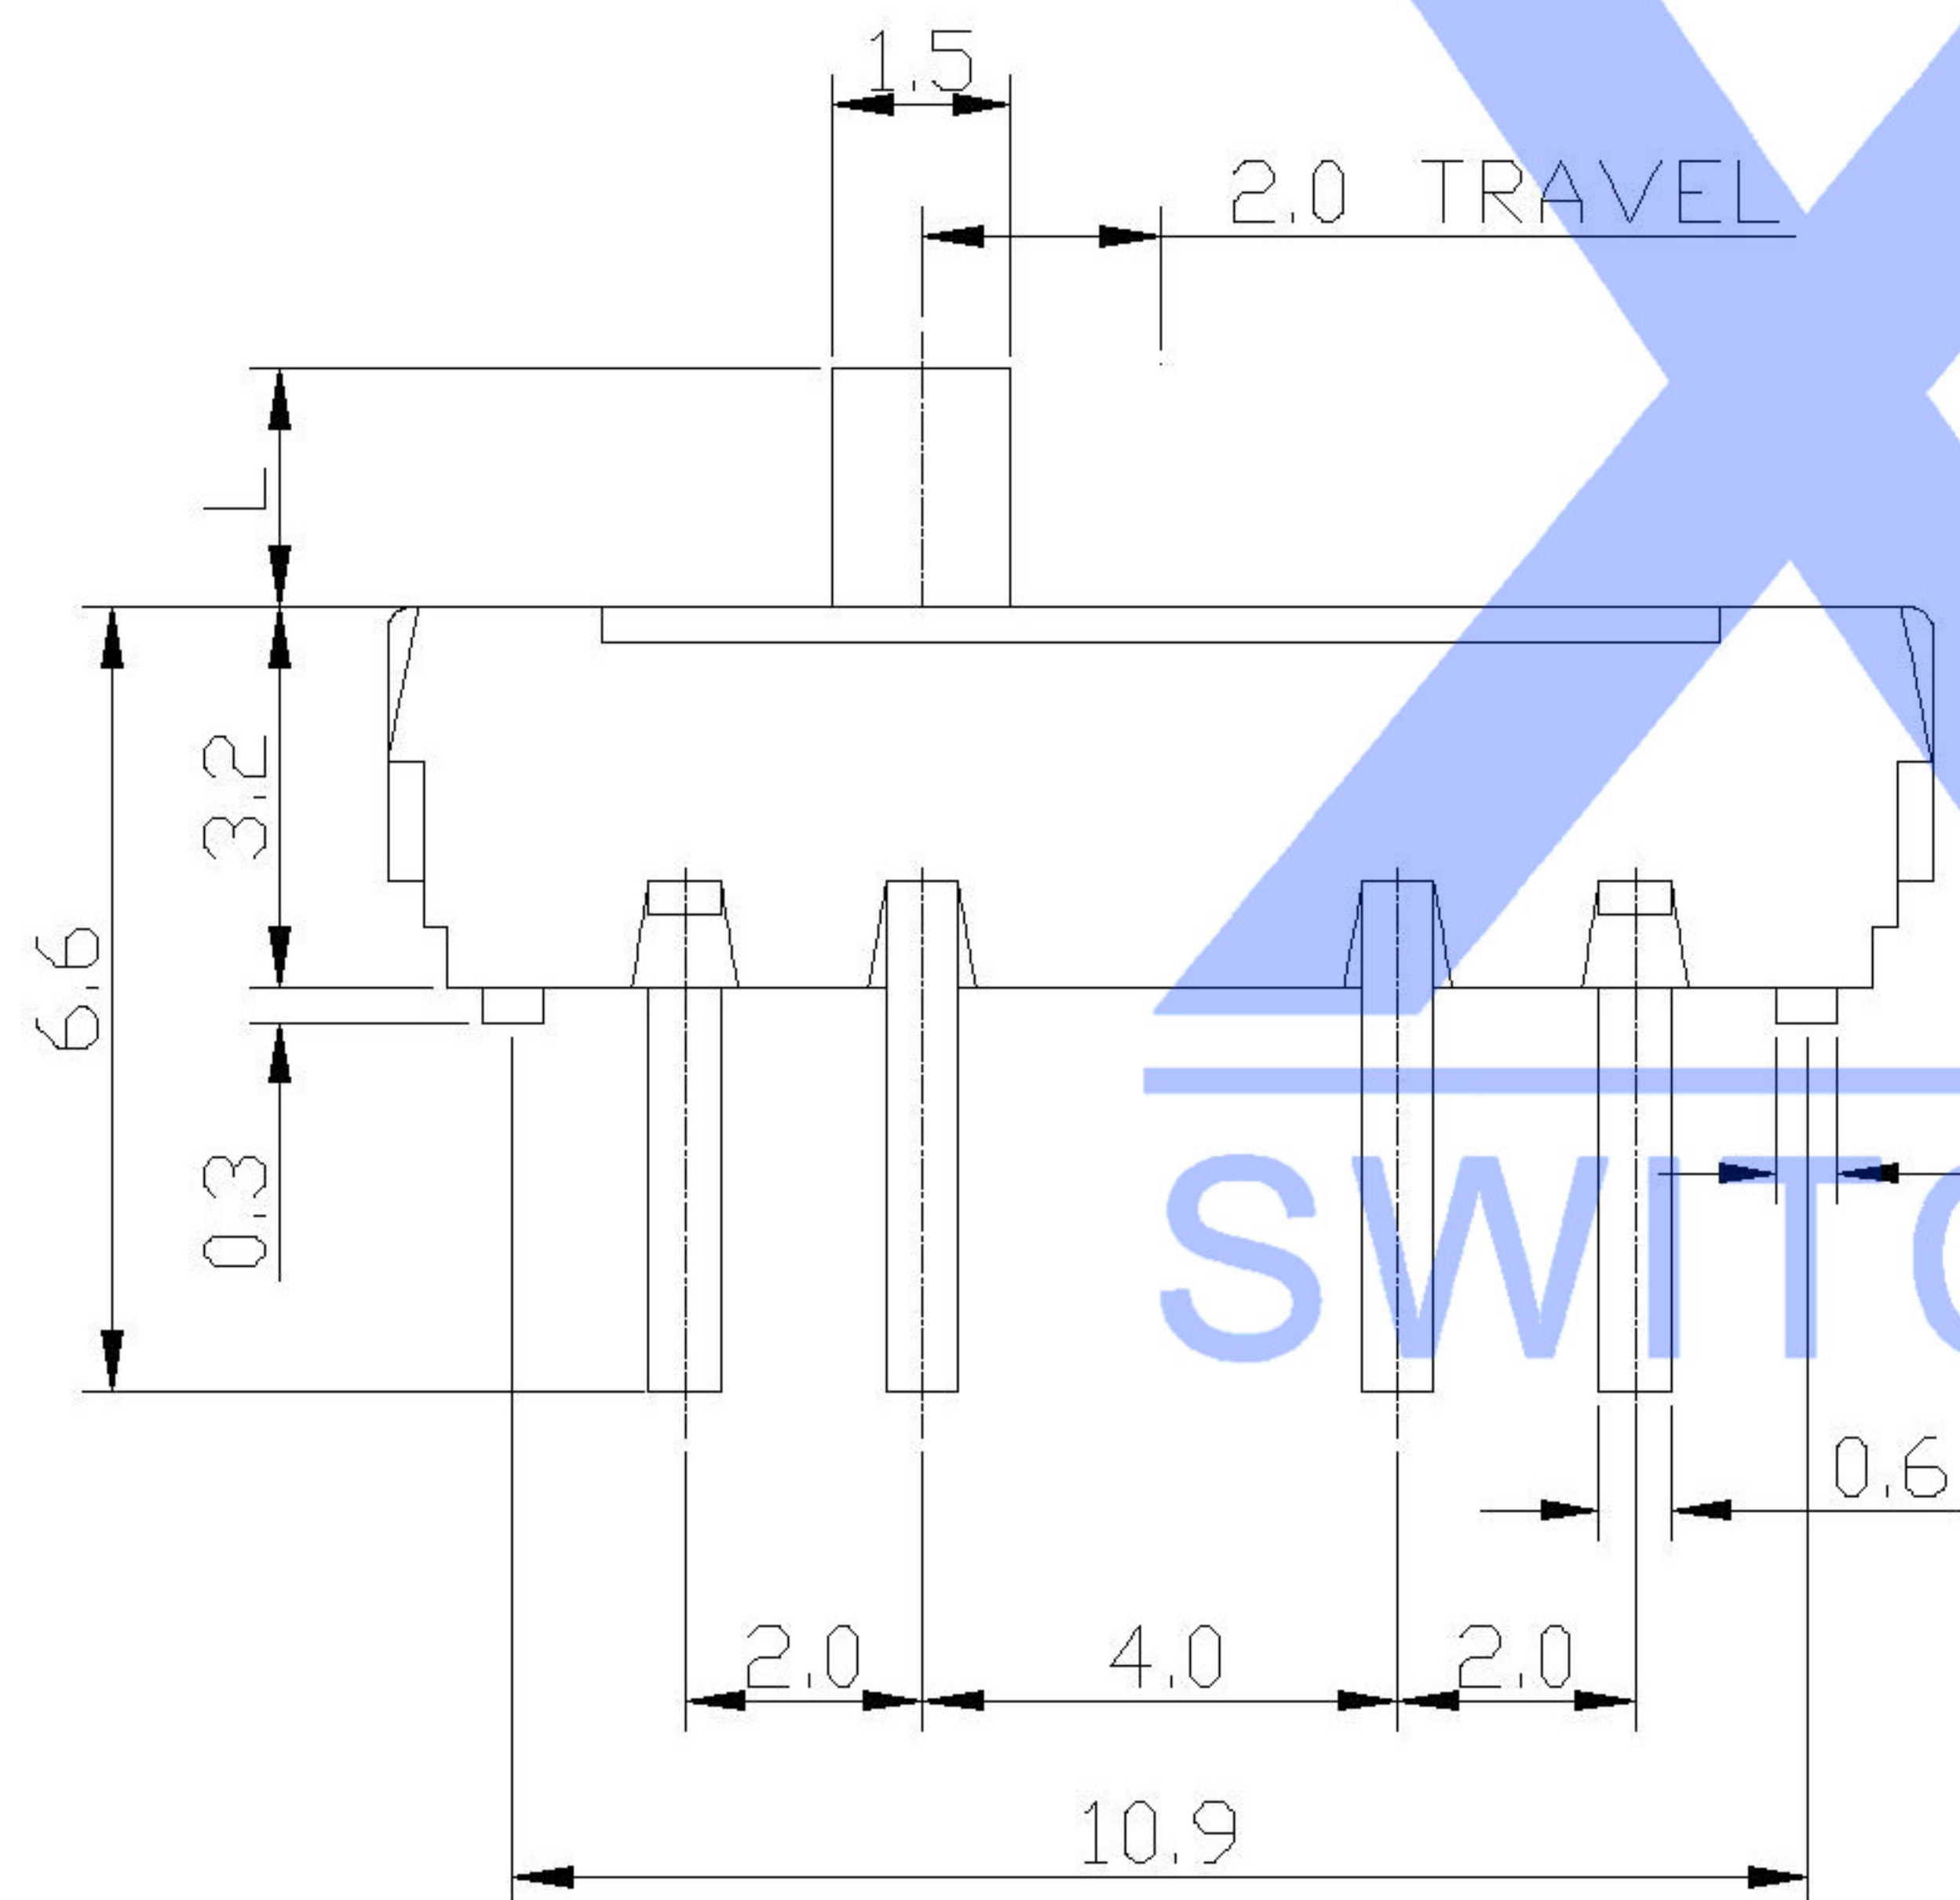

NOTE:

Rating: DC 12V 50mA

Operating Force: 200±100gf

Lifetime: 100,000 Cycles

PAPT NO	L
SS-3336D-02-L1	2.0
SS-3336D-02-L2	3.0
SS-3336D-02-L3	4.0

⑤	Terminal	—	8	Brass (0.30t)	ag Plated	—
④	Contact spring	—	1	Beryllium copper		—
③	Base	—	1	LCP		—
②	Cover	—	1	SUS	Tin plated	—
①	Keystake	—	1	PA46		—
ITEM	PAPT NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

△X					ANGLAR	±5°	DSND		DATE	SCALE: N/A	MODEL TYPE:
△X					L ≤ 4	±0.2	DWN		DATE	VIEW:	SLIDE SWITCH
△X					4 < L ≤ 16	±0.3	CHKD		DATE	UNIT: mm	PART NO.:
MARK	DESCRIPTION	DATE	REVISED	APPROVED	16 < L ≤ 63	±0.4	APPD		DATE	SIZE: A4	DWG NO.:
					L > 63	±0.5				SS-3336D-02-X	
					UNSPECIFIED TOLERANCES			XKB INDUSTRIAL PRECISION CO., LIMITED			WEIGHT
											1.0g
											SHEET
											1/1
											REVISION
											A0