
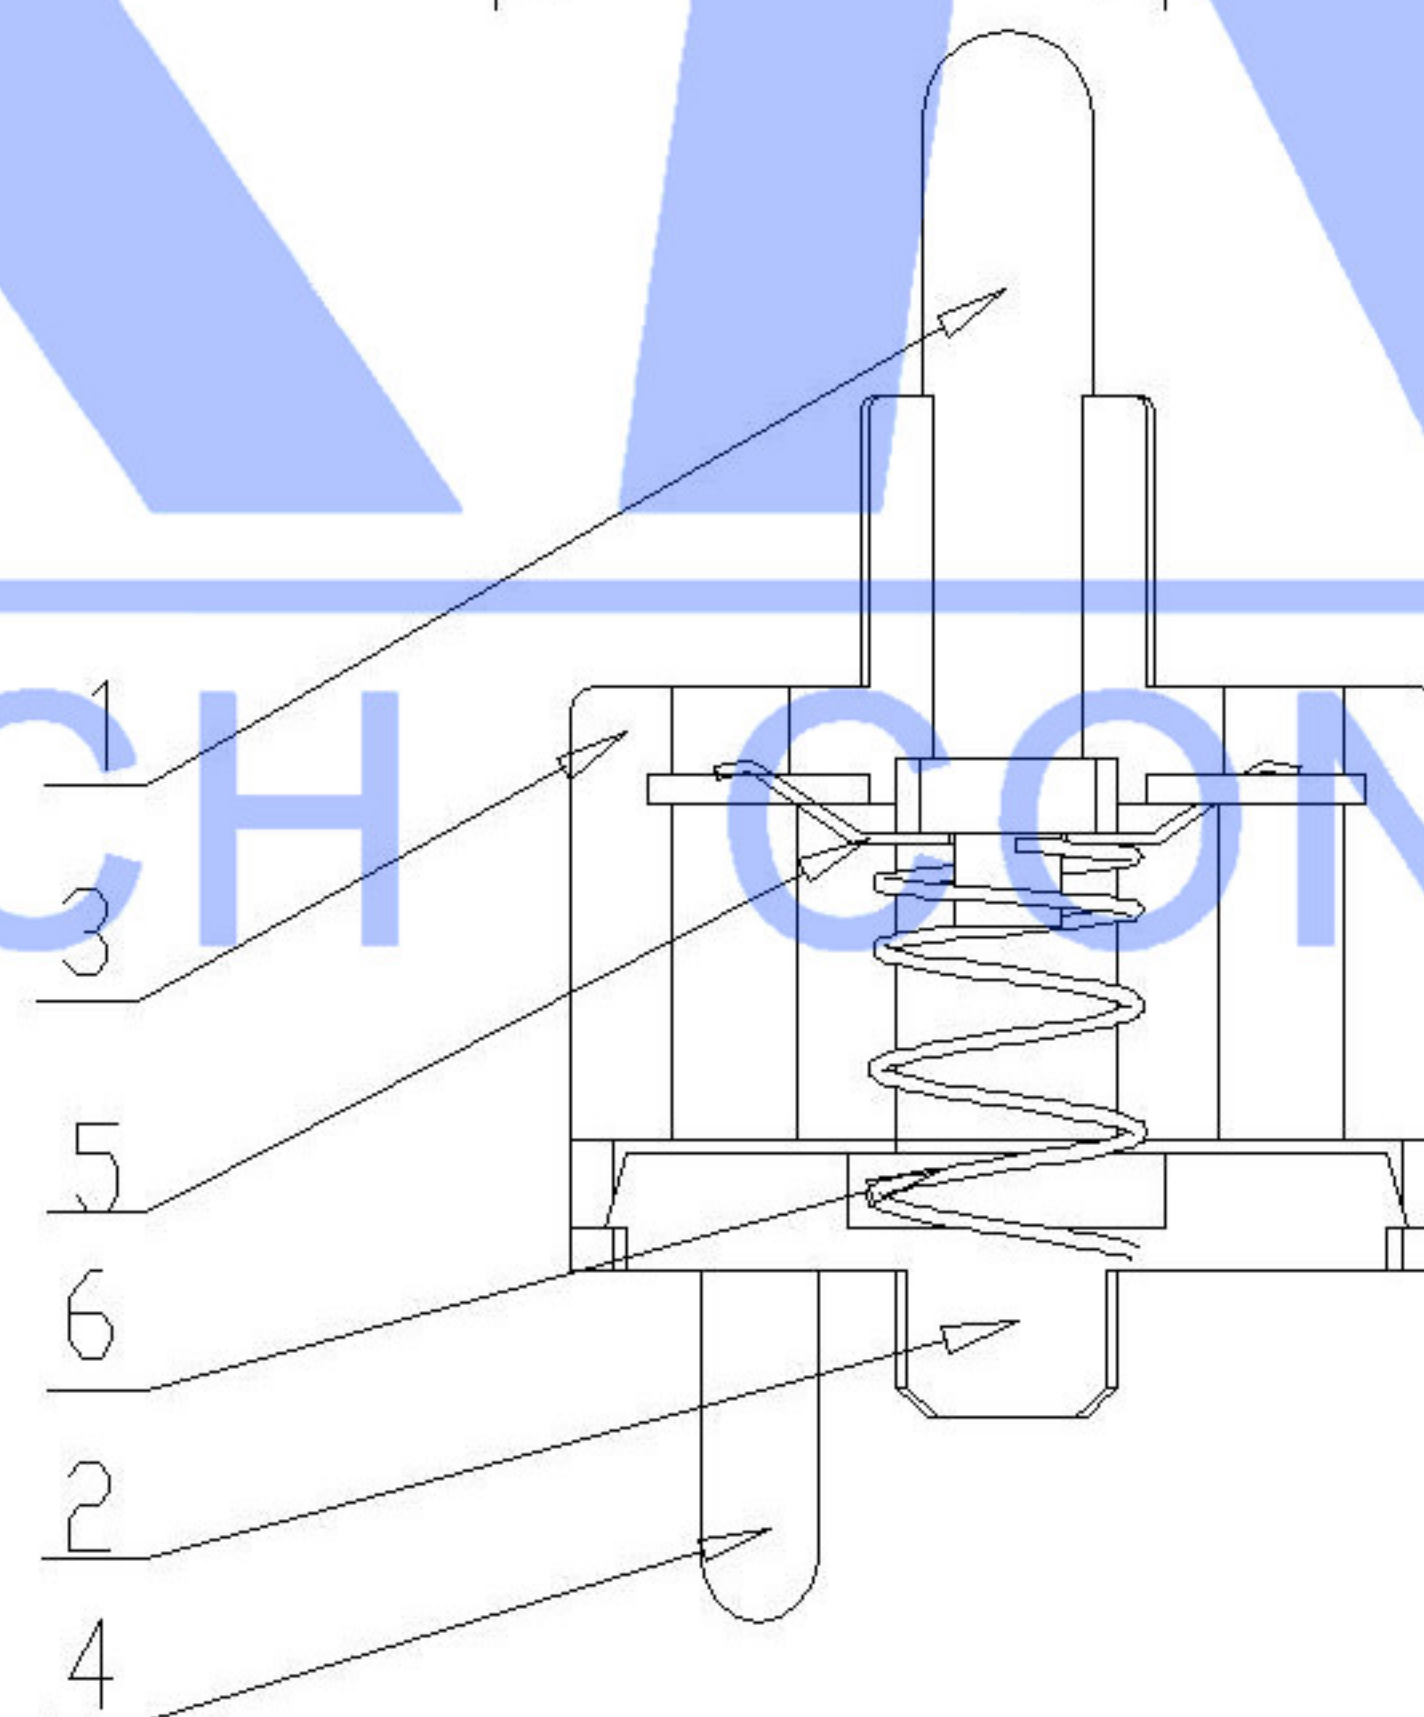
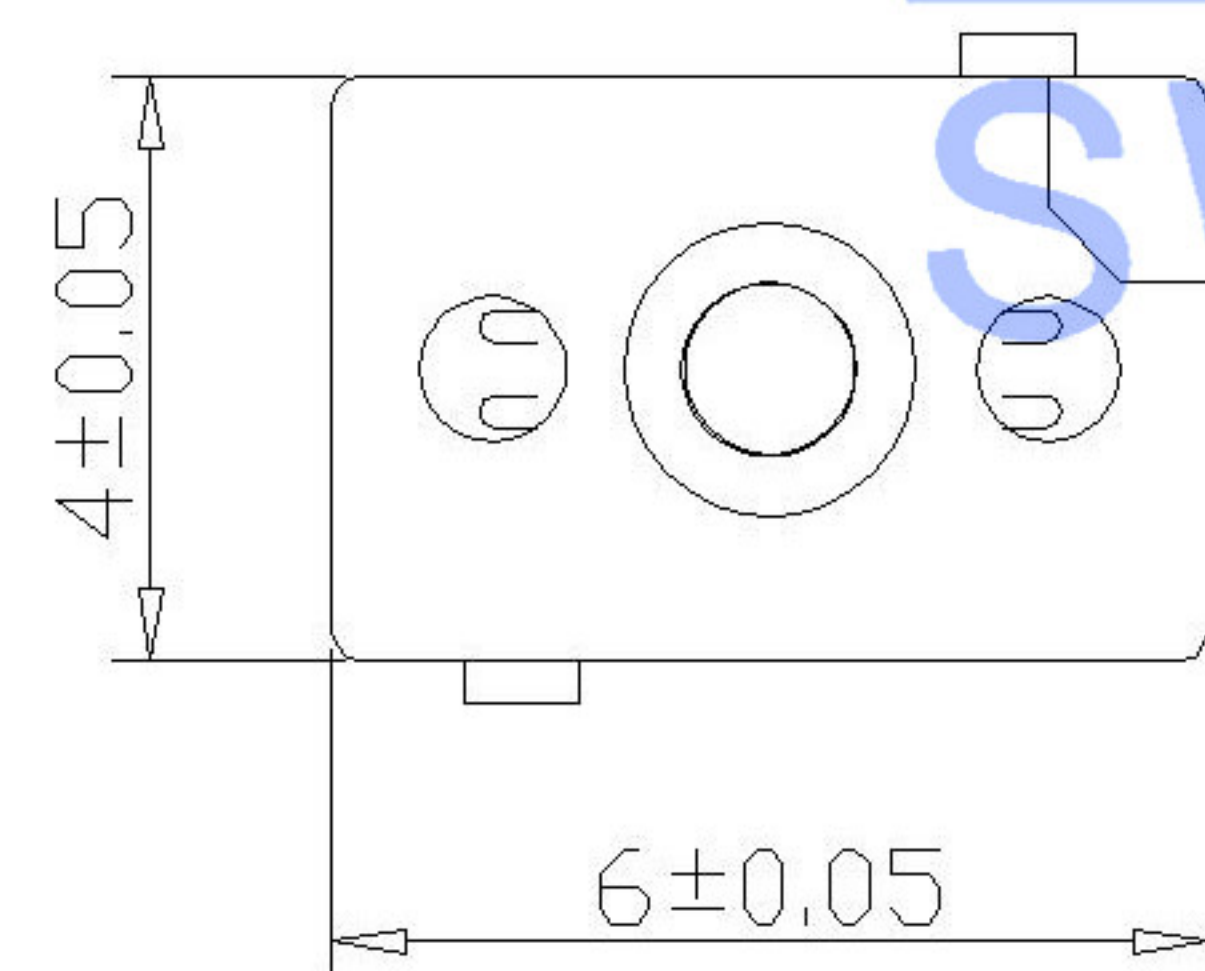


Specifications

CONTACT RATING: 0.1A @ 30 VDC.
MECHANICAL & ELECTRICAL LIFE: 50,000 cycles.
CONTACT RESISTANCE: 150 Ω max. initial.
INSULATION RESISTANCE: 100 Ω min. @ 100 VDC.
OPERATING TEMPERATURE: -20°C to +70°C.
DIELECTRIC STRENGTH: 100 volts AC @ 60 Hz.
PACKAGING: Bulk.



⑥	Spring	—	1	SUS	Natural	
⑤	Contact	—	1	Be Alloy	ag Plated	
④	Terminal	—	2	Brass	ag Plated	
③	Cover	—	1	PA6T	Black	
②	Base	—	1	PA6T	Black	
①	Keystake	—	1	PA46	Black	
ITEM	PART NAME	TER.NO	QTY	MATERIAL	FINISHING	REMARK

						DSND		DATE		SCALE: N/A	MODEL TYPE:
						DWN		DATE		VIEW: 	DETECT SWITCH
						CHKD		DATE		UNIT: mm	PART NO.:
						APPD		DATE		SIZE: A4	DWG NO.: TM-W-09
										WEIGHT	SHEET
										1.0g	1/1
										REVISION	
										A0	

REVISIONS
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

UNSPECIFIED TOLERANCES

XKB INDUSTRIAL PRECISION CO.,LIMITED