

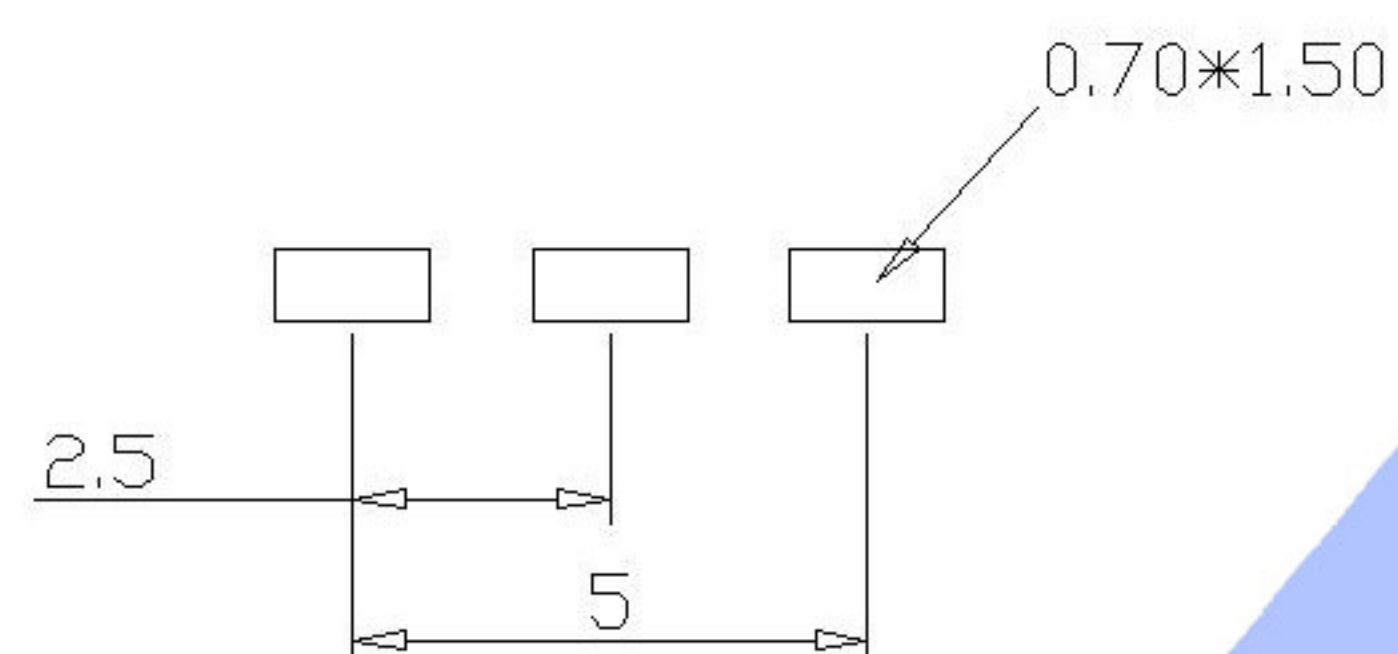


DS037-00P-60


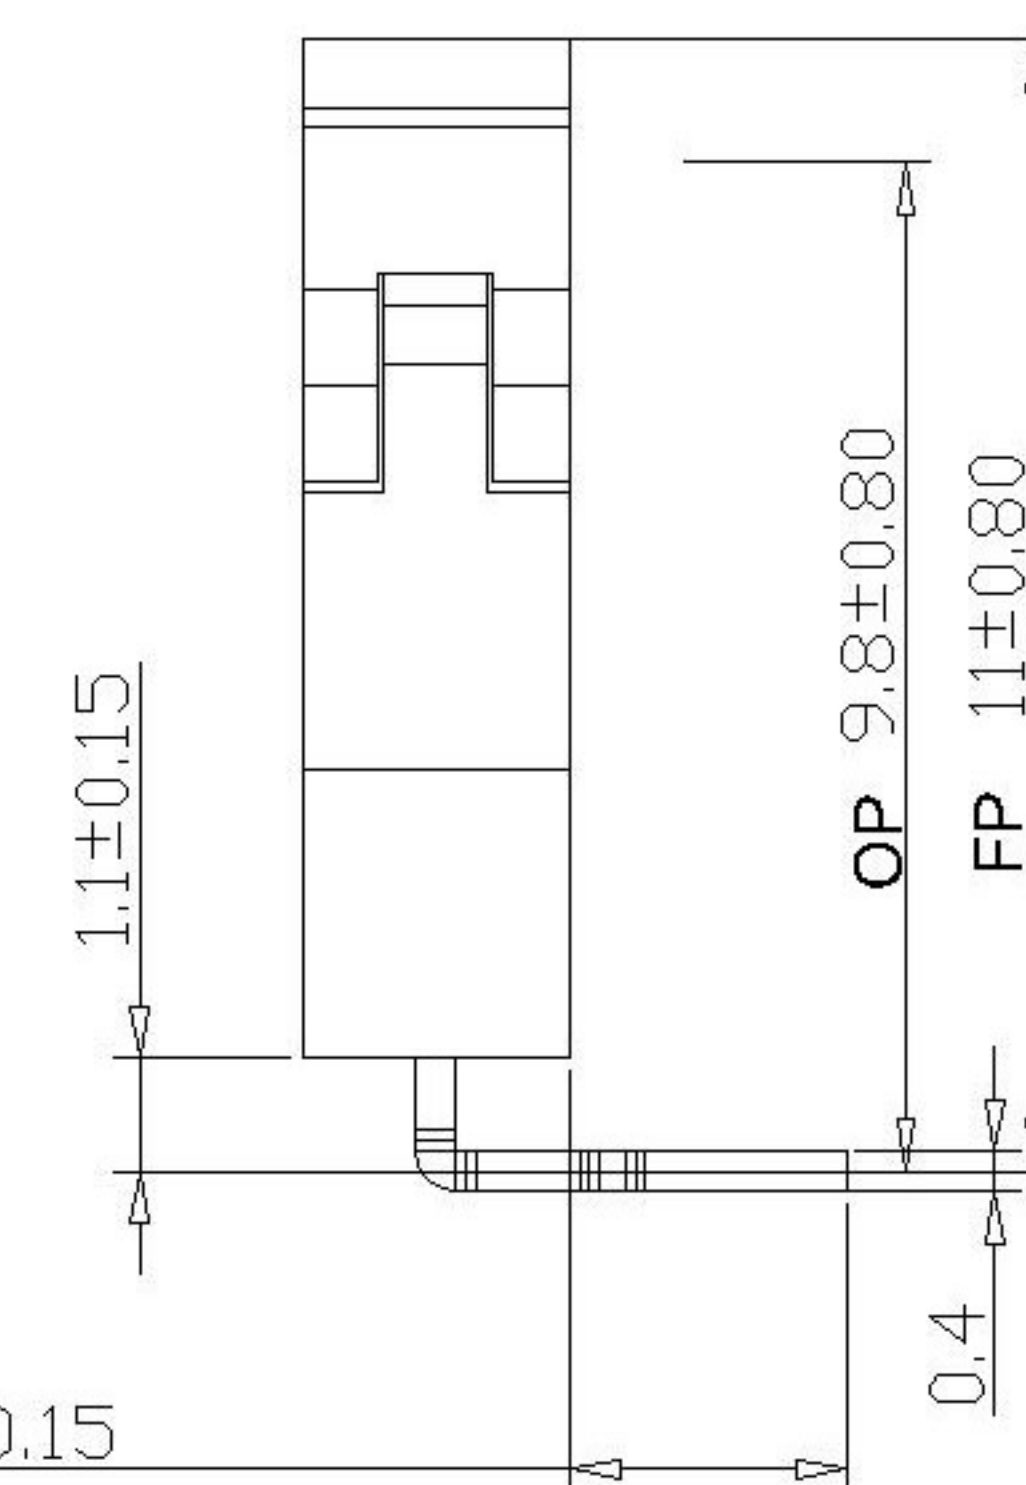


COM NO NC


<b>1. Functional spec.</b>	
<b>1.1 Rated Voltage</b>	0.3A @ DC6V;
<b>1.2 Contact Resistance</b>	$\leq 50m\Omega$ (Initial value)
<b>1.3 Operating Force</b>	
<b>1.4 Free Position</b>	
<b>1.5 Operating Position</b>	
<b>2. Reliable Rating</b>	
<b>2.1 Mechanical Life</b>	100,000 cycles
<b>2.2 Electrical Life</b>	50,000 cycles
<b>2.3 Insulation Resistance</b>	$> 100M\ \Omega$ DC100V
<b>2.4 Withstand Voltage</b>	AC250V 1 minute
<b>2.5 Soldering Temper</b>	250°C Max 3 Sec.
<b>2.6 Operating Temper</b>	-25°C - +85°C
<b>2.7 Ambient Humidity Used</b>	<85%RH

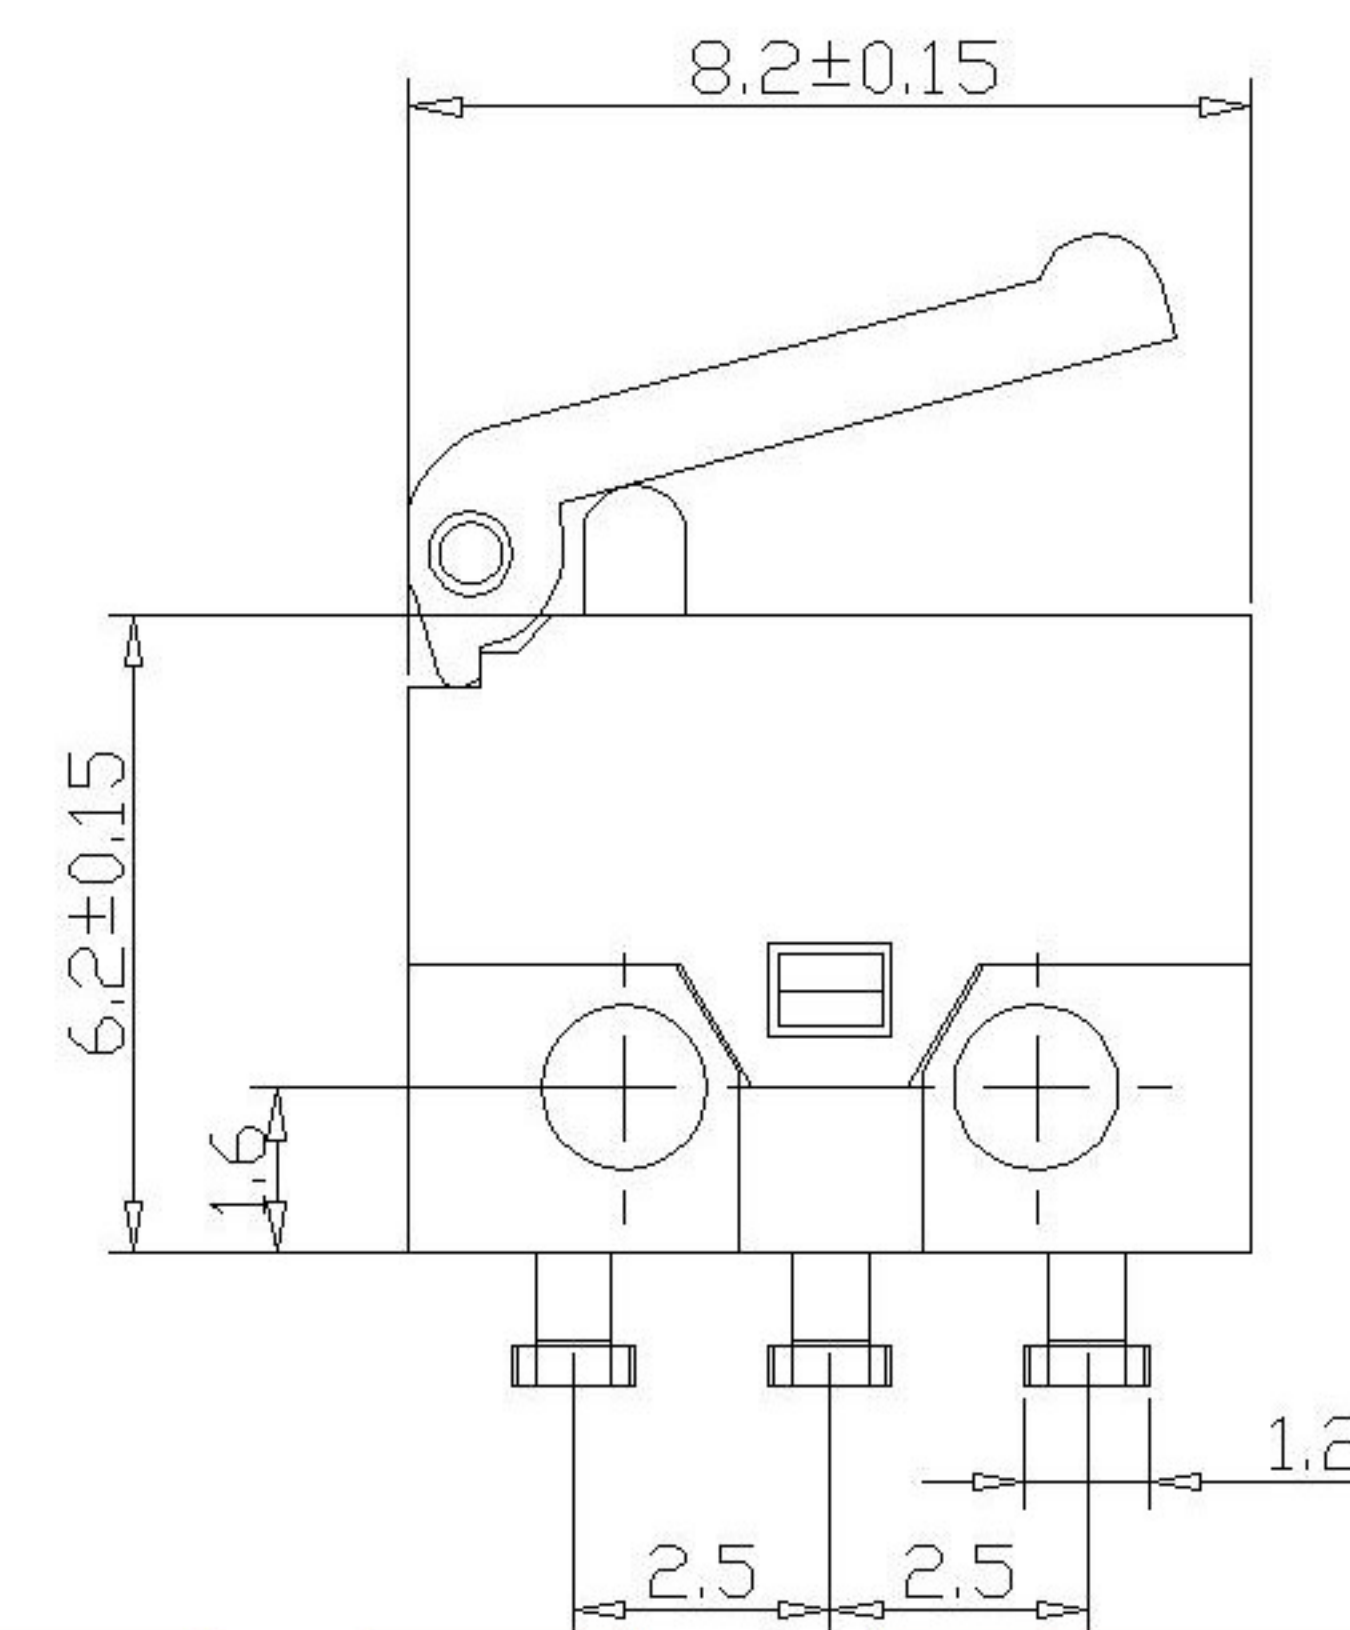

DS037-01D-30-C

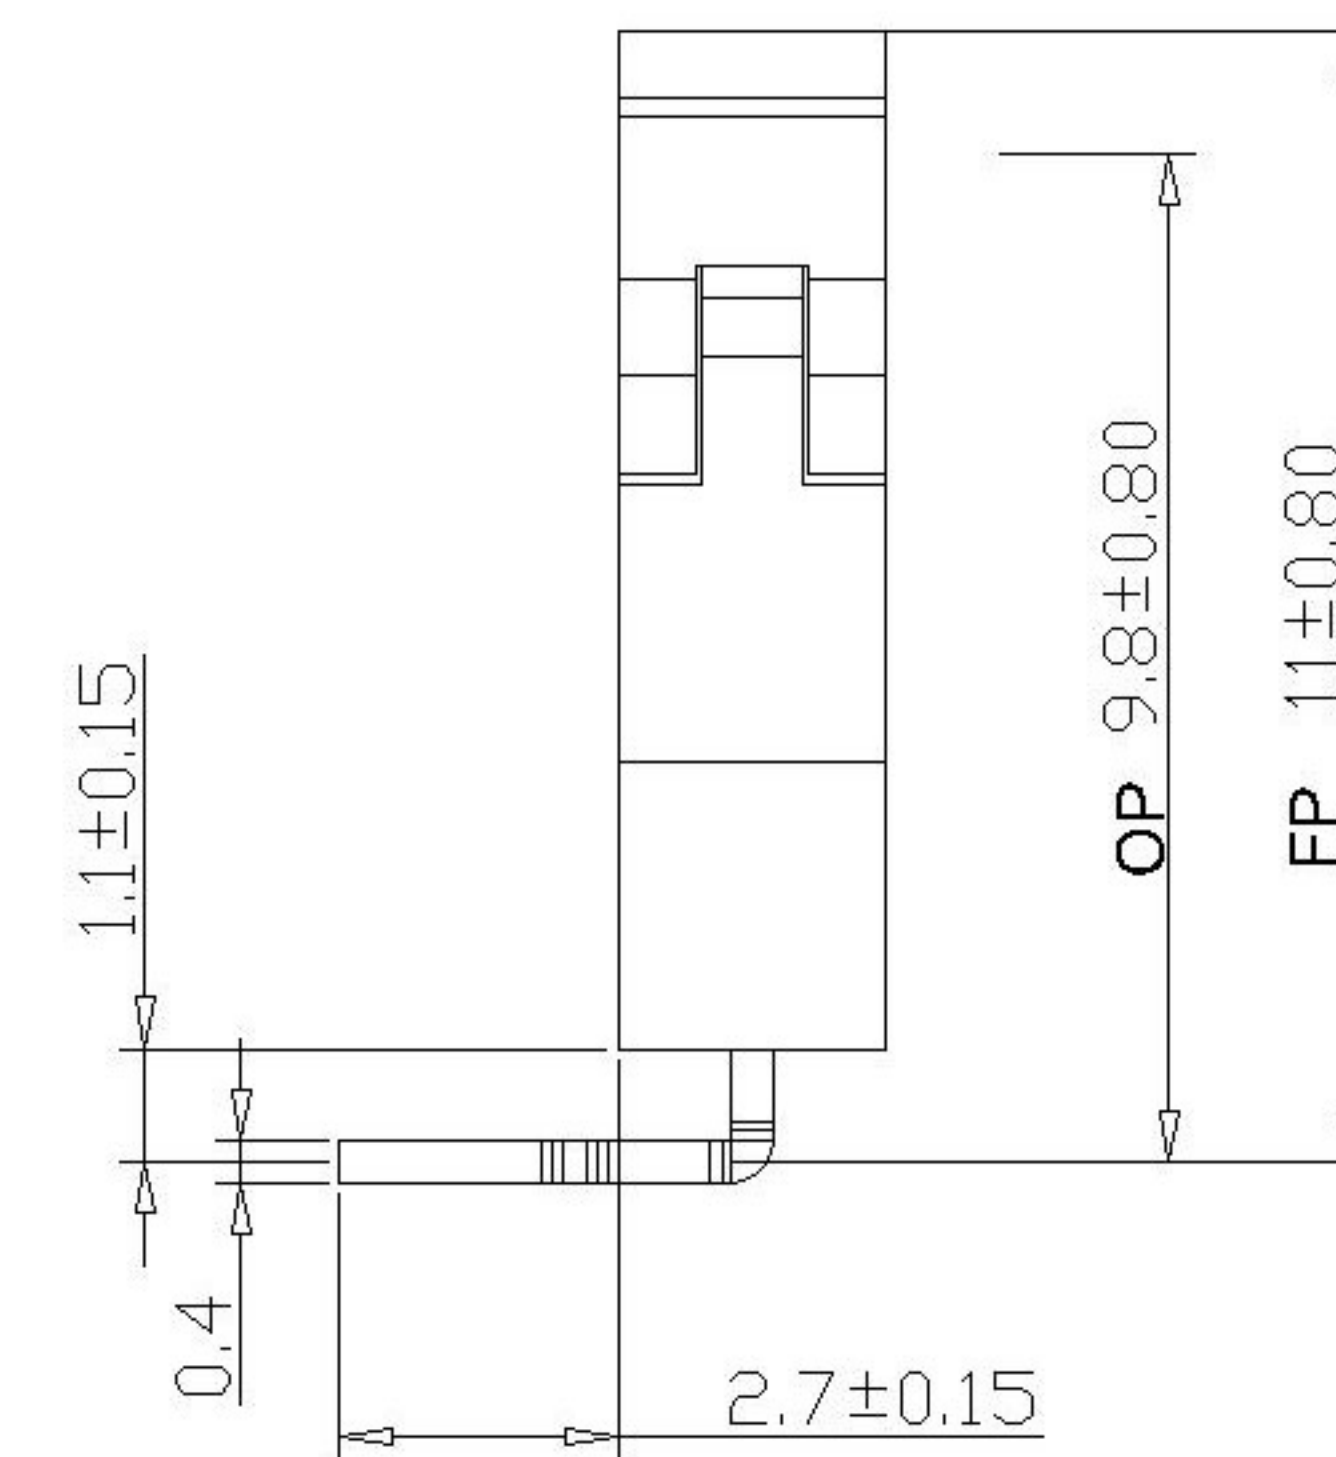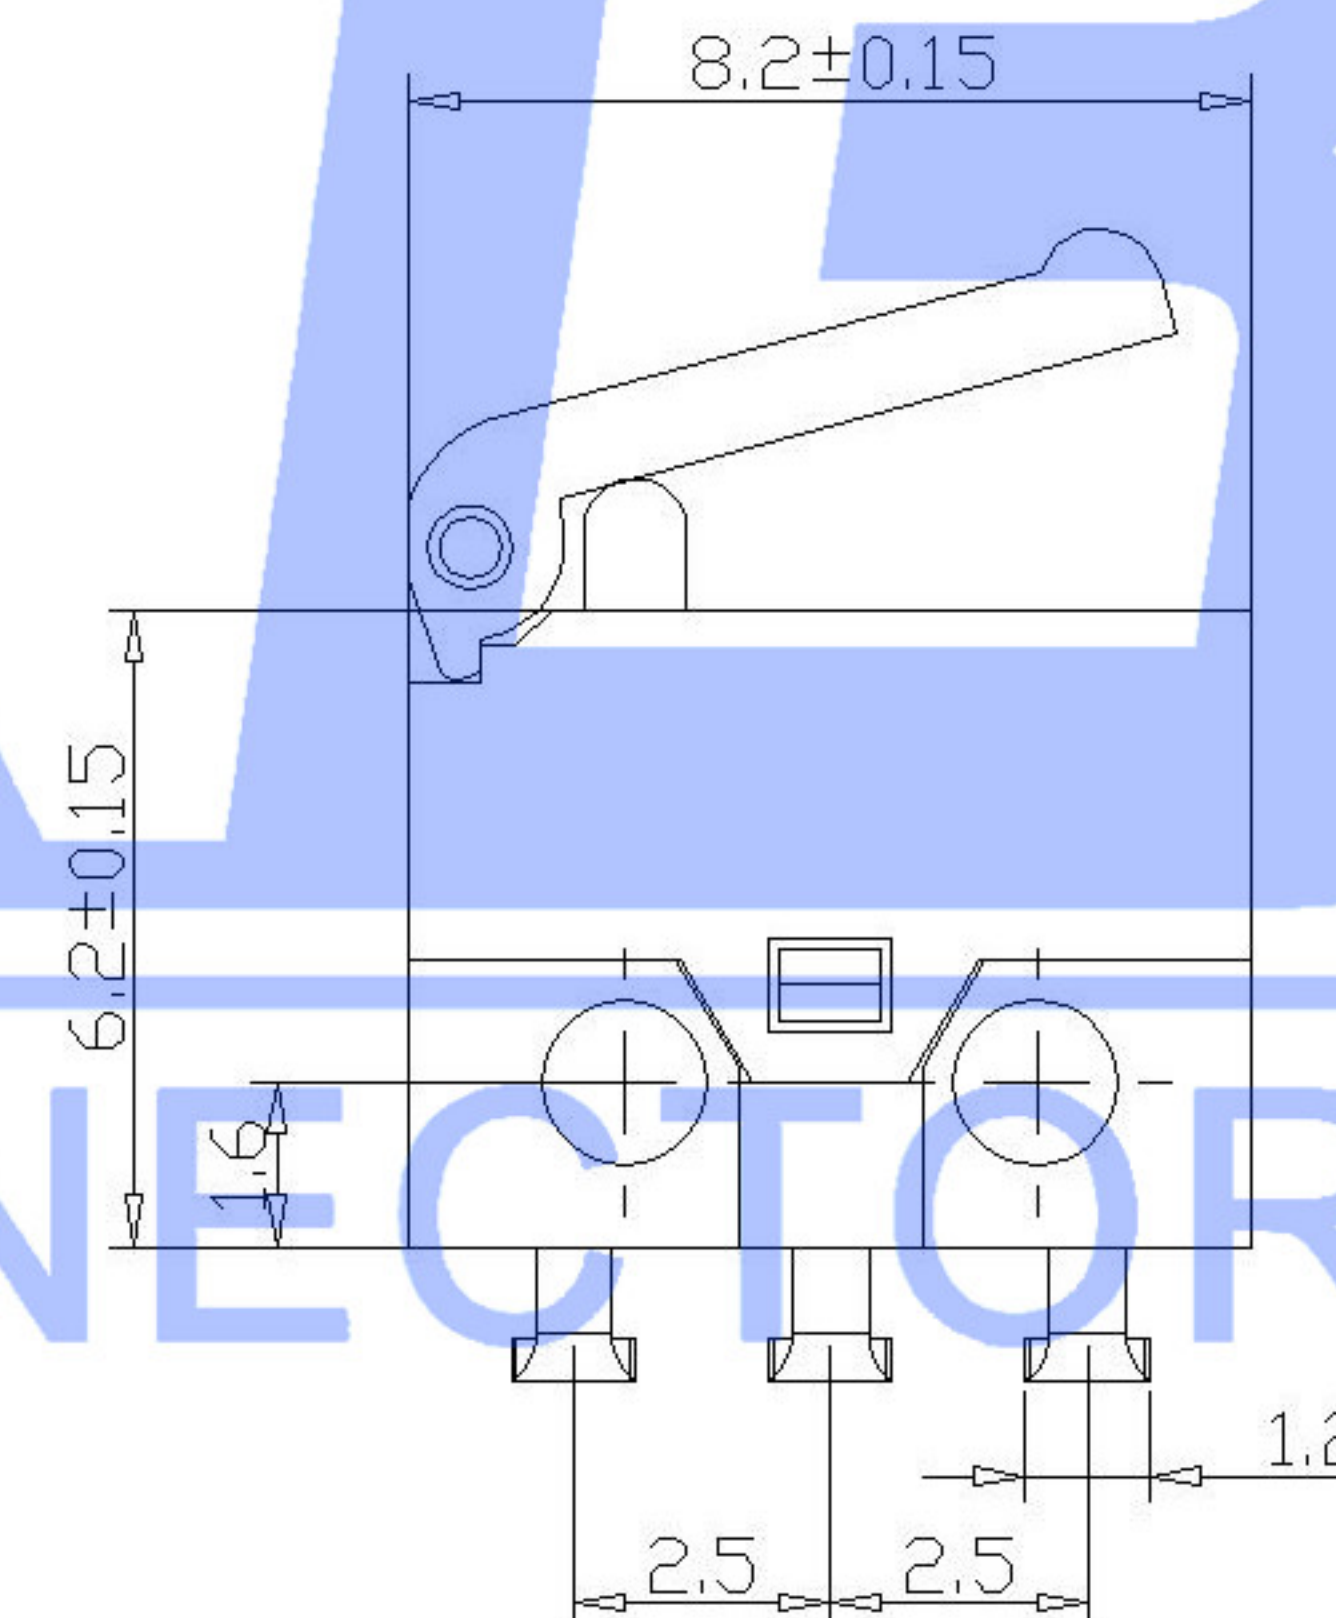

DS037-01C-30-C

							DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO SWITCH		
					ANGLAR	$\pm 5^\circ$	DWN		DATE		VIEW: 	PART NO.:		
$\Delta X$					$L \leq 4$	$\pm 0.2$	CHKD		DATE		UNIT: mm	DWG NO.:		
$\Delta X$					$4 < L \leq 16$	$\pm 0.3$	APPD		DATE		SIZE: A4	DS037-XXX-XXX		
$\Delta X$					$16 < L \leq 63$	$\pm 0.4$								
MARK	DESCRIPTION			DATE	REVISED	APPROVED								
REVISIONS						UNSPECIFIED TOLERANCES		KKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT	SHEET	REVISION
												1.0g	1/1	A0