



# SERIES TL 3330 SWITCHES

## TACT SWITCHES SMT - RIGHT ANGLE

TACT  
SWITCHES

NAVIGATION  
SWITCHES

PUSHBUTTON  
SWITCHES

TOGGLE  
SWITCHES

ROCKER  
SWITCHES

SLIDE  
SWITCHES

SNAP-ACTION  
SWITCHES

DIP  
SWITCHES

KEYLOCK  
SWITCHES

ROTARY  
SWITCHES

DETECTOR  
SWITCHES

CAP  
OPTIONS



### SPECIFICATIONS

Contact Rating:	50mA @ 12 VDC
Life Expectancy:	50,000 cycles-F130 30,000 cycles-F260
Contact Resistance:	100mΩ
Insulation Resistance:	100MΩ
Dielectric Strength:	250 VAC
Actuation Force:	130± 40 gf, 260± 50 gf
Operating Temperature:	-20°C to 70°C
Travel:	0.25mm ± 0.15mm

### FEATURES & BENEFITS

- ▶ Multiple gram force options
- ▶ Small profile works great for many consumer electronic applications

### APPLICATIONS/MARKETS

- ▶ Telecommunications
- ▶ Consumer Electronics
- ▶ Audio/visual
- ▶ Medical
- ▶ Testing/instrumentation
- ▶ Computer/servers/peripherals

### MATERIALS

Actuator:	Nylon
Base:	Nylon
Cover:	Tin Plate
Terminals:	Copper alloy, plated



### HOW TO ORDER

SERIES	MODEL NO.	ACTUATOR ("L" Dimension)	OPERATING FORCE	CONTACT MATERIAL	TERMINATION
TL	3330	A = 3.50mm [.138 in]	F130 F260	Q = Silver	G = Gull Wing

**Example Ordering Number**  
TL-3330-A-F260-Q-G

Specifications subject to change without notice.

### TL 3330

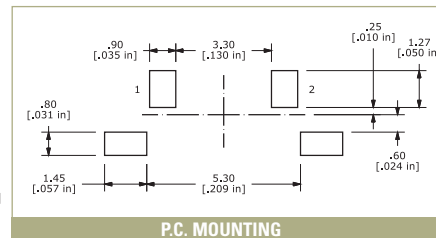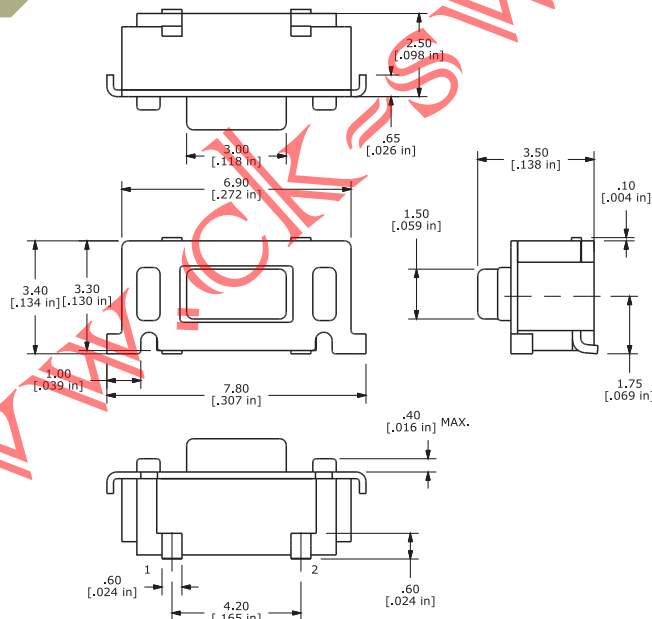

P.C. MOUNTING

