


# SERIES TL3315 SWITCHES

## TACT SWITCHES SMT - LOW PROFILE

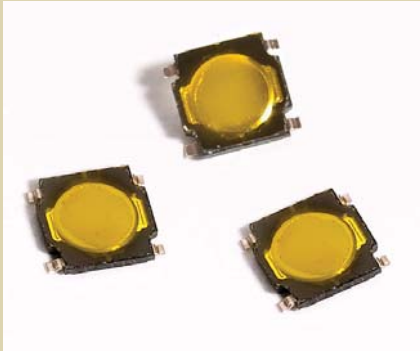

### FEATURES & BENEFITS

Very low profile  
Surface Mount

### APPLICATIONS / MARKETS

Consumer Electronics  
Audio/visual  
Medical  
Testing/Instrumentation  
Telecommunications  
Computer/Servers/Peripherals

### MECHANICAL SPECIFICATIONS

Force:	100 +/- 30 gf; 160 +/- 50 gf; 250 +/- 50 gf
Travel:	0.20mm

### ELECTRICAL SPECIFICATIONS

Electrical Life:	1,000,000 cycles - 100 gf 500,000 cycles - 160 gf 200,000 cycles - 250 gf
------------------	---

Contact Rating:	50mA @ 15VDC
Contact Resistance:	200mΩ (initial max)
Insulation Resistance:	50MΩ (Min @ 100VDC)
Dielectric Strength:	250VAC

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-20°C to +70°C
Storage Temperature:	-25°C to +80°C

### HOW TO ORDER:

SERIES

TL

MODEL NO.

3315

ACTUATOR





N = None

OPERATING  
FORCE

F100 = 100 grams  
F160 = 160 grams  
F250 = 250 grams

PLATING

Q = Silver

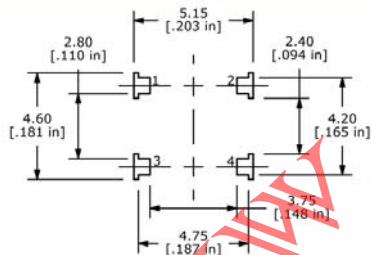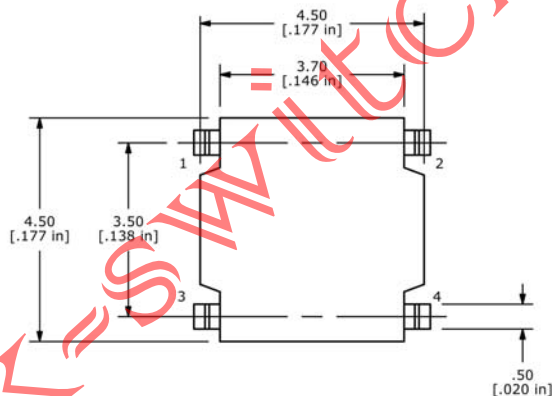

MOUNTING

