


Circuit diagram

Typical Specifications :

- 1. Rating : DC 12V 50mA
- 2. Operating force: 1st 60±30gf
2st 250±50gf
- 3. Travel: 1st 0.45mm 2st 0.15mm
- 4. Life:100,000 Cycles Min.

PCB Layout(Pattern side)

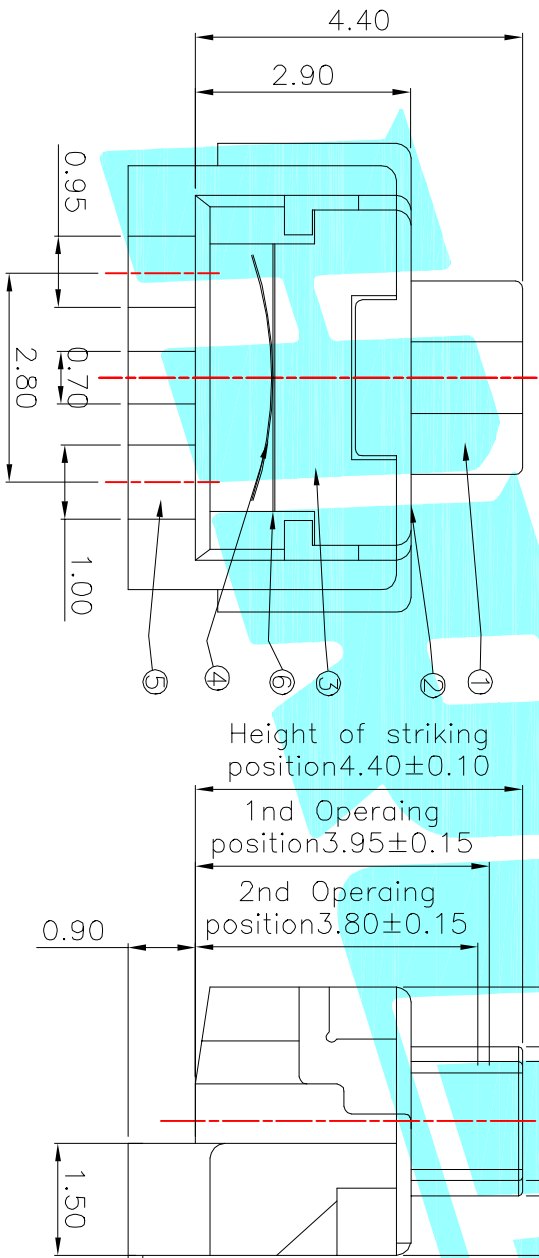

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

⑦	Silicone shell	—	1	Silicone	—	—
⑥	Dust cover	—	1	KAPTON FILM	—	—
⑤	Terminal	—	3	Phosphor Bronze Plating silver	—	—
④	Contact	—	1	F.Ag/SUS	—	—
③	Base	—	1	LCP	Black	—
②	Cover	—	1	SUS	—	—
①	Keystroke	—	1	Nylon	WHITE	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	TITLE:
DRAWN	2015.5.19	ELECTRONICS CO.,LTD

CHECKED		PART NO.	K2-1826FS
APPROVALS		UNIT: mm	SCALE: 1:1
TOLERANCES ARE	±0.30	ANGLE	PROJ. 1 OF 1
	10~30	±0.20	
	5~10	±0.15	
	~5	±0.10	