




Typical Specifications  
1.Rating : DC 12V 50mA  
2.Contact Resistance: ≤100mΩ  
3.Travel:0.2±0.05mm  
4.Life : 100,000 Cycles




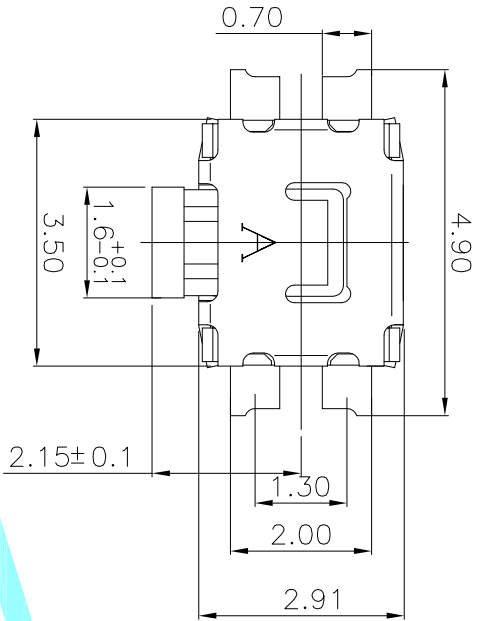


NO.1	
PART NO	vigor
3	180±30
4	250±30

NO.2	
PART NO	MATERIAL/QTY
D	SUS/2PC

NO.3—NO.4		
PART NO	NOTE	
01~99	SERIAL NUMBER	

Circuit Diagram

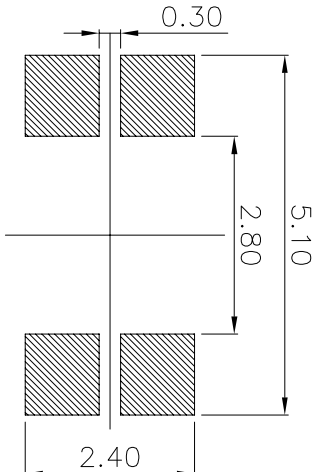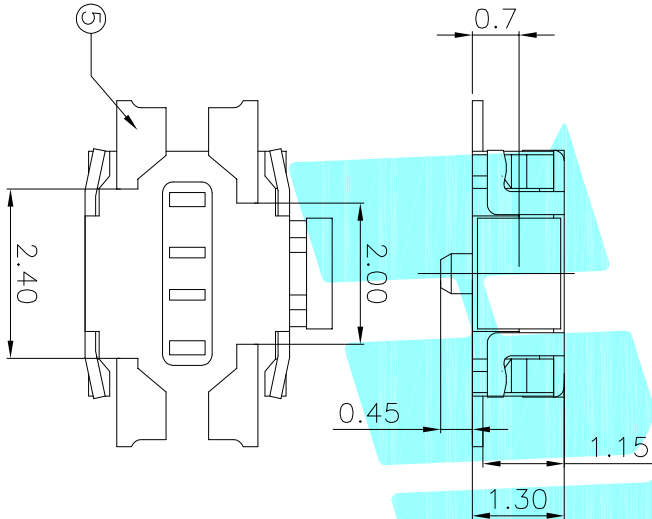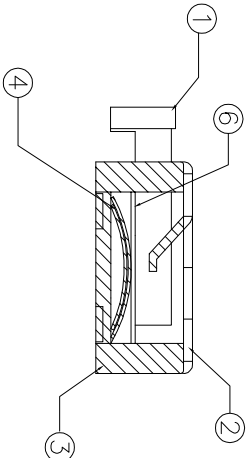

PCB Layout(Pattern side)

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Dust cover	—	2	Kapton film	Yellow	—
⑤	Terminal	—	4	Phosphor Bronze	Plating silver	—
④	Contact	—	2	SUS	Plating silver	—
③	Base	—	1	LCP	White	—
②	Cover	—	1	Brass	Plating silver	—
①	Knob	—	1	PA46	Black	—

APPROVALS		DATE	TITLE:	
DRAWN	J.X.Zhang	2018/8/1	ELECTRONICS CO.,LTD	

						TITLE: TACT SWITCHES	
						PART NO.	K2-1821SH-A00W-00
						APPROVALS	
						TOLERANCES ARE	
						30~以上	±0.30
						10~30	±0.20
						5~10	±0.15
						~ 5	±0.10
						ANGLE	±2°
						UNIT: mm	SCALE: 1:1
						DRAWING NO.	PROJ: 
							
							SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	
	A		NEW				