

Circuit diagram

PCB Layout(Pattern Side)





| NO.2 | |
|---------|--------|
| PART NO | vigor |
| 3 | 180±30 |
| 4 | 250±30 |
| 5 | 350±50 |

| NO.3 | |
|---------|-------------|
| PART NO | MATERIAL/QT |
| S | SUS/1Pc |

| NO.4-NO.5 | |
|-----------|---------------|
| PART NO | NOTE |
| 01~99 | SERIAL NUMBER |

Typical Specifications :
1. Rating : DC 12V 50mA
2. Life:1,000,000 Cycles Min.

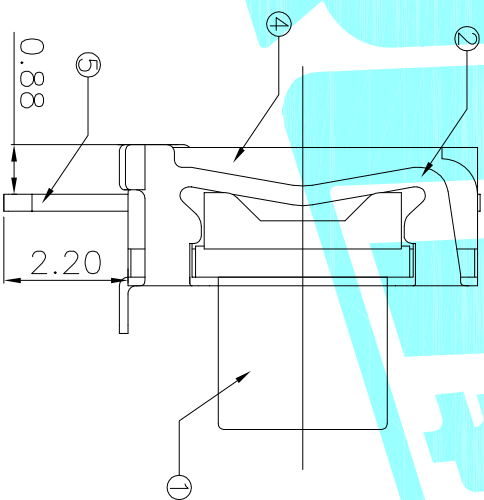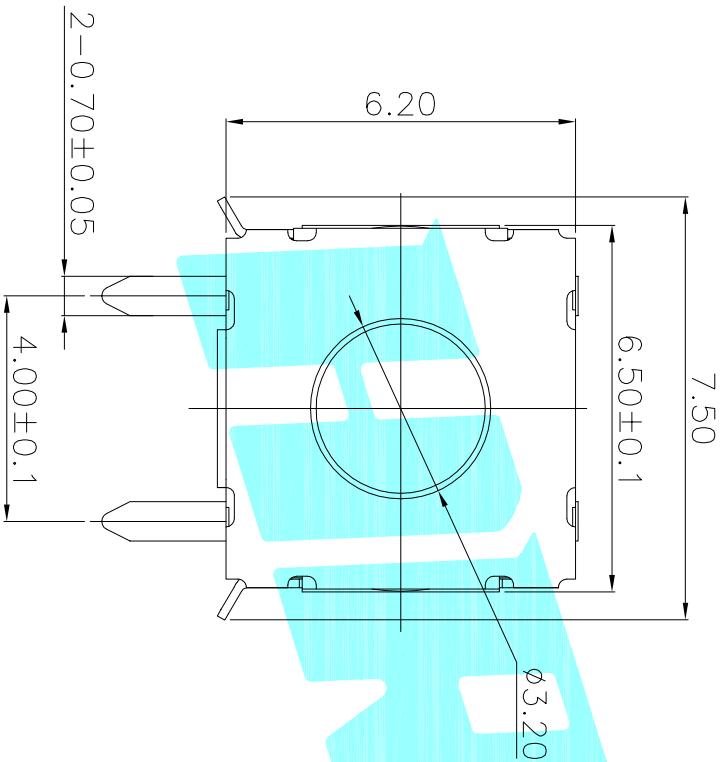

| ⑤ | Terminal | — | 2 | Brass(0.30t) | Plating silver | — |
|------|-----------|---------|------|--------------|----------------|--------|
| ④ | Base | — | 1 | PA6T | Black | — |
| ③ | Contact | — | 1 | F.Ag/SUS | — | — |
| ② | Cover | — | 1 | SUS | — | — |
| ① | Keystoke | — | 1 | RUBBER | Black | — |
| ITEM | PART NAME | TER'NO. | QTY. | MATERIAL | FINISHING | REMARK |

| APPROVALS | | DATE | ELECTRONICS CO.,LTD | |
|-----------|---------|----------|---------------------|--|
| DRAWN | JKUN.LU | 2018/8/1 | | |

| CHECKED | | TITLE: | | TACT SWITCHS | |
|----------------|--|----------|-------------------|--------------|--|
| APPROVALS | | PART NO. | K2-1157DW-COSW-□□ | PROJ: | |
| TOLERANCES ARE | | UNIT: mm | SCALE: 1:1 | SHEET 1 OF 1 | |
| ECN NO. | | REV | DATE. | DESCRIPTION. | |
| A | | | | NEW | |
| CHANGE. | | CHECK. | APPRO. | | |