
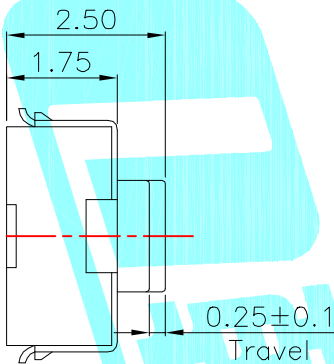


Circuit diagram

PCB Layout (Pattern Side)

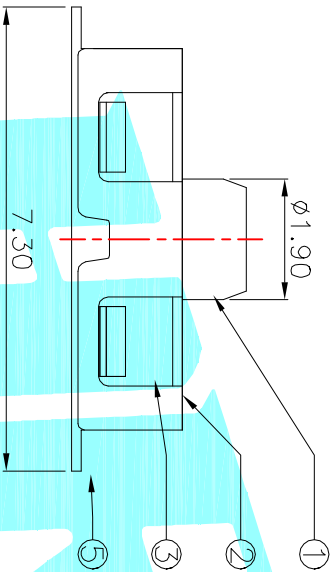

NO.1	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3-NO.4	
PART NO	NOTE
01~99	SERIAL NUMBER

NO.2	
PART NO	MATERIAL/QTY
S	SUS/1PC
D	SUS/2PCS

- Notes:
- 1.Rating: 12V DC 50ma
  - 2.Contact resistance: 100mΩ Max
  - 3.Insulation resistance: 100MΩ 250vac for 1Min
  - 4.Dielectric strength: 250V AC(50/60hz) for 1Min
  - 5.Life test:100,000 Cycles
  - 6.Travel:0.25±0.1mm

⑤	Terminal	—	2	Phosphor Bronze	Plating silver	—
④	Contact	—	1	SUS	Plating silver	—
③	Base	—	1	Nylon	Black	—
②	Cover	—	1	SUS	Natural	—
①	Keystroke	—	1	Silica gel	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	TACT SWITCHES		
DRAWN	JKUN,LU	2016/6/30	ELECTRONICS CO.,LTD		

CHECKED		TITLE:		TACT SWITCHES	
APPROVALS		PART NO.		K2-1111SQ-A00W-□□	
TOLERANCES ARE		UNIT: mm		SCALE: 1:1	
30~12.5 ±0.30		ANGLE		PROJ. ④	
10~30 ±0.20		UNIT: mm		SCALE: 1:1	
5~10 ±0.15		DRAWING NO.		SHEET 1 OF 1	
~ 5 ±0.10		DRAWING NO.		SHEET 1 OF 1	
ECN NO.		REV.		DATE.	
NEW		CHANGE.		CHECK.	
APPRO.		APPRO.		APPRO.	