


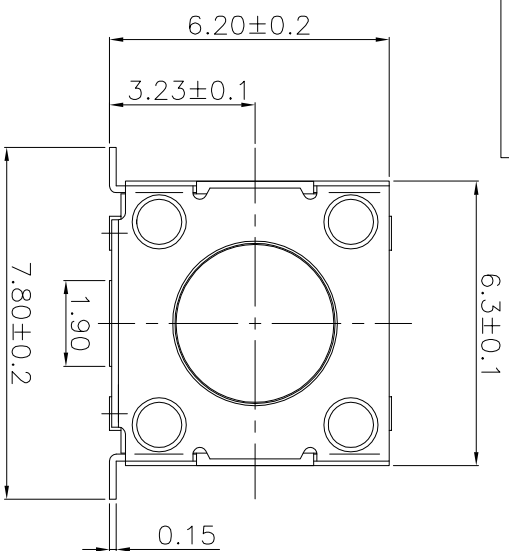


Typical Specifications :

1. Rating : DC 12V 50mA
2. Life:300,000 Cycles Min.

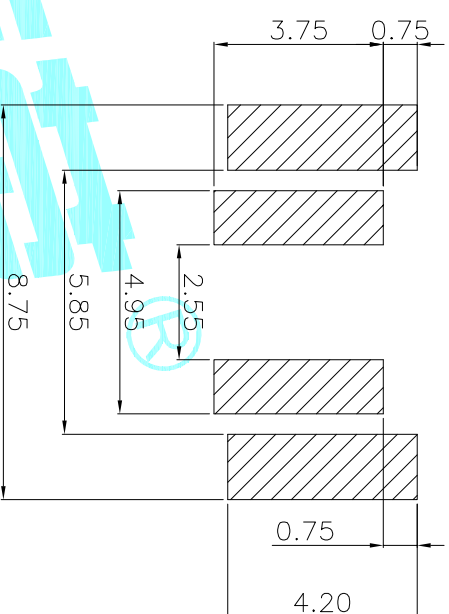

## Circuit diagram

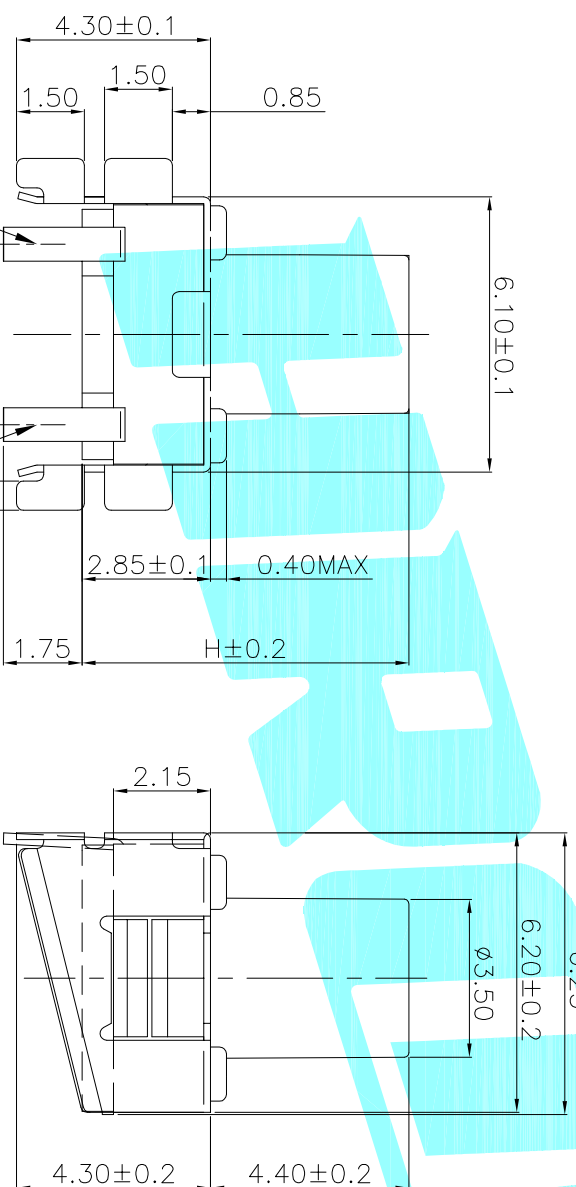

## PCB Layout(Pattern Side)

NO.1	
PART NO	H
A	4.3
B	4.5
C	5
D	5.5
E	6
F	6.5
G	7
H	7.5
I	8

NO.2	
PART NO	vigor
3	180±30
4	250±30

NO.3	
PART NO	MATERIAL/QT
S	SUS/1PC

NO.4-NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER./NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	2	Bross(0.30t)	Plating silver	—
④	Base	—	1	PPA	Black	—
③	Contact	—	1	F.Ag/SUS	—	—
②	Cover	—	1	SPCC	—	—
①	Keystoke	—	1	PPA	Black	—

[illegible]