

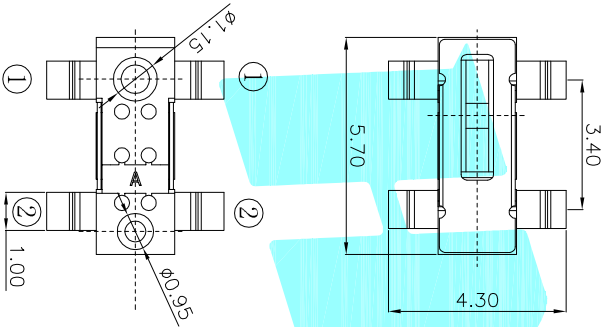
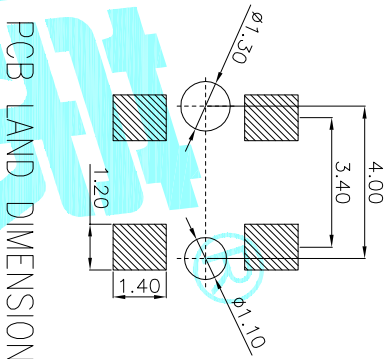


动作方向

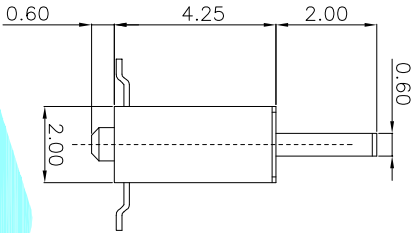

技术要求:

1. 额定负荷: DC 12V 50mA
2. 绝缘电阻:  $\geq 100M\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 50000次
5. 环境温度:  $-10^{\circ} \sim +60^{\circ}$
6. 相对湿度:  $40^{\circ}C \leq 95\%$
7. 接触电阻:  $\leq 100M\Omega$
8. 接触行程:  $0.5 \pm 0.2$
9. 动作力: 30gf

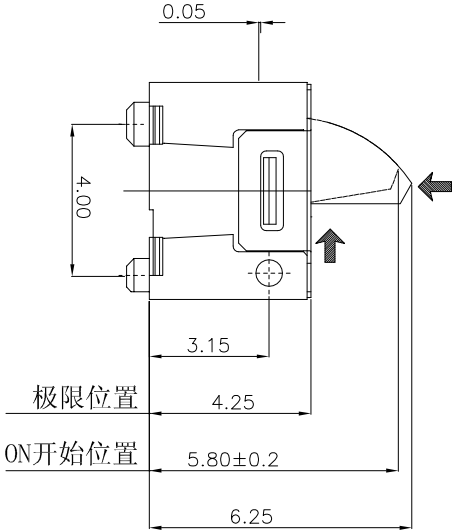

CIRCUIT DIAGRAM

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Contact Spring	—	1	SUS	Natural	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	PA66	Black	—
②	Cover	—	1	SUS	Black	—
①	Knob	—	1	POM	Black	—

APPROVALS		DATE	ELECTRONICS CO.,LTD	
DRAWN	J.X.Zhang	2018/8/1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
			TOLERANCES ARE	30~0.15 10~0.30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°
			PART NO.	K5-1673SA-01		
			SCALE:	1:1		
			DRAWING NO.	SHEET 1 OF 1		