





Circuit Diagram

NOTE:
Rating: DC 30V 0.1A
Operating Force: 20±10gf
Lifetime: 50,000 Cycles
Packaging: 2800pcs/Reel

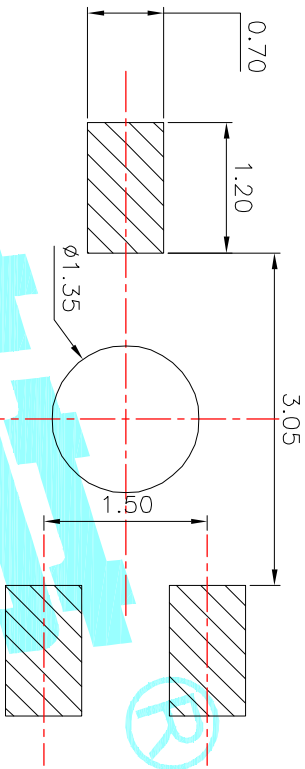

PCB Layout(Pattern side)

NO.	Slider height(H)	ON start position(A)	Total travel(B)
01	3.8	3.5	2.5
02	4.1	3.8	2.9
03	4.8	4.5	3.6
04	5.2	4.9	4.0
05	5.5	5.2	4.3

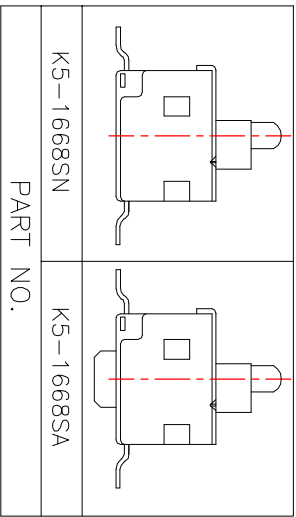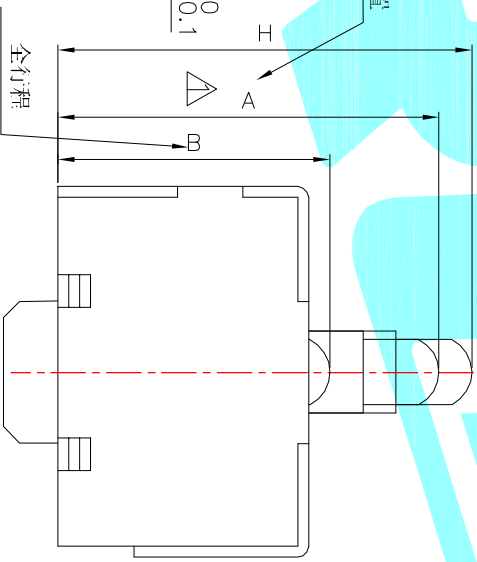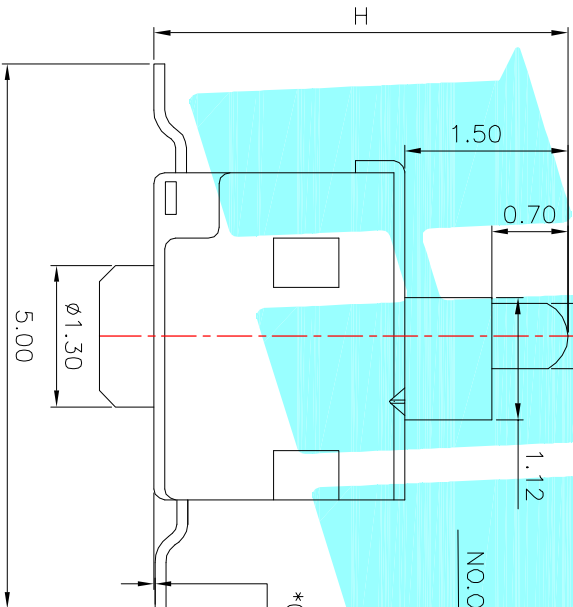

PART NO.	K5-1668SN	K5-1668SA
----------	-----------	-----------

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Contact Spring	—	1	Be Alloy	Ag Plated	—
④	Terminal	—	3	Brass	Ag Plated	—
③	Housing	—	1	PA46	Black	—
②	Cover	—	1	Brass	Ag Plated	—
①	Slider	—	1	PA46	Black	—

APPROVALS	DATE	TITLE:
DRAWN JKUN.LU	2015.5.11	ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	B	—	NEW	—	—	—
—	A	—	—	—	—	—
—	—	—	—	—	—	—