



NOTE:
Rating: DC 30V 0.1A
Operating Force: 40±10gf
Lifetime: 100,000 Cycles

PART NO.	H
K5-1130SA-01	8.5
K5-1130SA-02	11.0
K5-1130SA-03	12.3
K5-1130SA-04	13.7

Circuit Diagram



Detail of P (SCALE: 2:1)

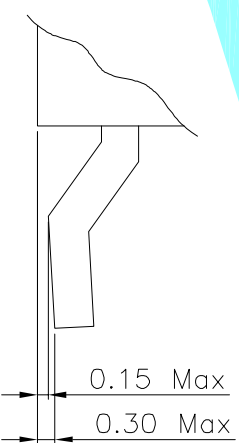

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
30±0.15			±0.30	ANGLE		
10~30			±0.20	UNIT: mm		
5~10			±0.15	SCALE: 1:1		
~5			±0.10	DRAWING NO.		
~5			±0.10	SHEET 1 OF 1		

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	NYLON	Black	—
①	Knob	—	1	NYLON	Black	—
APPROVALS						
DRAWN		DATE		TITLE:		
JKUN.LU		2015.03.17		DETECTOR SWITCHS		
CHECKED		DATE		PART NO.		
APPROVALS		DATE		SCALE: 1:1		
APPROVALS		DATE		DRAWING NO.		
APPROVALS		DATE		SHEET 1 OF 1		

ELECTRONICS CO.,LTD

