





ROHS

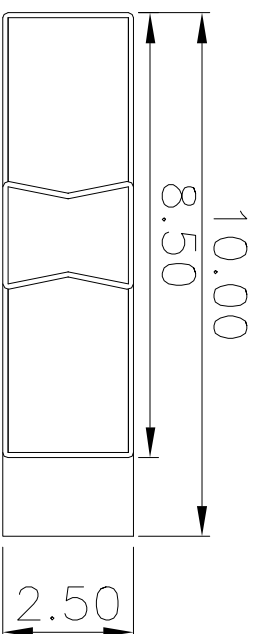

- ### Typical Specifications
1. Rating : 5A120V AC
 2. Insulation Resistance:1,000M min
 3. Dielectric Strength:1,500V RMS
 4. Operating Life : 50,000 cycles



Schematic(Shorting)

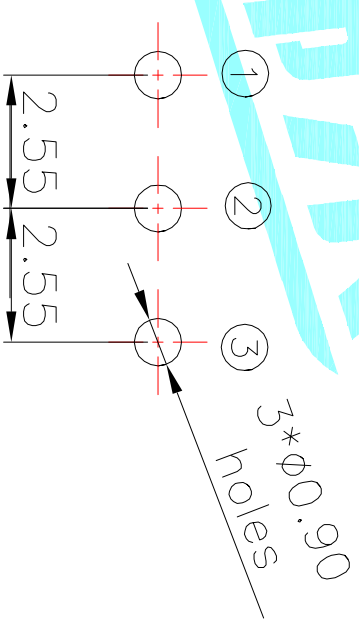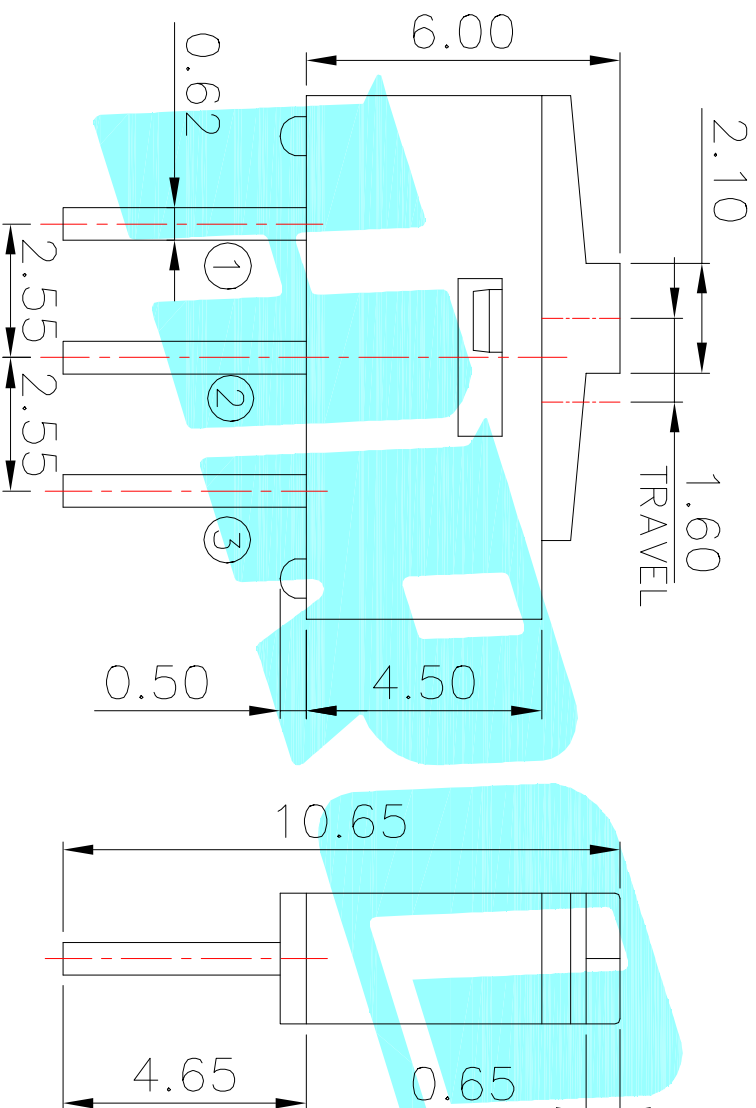

P.C.B layout

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Spring	—	1	Stainless Steel	Natural	—
④	Contact Clip	—	1	C5210	Ag Clad	—
③	Knob	—	1	PA	RED	—
②	Base	—	1	PA	Gray	—
①	Terminal	—	3	Brass	Au Plated	—

				CHECKED		TITLE:	SLIDE SWITCHES		
				APPROVALS		PART NO.	K3-1204D		
A			NEW						
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE		
							<div>30~$\frac{H}{h}$</div> <div>±0.30</div> <div>ANGLE</div> <div>UNIT: mm</div> <div>SCALE: 1:1</div> <div>PROD. </div> <div>SHEET 1 OF 1</div>		
							<div>10~30</div> <div>±0.20</div> <div>±2°</div> <div>DRAWING NO.</div>		
							<div>5~10</div> <div>±0.15</div> <div>±7°</div>		
							<div>~5</div> <div>±0.10</div>		