

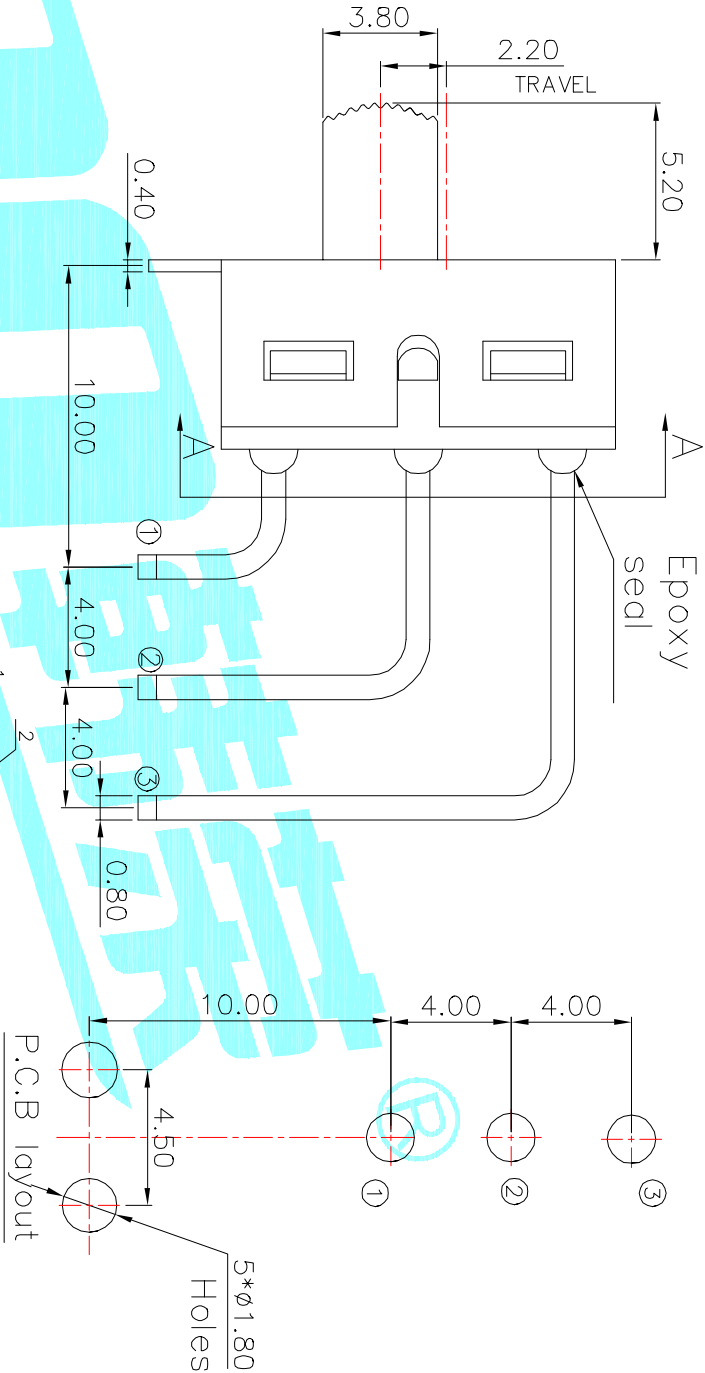
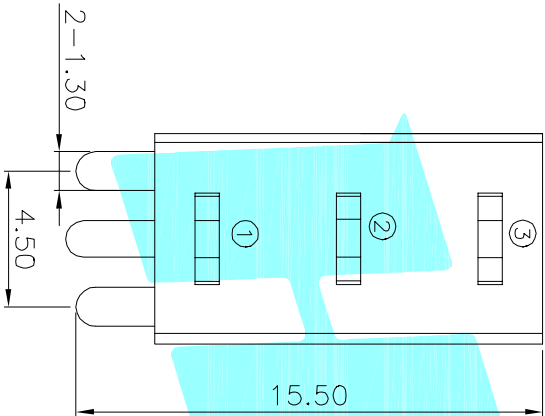


ROHS

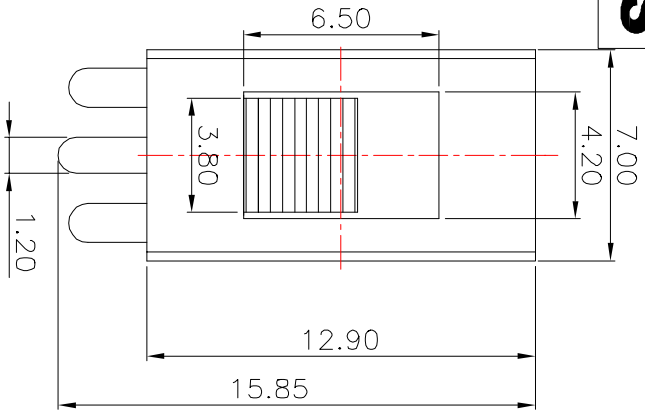

- Typical Specifications
1. Rating : 5A120V AC
 2. Insulation Resistance:1,000M min
 3. Dielectric Strength:1,500V RMS
 4. Operating Life : 30,000 cycles

Schematic(Shorting)



ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Spring	—	1	Stainless Steel	Natural	—
⑤	Contact Clip	—	1	PBS C5210R-EH	Ag Clad	—
④	Knob	—	1	PA	Black	—
③	Frame	—	1	SPCC	Ni Plated	—
②	Base	—	1	PA	RED	—
①	Terminal	—	3	Brass Strip	Ag Plated	—

A—A

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
			30~以上	±0.30	ANGLE	PART NO.
			10~30	±0.20		
			5~10	±0.15		
			~ 5	±0.10	±2'	DRAWING NO.
			TITLE:			
			SLIDE SWITCHS			
			K3-1391C			
			SCALE: 1:1			
			PROJ. 1 OF 1			