



P.C.B Layout (copper-sided view)

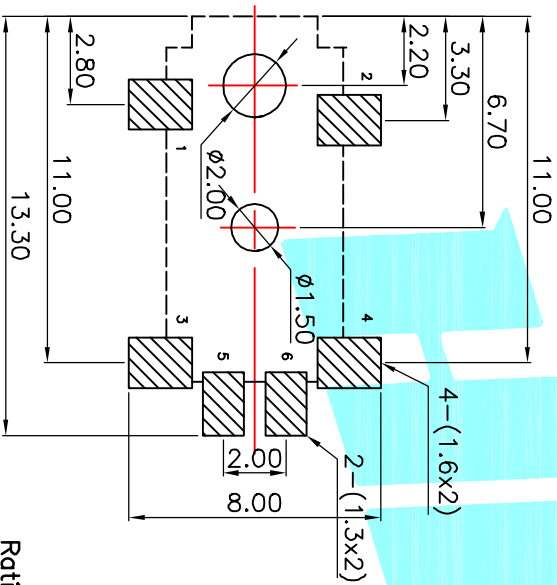

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3~20N
Operating Life:5,000cycles

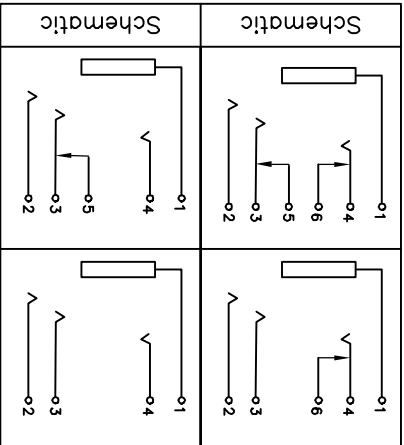

ECN NO.	REV.	DATE.	DESCRIPTION.	CHECK.	APPRO.
	A		NEW		

②	Terminal	6	Phosphor bronze	Au Plating	
①	Housing	1	Nylon	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE	REMARK		
DRAWN		J.X.Zhang	2013/11/11		
CHECKED			TITLE: PHONE JACKS		
APPROVALS			PART NO. PU-245		
TOLERANCES ARE		30~10.75	±0.30	ANGLE	SCALE: 1:1
		10~30	±0.20		PROJ. 1 OF 1
		5~10	±0.15	±2°	
		~ 5	±0.10		

HHROE
ELECTRONICS CO.,LTD