
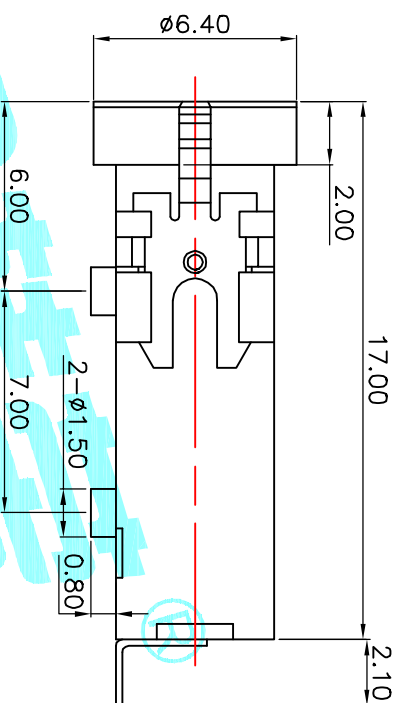


P.C.B Layout (copper-sided view)

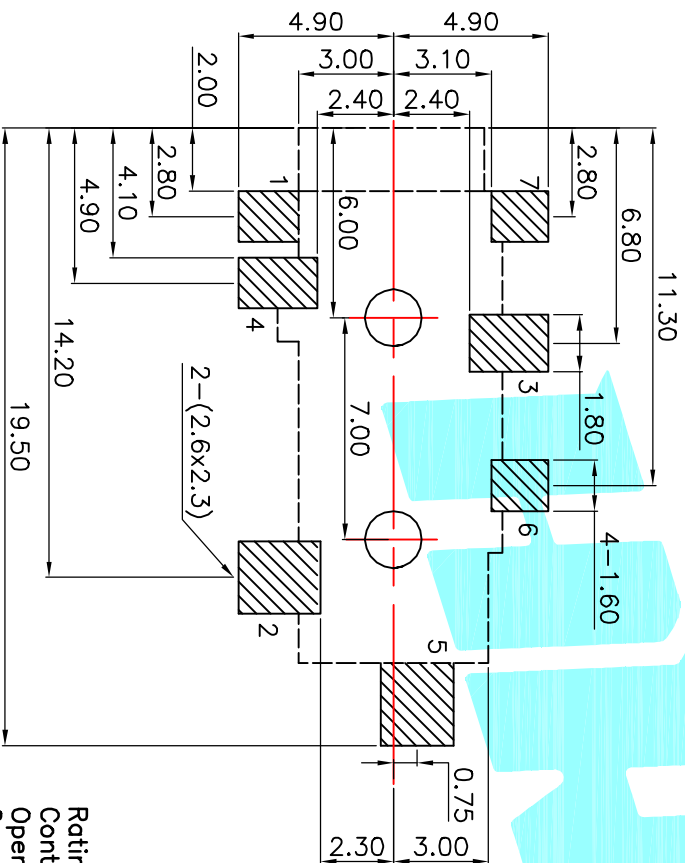

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:-20℃~70℃  
Operating force:3-20N  
Operating Life:5,000cycles

Model NO	PJ-328D-A	PJ-328D-B	PJ-328D-C
Schematic			
Model NO	PJ-328D-D	PJ-328D-E	PJ-328D-F
Schematic			

②	Terminal	—	6	Phosphor bronze	Au Plating	—
①	Housing	—	1	Nylon	Black	—
ITEM	PART NAME	TERNO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		ELECTRONICS CO.,LTD		
DRAWN		J.X.Zhang		2013/11/14		TITLE: PHONE JACKS
CHECKED						PART NO. PJ-328D
APPROVALS						SCALE: 1:1
TOLERANCES ARE		50±0.1		±0.30		UNIT: mm
		10±0.10		±0.20		SCALE: 1:1
		5±0.10		±0.15		PROJ-1
		~ 5		±0.10		SHEET 1 OF 1