


P.C.B LAYOUT(copper-sided view)

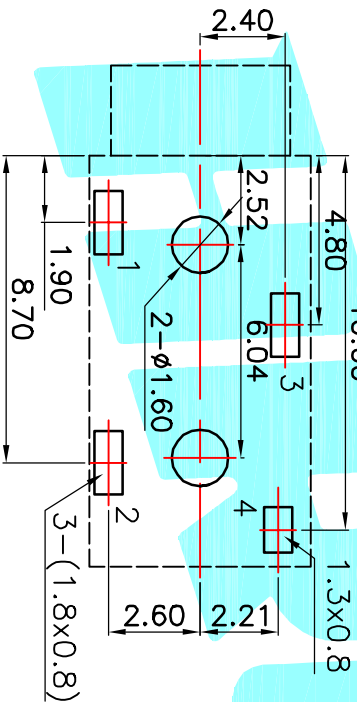

H=0.9	PJ-3270-A	PJ-3270-B	PJ-3270-C
H=1.6	PJ-3270-D	PJ-3270-E	PJ-3270-F
H=2.1	PJ-3270-G	PJ-3270-H	PJ-3270-I
H=2.8	PJ-3270-J	PJ-3270-K	PJ-3270-L
Schematic			

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
30~0.1						
10~30						
5~10						
~5						
±0.30						
±0.20						
±0.15						
±2°						
DRAWING NO.						
SHEET 1 OF 1						

②	Terminal	4	Phosphor bronze	Au Plating	
①	Housing	1	Nylon	Black	
ITEM	PART NAME	TERNO.	QTY.	MATERIAL	FINISHING
APPROVALS					
DATE					
DRAWN J.X.Zhang					
2013/11/11					
CHECKED					
APPROVALS					
TITLE: PHONE JACKS					
PART NO. PJ-3270					
SCALE: 1:1					
PROJ. PROJ.					
ELECTRONICS CO.,LTD					