


P.C.B LAYOUT(copper-sided view)
3-(0.6x2.5)

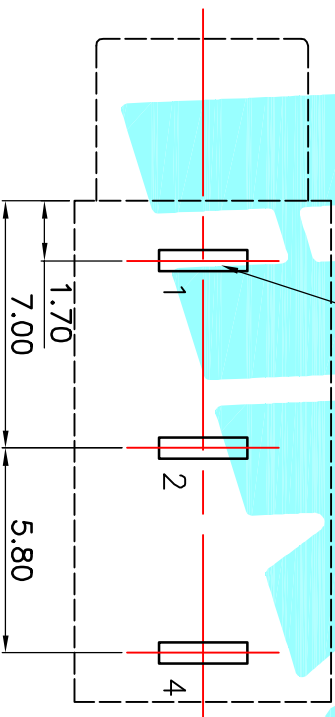

Rating:0.5A 30V DC
Contact Resistance:100 mΩ Max.
Operating temperature: -20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

Model No.	A=φ6	PJ-3230-A
	A=M6xP0.5	PJ-3230A-A
Schematic		

Rating:0.5A 30V DC						
Contact Resistance:100 mΩ Max.						
Operating temperature:-20℃~70℃						
Operating force:3-20N						
Operating Life:5,000cycles						