


P.C.B LAYOUT(copper—sided view)

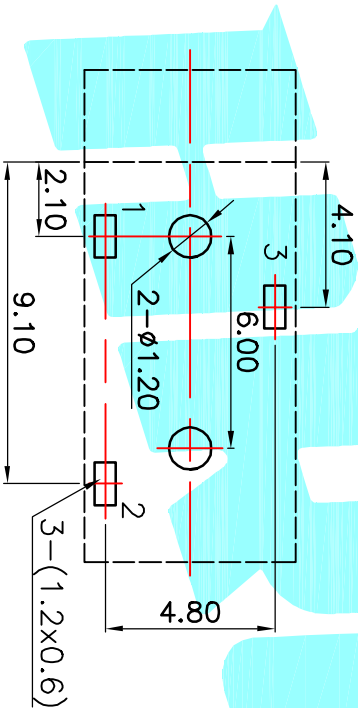

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:−20℃~70℃  
Operating force:3−20N  
Operating Life:5,000cycles

A=φ5.0	1
A=φ5.6	2
A=φ6.0	3
Schematic	

Contact Resistance:100 mΩ Max.						
Operating temperature:−20℃~70℃						
Operating force:3−20N						
Operating Life:5,000cycles						